

6AT3-T

M

DRAWING
NUMBER

7

ISSUE

7

REVISIONS

A NEW
DRAWING

11 MAR 60

B SR9154

L S D
5 AUG 60

C CO37377

K P
3 AUG 78

D CO
37753

6LM
1 NOV 76

E CO-51446

KAG
12 MAY 82

REPLACES

SR9154

NO.ETS

CHECK

3 AUG 60

DC

CHECK

5 AUG 60

CHECK

5 AUG 60


CHECK

5 AUG 60

CHECK

5 AUG 60

CHECK

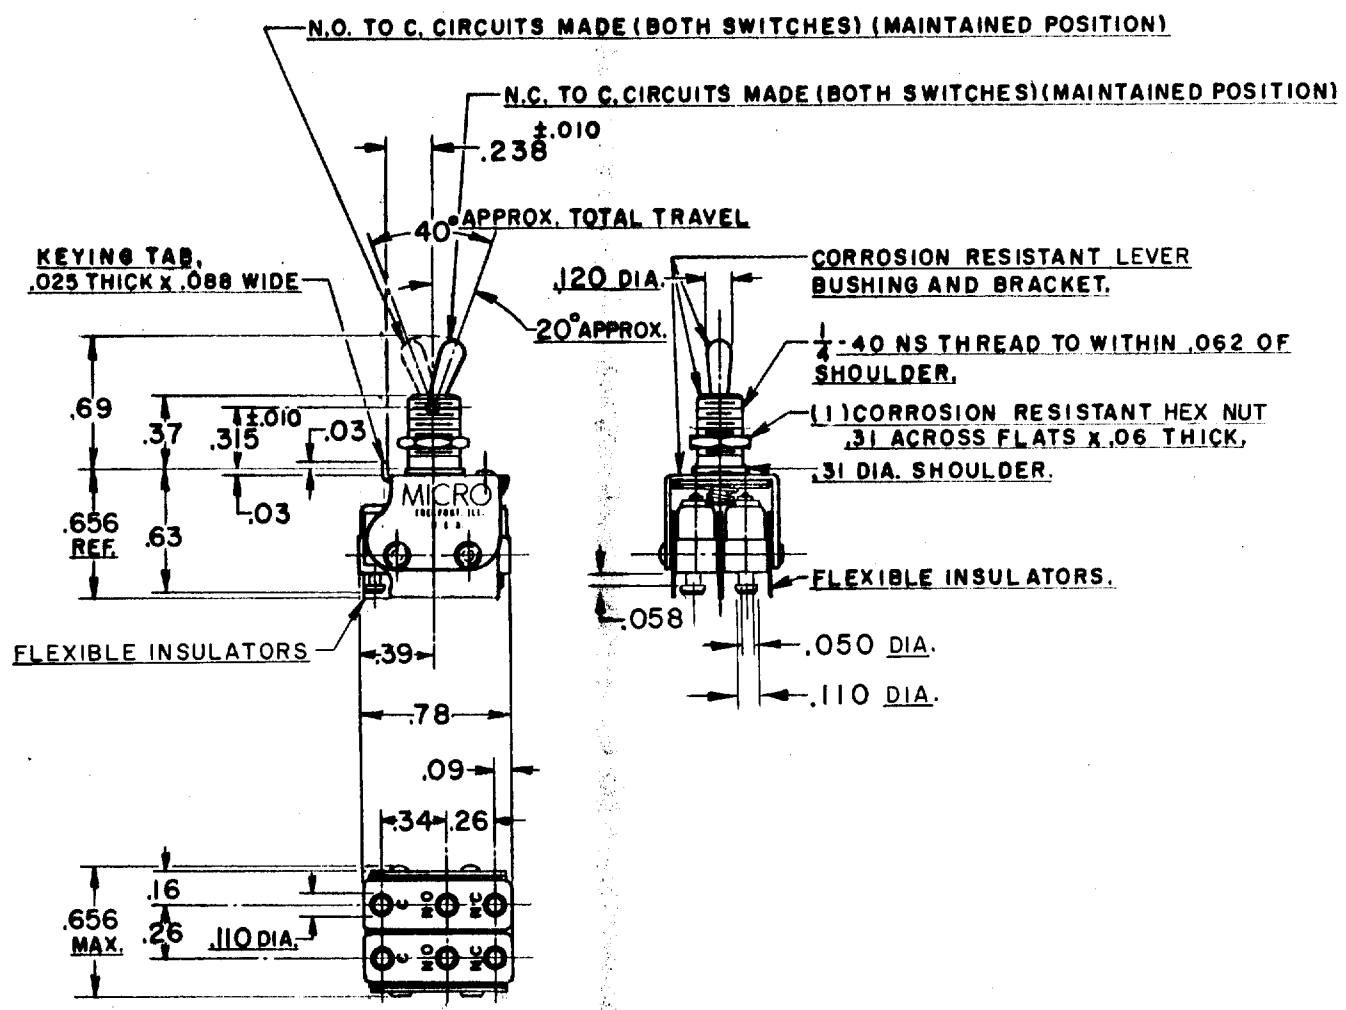

NOTE-
1-UNIT INCLUDES (2) CAT. LIST. 11SMI-T BASIC SWITCH
2-TERMINALS ARE PLATED FOR SOLDERING.
3-SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS		ELECTRICAL DATA		SCALE FULL	
		CONTACT ARRANGEMENT*	BREAK DISTANCE	DO NOT SCALE PRINT	
		(2) S P D T	.010 MIN		
		250 VAC —————	5 AMP	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±	
		30 VOLTS DC RATING			
		INDUCTIVE —————	SEA LEVEL — 3 AMP		
		50,000 FT. — 2.5 AMP			
		RESISTIVE —————	SEA LEVEL — 5 AMP		
		50,000 FT. — 5 AMP			
		MAXIMUM INRUSH —————	24 AMP	WEIGHT .03 LB	