

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING
BZE6-2RN183

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

BZE6-2RN183

M

DRAWING
NUMBER

11

ISSUE

REPLACES

PR-4878

29AUG07

PSR

CHECK

24AUG06

DVM

CHECK

30 MAY 85

TSK

4 SEP 92

CO-77779A

K D R

17 FEB 94

G 0017057

VKR

22 NOV 05

REVISIONS


A	CO48877	R J H	12 JAN 82
B	CO53191	TSK	16 FEB 84
C	CO55989	J A P	8 NOV 84
D	CO54958	TSK	30 MAY 85
E	CO72476	TSK	4 SEP 92
F	CO-77779A	K D R	17 FEB 94
G	0017057	VKR	22 NOV 05
H	0023923	RKP	24AUG06
J	0025947	KNS	30OCT06
K	0033014	BS	29AUG07

MASTER
FO-52551

DRAWN

K P K2

APR 75

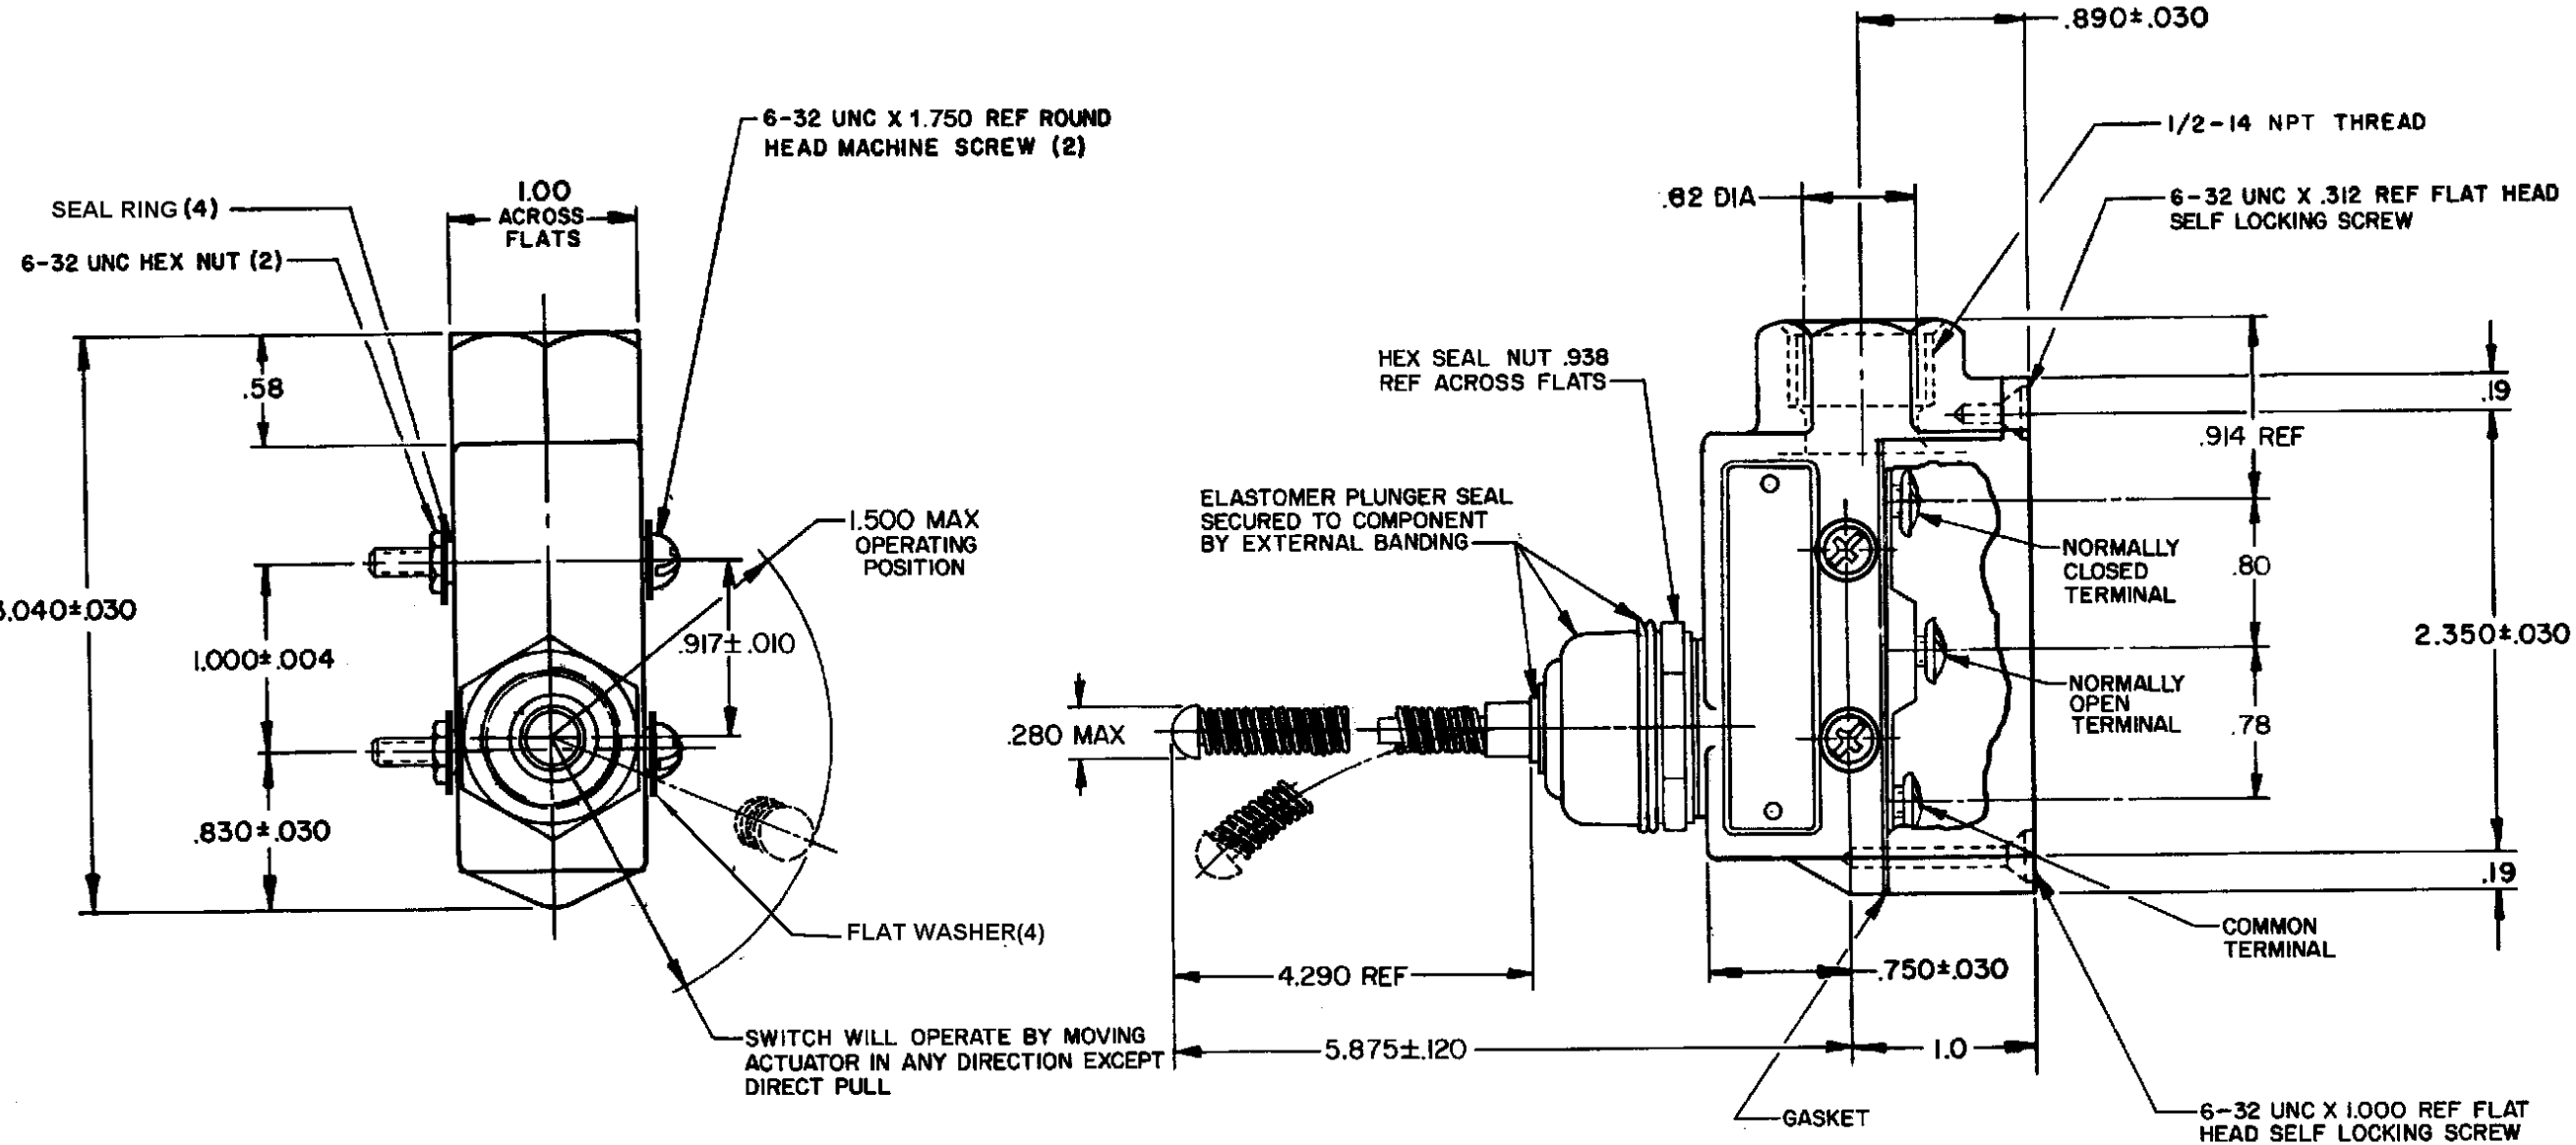

NOTE --

- 1 - 6-32 UNC X .219 REF TERMINAL SCREW AND CUPWASHER (3)
- 2 - SEAL RATING: NEMA 1,3,4
IP66

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE-----7 OZ MAX	CONTACT ARRANGEMENT	DO NOT SCALE PRINT
OPERATING POSITION-----18° MAX	S P D T	UNLESS OTHERWISE NOTED
SWITCH-BASIC REPLACEMENT-----BZ-2R-A2	15A-125, 250 OR 480 VAC, 2A-600 VAC 1/8HP-125 VAC; 1/4HP-250 VAC CODE L74 1/2A-125 VDC; 1/4A-250 VDC	DIMENSIONS ARE IN INCHES
	CE 1.5A, 240 Vac	TOLERANCES ARE:
		ONE PLACE 1.01 ±.030
		TWO PLACE 1.001 ±.015
		THREE PLACE 1.0001 ±.005
		ANGLES
		WEIGHT