


MICRO SWITCH
a Honeywell Division

SWITCH — ENCLOSED

CATALOG LISTING
BZE6-RNX17

FED. MFG. CODE 91929

CATALOG LISTING
BZE6-RNX17
PAGE 1 OF 1
ISSUE **M** 5
PSR 29AUG07
CHECK 24AUG06
DVM 23NOV05
BP 20 FEB 97
JAK
RELEASE NO. PR-22651
REPLACES
REVISIONS
A 0017057 VIKR 23NOV05
B 0023923 RKP 24AUG06
C 0025947 KML 27OCT06
D 0033014 BS 29AUG07
CHECK 23NOV05
BP 20 FEB 97
JAK
RASTER
DRAWN

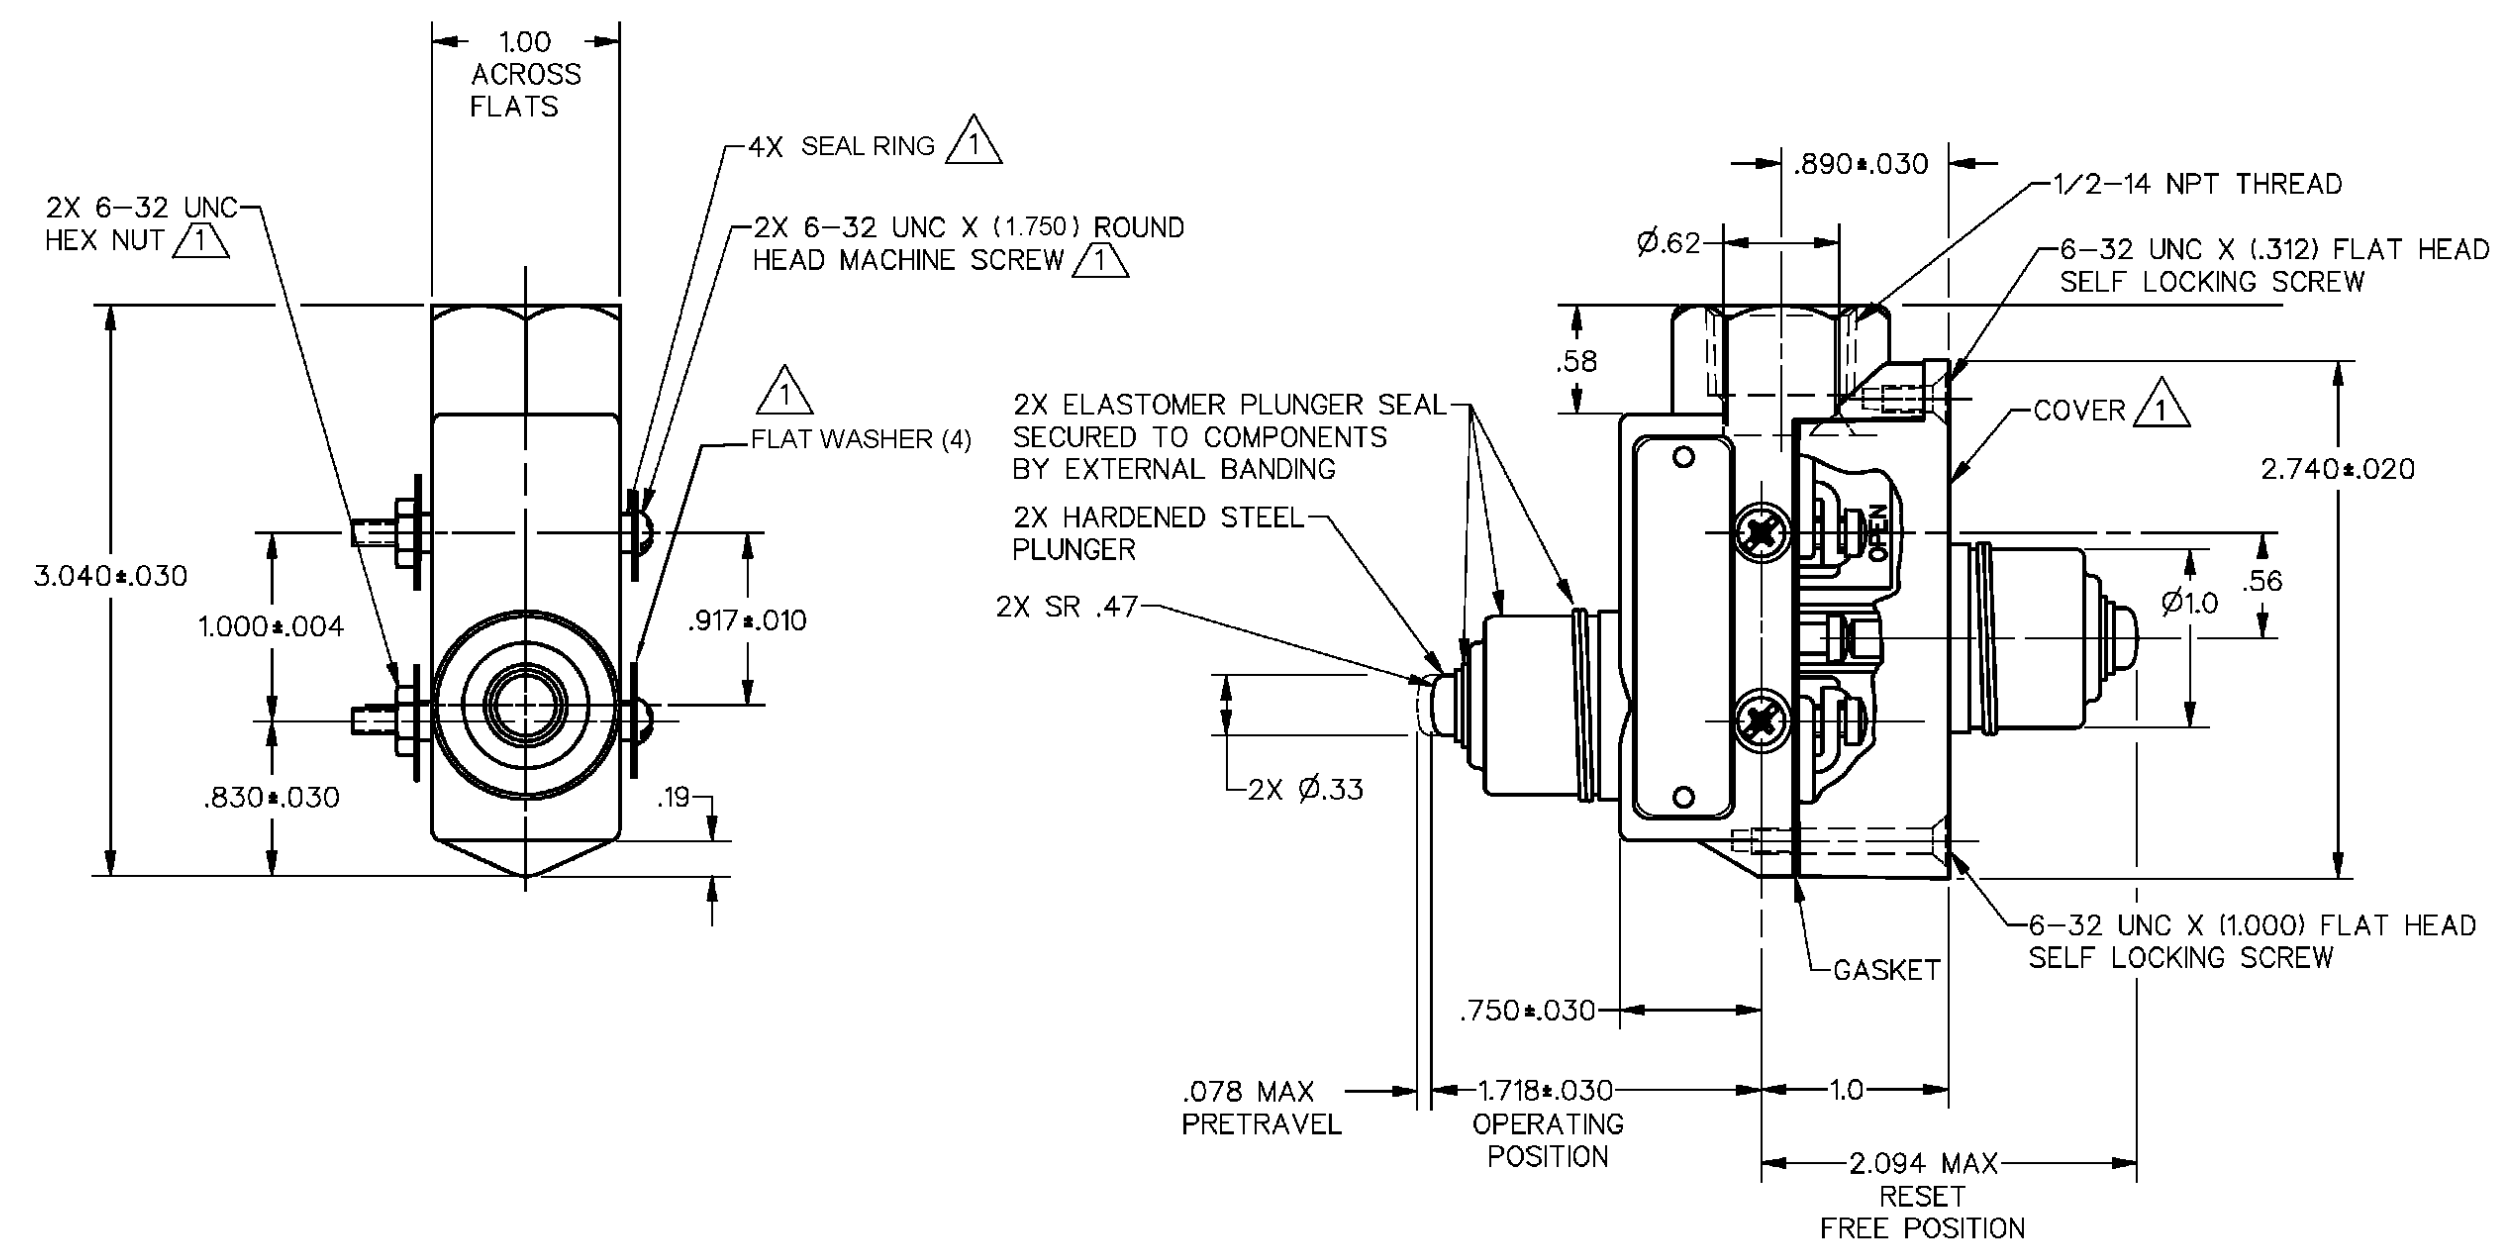

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CHARACTERISTICS	ELECTRICAL DATA
OPERATING FORCE ——— 28-68 OZ	CONTACT ARRANGEMENT
OVERTRAVEL ——— .187 MIN	S P D T MAINTAINED CONTACT
RESET CHARACTERISTICS	L67 15A-125, 250 OR 480 VAC
OPERATING FORCE ——— 6 OZ MIN	1/4 HP-125 VAC; 1/2 HP-250 VAC
BASIC SWITCH REPLACEMENT --- BZ-RNX783	1/2A-125 VDC; 1/4A-250 VDC



THIRD ANGLE PROJECTION
SCALE FULL
DO NOT SCALE PRINT
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
ONE PLACE (.0) ± .030
TWO PLACE (.00) ± .015
THREE PLACE (.000) ± .005
ANGLES ±
WEIGHT .70 LB

NOTE
1 FURNISHED UNASSEMBLED
2 - 3X 3-48 UNC X (.140) ROUND HEAD TERMINAL SCREW
3 - SEAL RATING: NEMA1,3,4
IP66

ANSI Y14.5M-1982 APPLIES