

DO NOT
SCALE PRINT

Honeywell

SWITCH - BASIC

CATALOGUE LISTING

V5B010CB3C

V5B010CB3C

REPLACES

M

DRAWING
NUMBER

MS-11586


2

ISSUE

REVISIONS

2 16.1.95


CNI5758

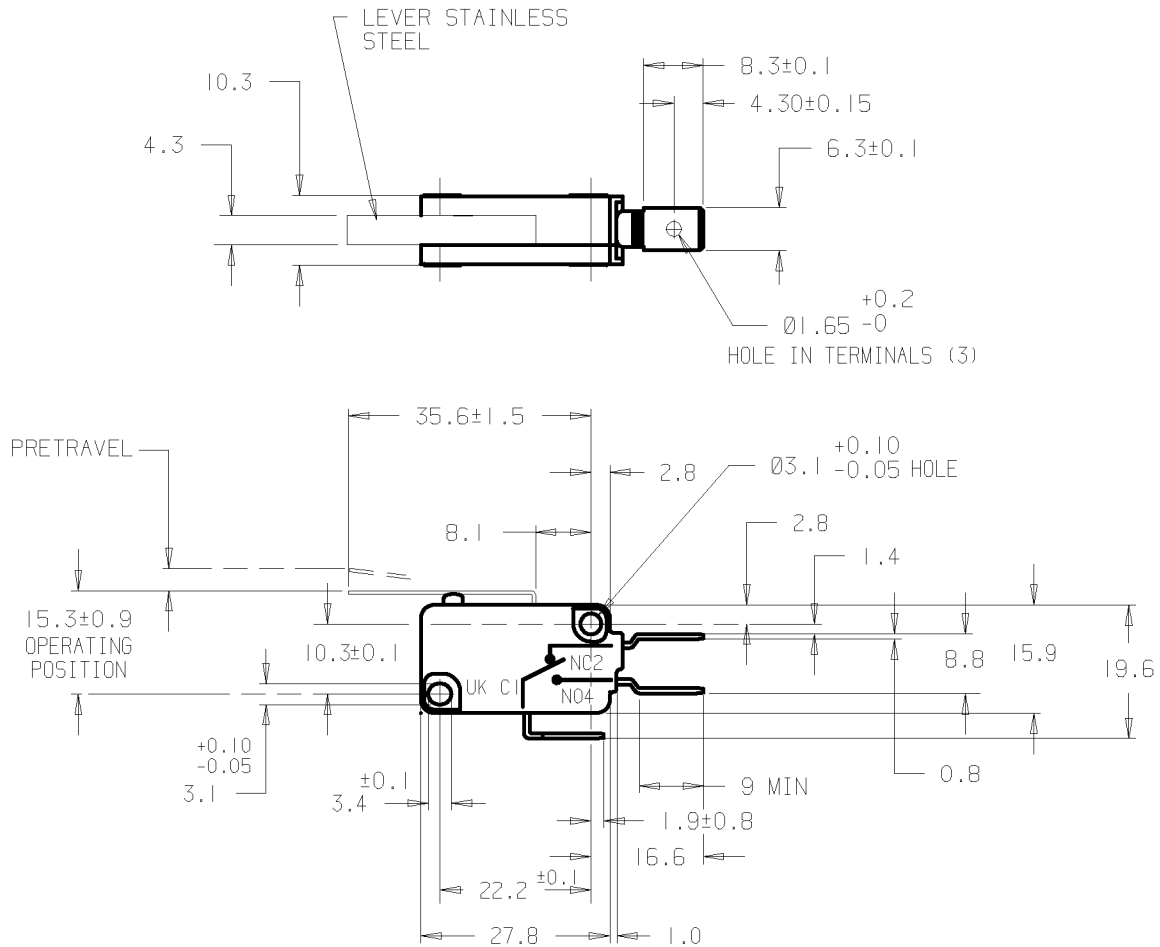

NOTES:-

1. MOUNTING HOLES WILL ACCEPT Ø3 MAX PINS OR SCREWS.
2. TERMINALS WILL ACCEPT 6.3 WIDE QUICK CONNECT RECEPTACLES AND COMPLY WITH BS3955 AND DIN46244 REQUIREMENTS.
3. SWITCHES ARE APPROVED BY SEV AT 16(4)A 250VAC.
4. THERMOPLASTIC CASE, COVER AND PHENOLIC PLUNGER.
5. APPROVED BY UL AT 0.6A 125VDC, 0.3A 250VDC.

THE COPYRIGHT OF THIS DRAWING IS THE PROPERTY OF HONEYWELL LTD.
THE DRAWING IS SUPPLIED IN CONFIDENCE AND MUST NOT BE USED FOR
ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS SUPPLIED.

THIRD ANGLE
PROJECTION

CHARACTERISTICS

OPERATING FORCE _____ 180g MAX
DIFFERENTIAL FORCE _____
RELEASE FORCE _____ 30g MIN
FREE POSITION _____
PRETRAVEL _____ 3.2 MAX
DIFFERENTIAL TRAVEL _____ 0.75 MAX
OVERTRAVEL _____ 1.2 MIN
FULL OVERTRAVEL FORCE _____

ELECTRICAL DATA

CONTACT ARRANGEMENT _____
S.P.D.T. _____

BREAK DISTANCE _____

SCALE :- FULL SIZE

DIMENSIONS ARE IN
MILLIMETRESTOLERANCES UNLESS
OTHERWISE STATED

±0.4

ANGULAR ±

MODIFY ON CAD3D
SYSTEM ONLY