
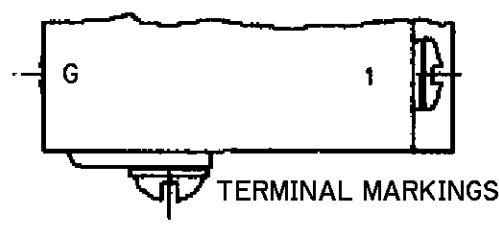


MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

SWITCH - ENCLOSED


CATALOG LISTING
JS-555
M8805/55-005

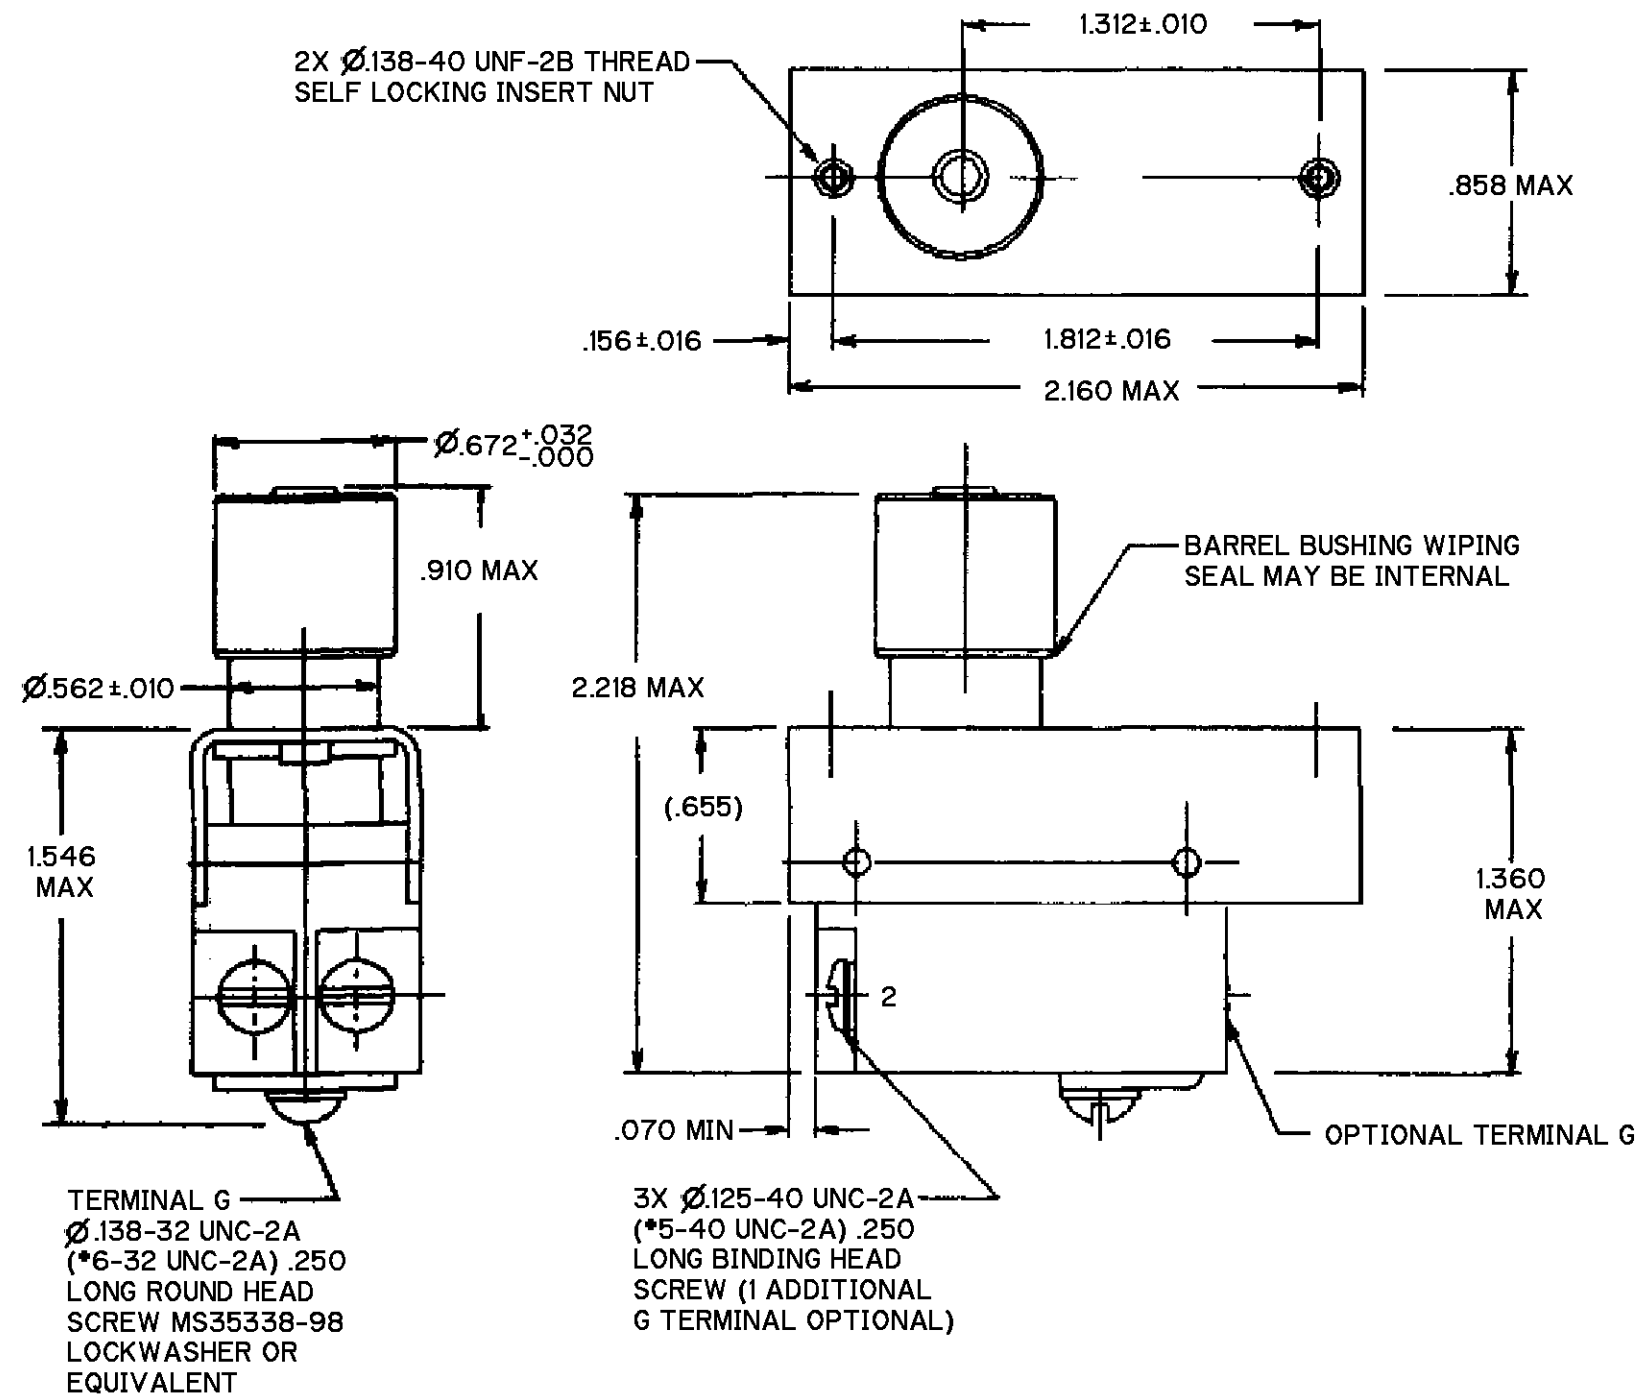

- NOTES
- 1 - SWITCH SEALED PER MIL-PRF-8805, SYMBOL 3
 - 2 - TERMINAL HARDWARE PACKET FURNISHED UNASSEMBLED:
15PA308-JS INCLUDES BUSS BRACKET AND TERMINAL SCREWS
 - 3 - MICRO SWITCH, MANUFACTURER'S CAGE CODE, CATALOG LISTING,
MILITARY PART NUMBER AND DATE CODE IDENTIFIED ON SIDE OF SWITCH
 - 4 - OPERATING TEMPERATURE RANGE: -40°C TO +85°C

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH				
CHARACTERISTICS		ELECTRICAL DATA		
ACTUATING FORCE - - - - - 7 - 11 LBS		CONTACT ARRANGEMENT		
FULL OVERTRAVEL FORCE- - - - - 20 LBS MAX		D P S T - N O		
RELEASE FORCE - - - - - .5 LB MIN		28 VDC		
PRETRAVEL - - - - - .090 MIN		RATED LOAD OVERLOAD		
DIFFERENTIAL TRAVEL- - - - - .050 MIN		INDUCTIVE	.75	
OVERTRAVEL - - - - - .050 MIN				1.75
TOTAL TRAVEL - - - - - .165 MIN				

THIRD ANGLE PROJECTION	
SCALE	NONE
DO NOT SCALE PRINT	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
ONE PLACE	(.0) ±.030
TWO PLACE	(.00) ±.015
THREE PLACE	(.000) ±.005
ANGLES	±
WEIGHT	.25 LB MAX



ANSI Y14.5M-1982 APPLIES