





| REV | DOCUMENT | CHANGED BY | CHECK |
|-----|----------|------------|-------|
| 1   | 206576   | GLH 4OCT02 | SAV   |

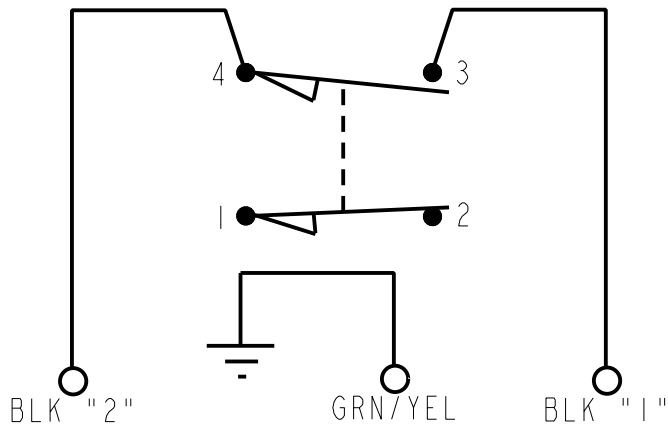

| CHARACTERISTICS                      | ELECTRICAL DATA     |
|--------------------------------------|---------------------|
| OPERATING TORQUE----- 4 IN LBS MAX   | CONTACT ARRANGEMENT |
| FULL TRAVEL TORQUE----- 4 IN LBS MAX | SPDT                |
| PRETRAVEL ----- 5° MAX               |                     |
| TOTAL TRAVEL----- (75°)              |                     |
| DIFFERENTIAL TRAVEL----- 5° MAX      |                     |
| OVERTRAVEL----- 70° MIN              |                     |

NOTES:

- 1 - RITE HITE PART NUMBER 0112433
- 2 - SWITCH USES FLUOROSILICONE SEALS FOR USE IN OPERATING TEMPERATURES OF -40°F TO 250°F
- 3 - OPERATING HEAD FACTORY SET FOR COUNTER CLOCKWISE OPERATION ONLY
- 4 - THREE 18 AWG, PVC INSULATED CONDUCTORS WITH PVC OIL RESISTANT JACKET (OLFLEX-190)
- 5 - CABLE EPOXY SEALED IN HOUSING

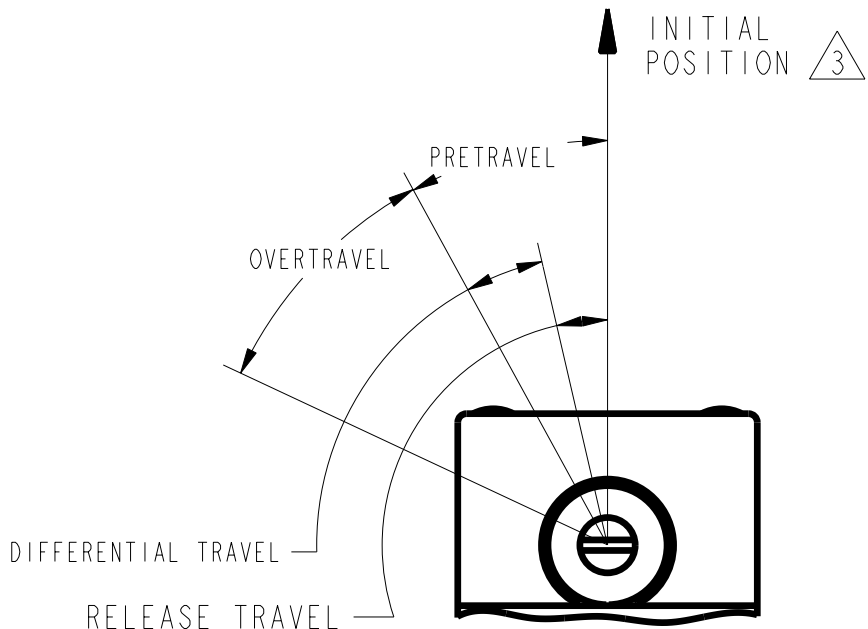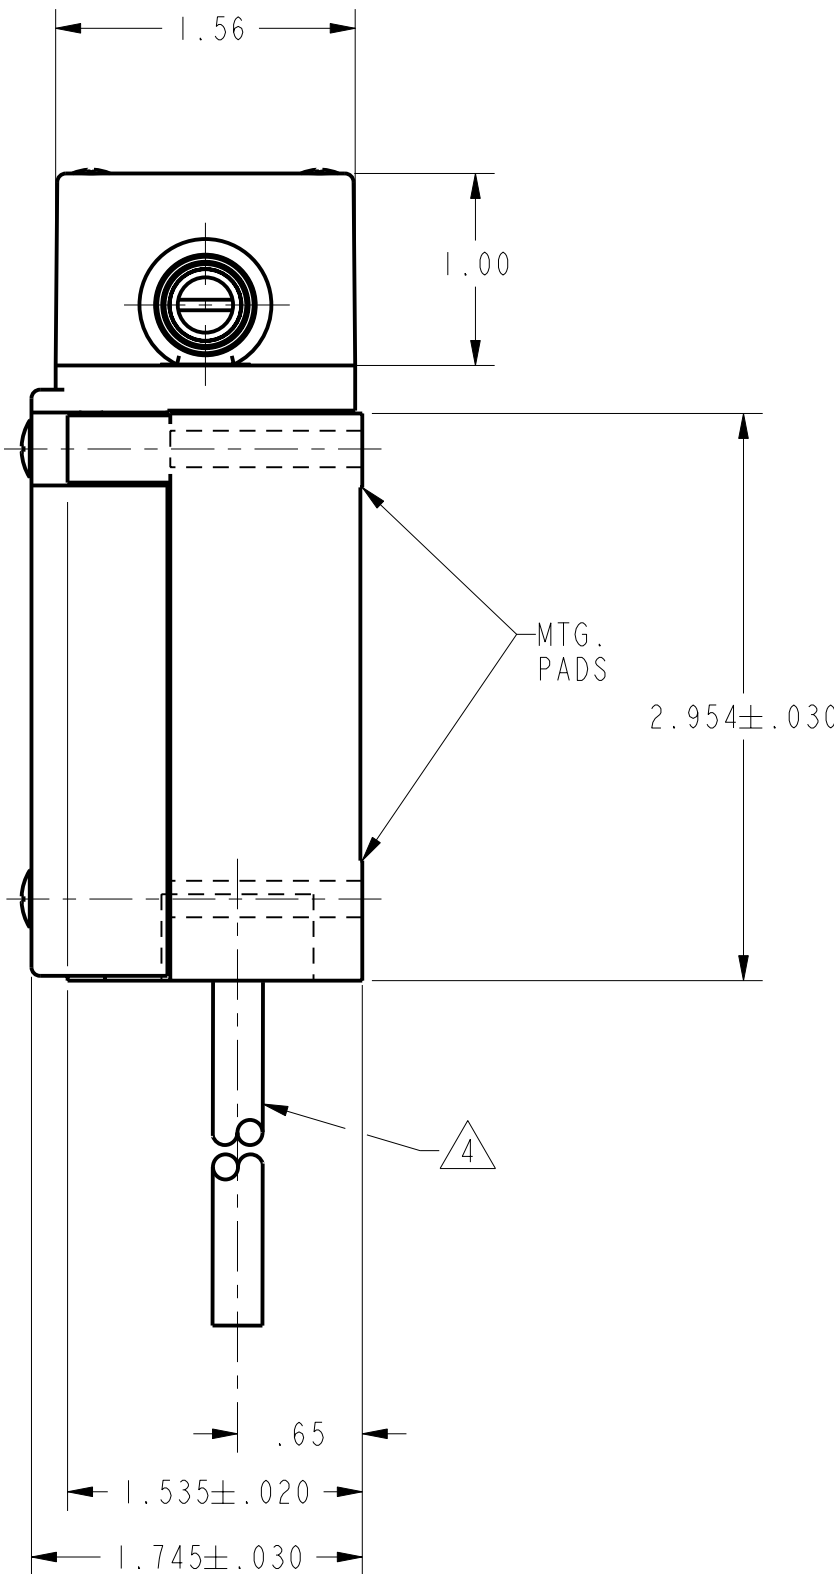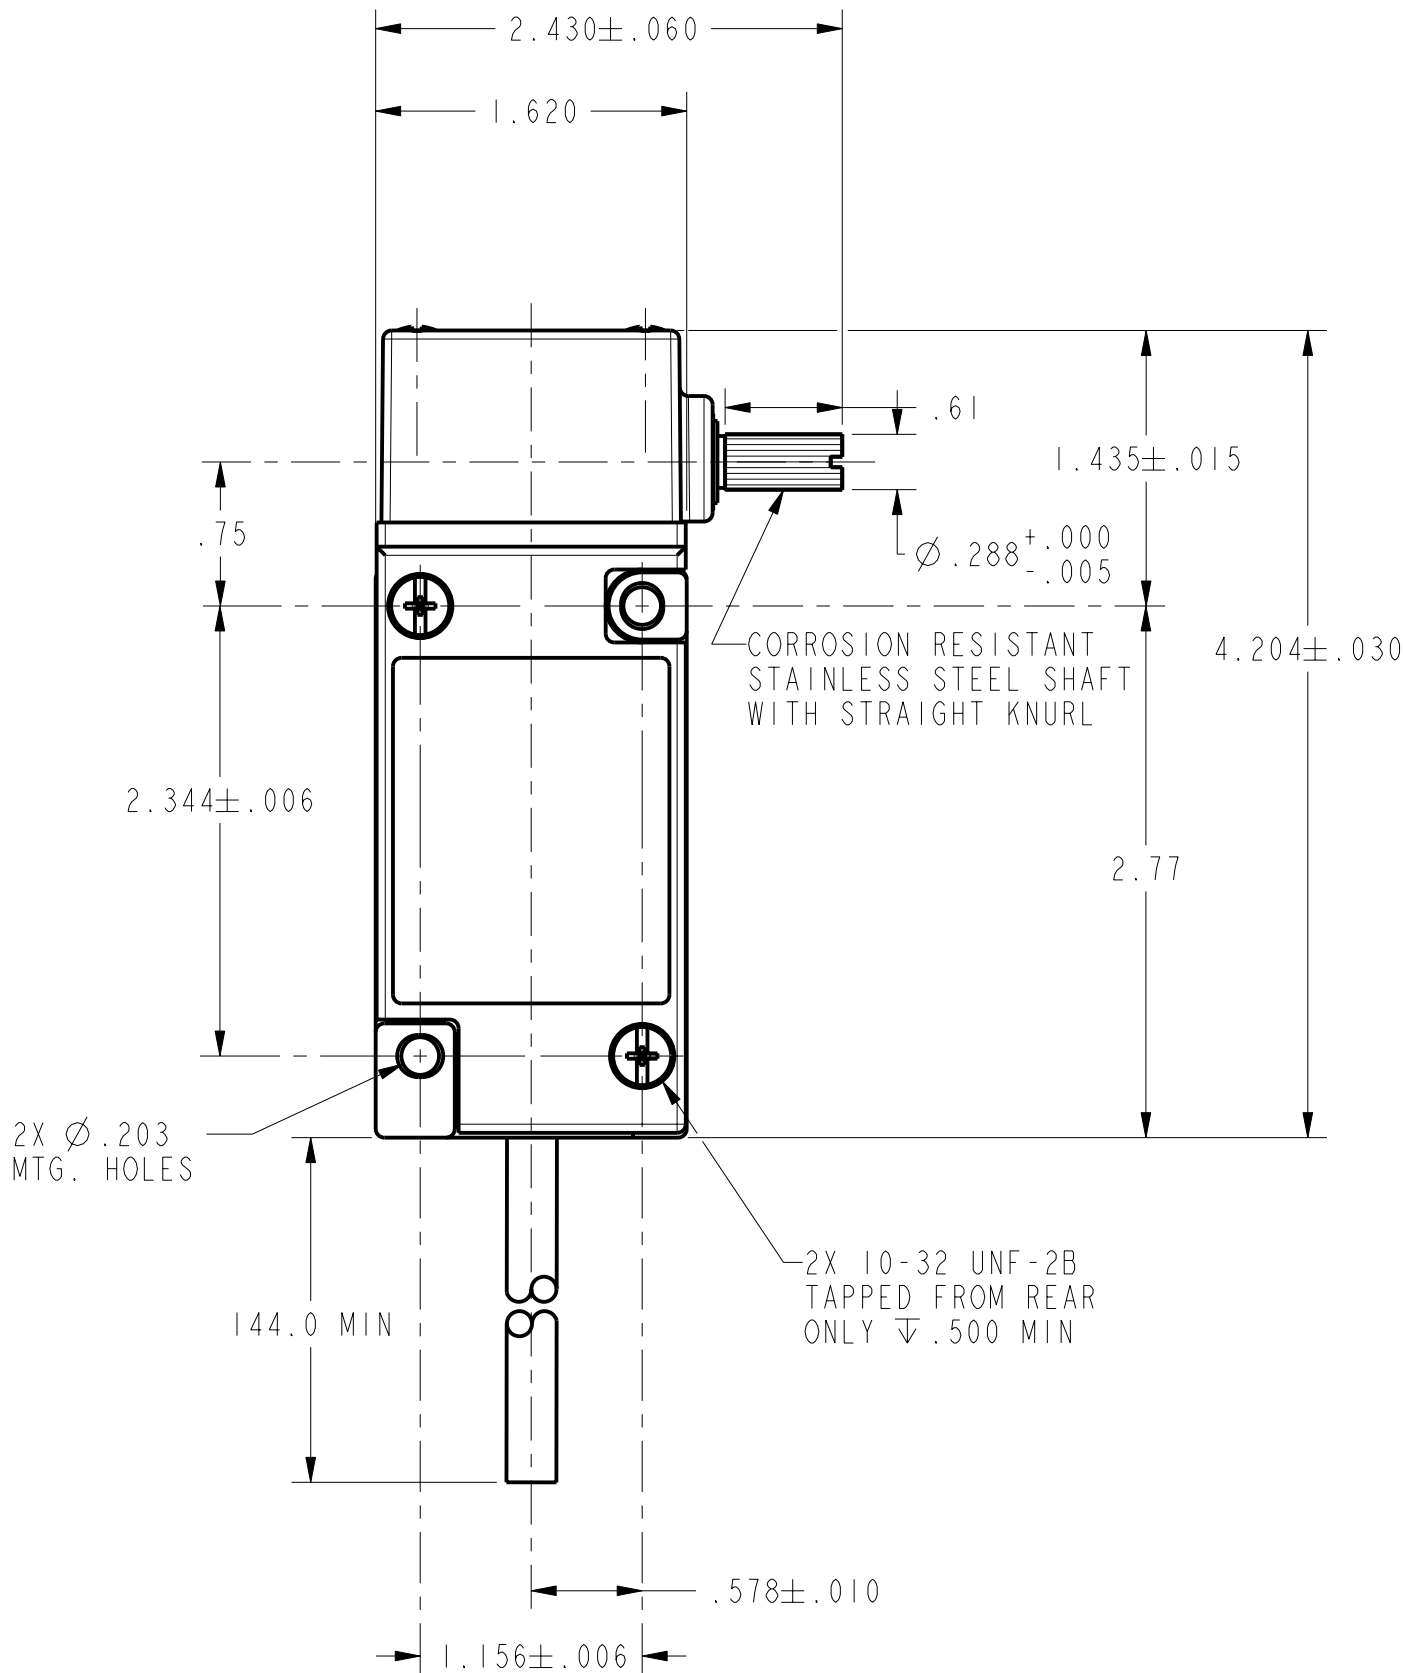

|                                                                                                                                                                                                       |  |  |                                                                                                                                                        |     |         |                                  |                      |                                    |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--------------------------------------------------------------------------------------------------------------------------------------------------------|-----|---------|----------------------------------|----------------------|------------------------------------|
| UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:<br>NO PLACE X ±.040 ±1<br>ONE PLACE .X ±.030 ±0,4<br>TWO PLACE .XX ±.015 ±0,15<br>THREE PLACE .XXX ±.005 ±<br>ANGLES ±<br>RAW MATERIAL-COMMERCIAL STANDARD |  |  | DRAWN                                                                                                                                                  | GLH | 27SEP02 | <b>Honeywell</b>                 |                      |                                    |
| SPECIFIED TOLERANCES ARE:<br>NO PLACE X ±.040 ±1<br>ONE PLACE .X ±.030 ±0,4<br>TWO PLACE .XX ±.015 ±0,15<br>THREE PLACE .XXX ±.005 ±<br>ANGLES ±<br>RAW MATERIAL-COMMERCIAL STANDARD                  |  |  | CHECK                                                                                                                                                  | SAV | 27SEP02 |                                  |                      |                                    |
| THIRD ANGLE PROJECTION                                                                                                                                                                                |  |  | THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL. |     |         | TITLE<br><b>SWITCH, ENCLOSED</b> |                      |                                    |
| 3D PTC                                                                                                                                                                                                |  |  | ASME Y14.5M-1994                                                                                                                                       |     |         | SIZE<br><b>C</b>                 | DWG TYPE<br><b>I</b> | DRAWING NAME<br><b>LSQYUB1A334</b> |
|                                                                                                                                                                                                       |  |  |                                                                                                                                                        |     |         | SCALE<br><b>FULL</b>             | WEIGHT<br><b>-</b>   | SHEET<br><b>1 OF 1</b>             |