
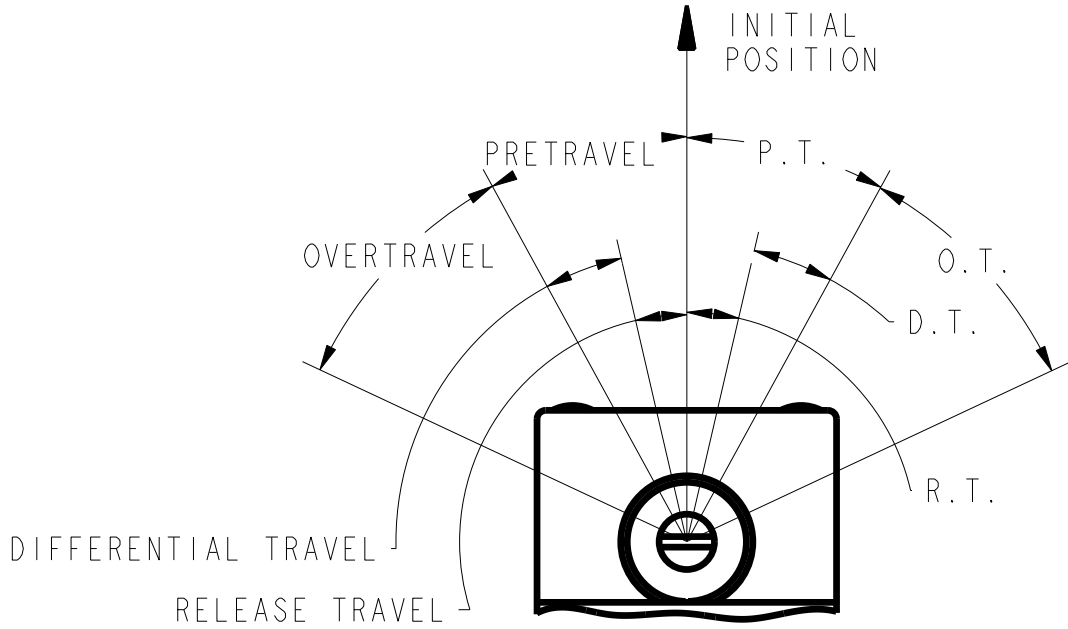
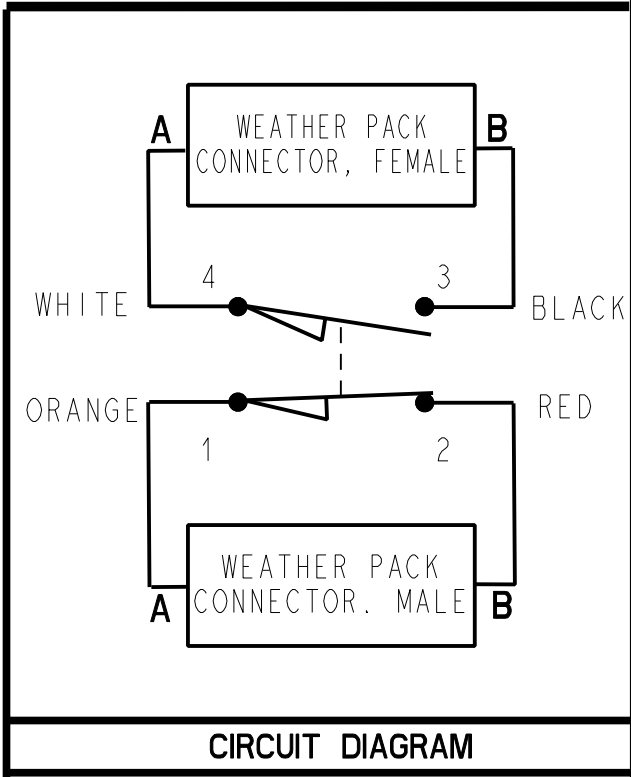
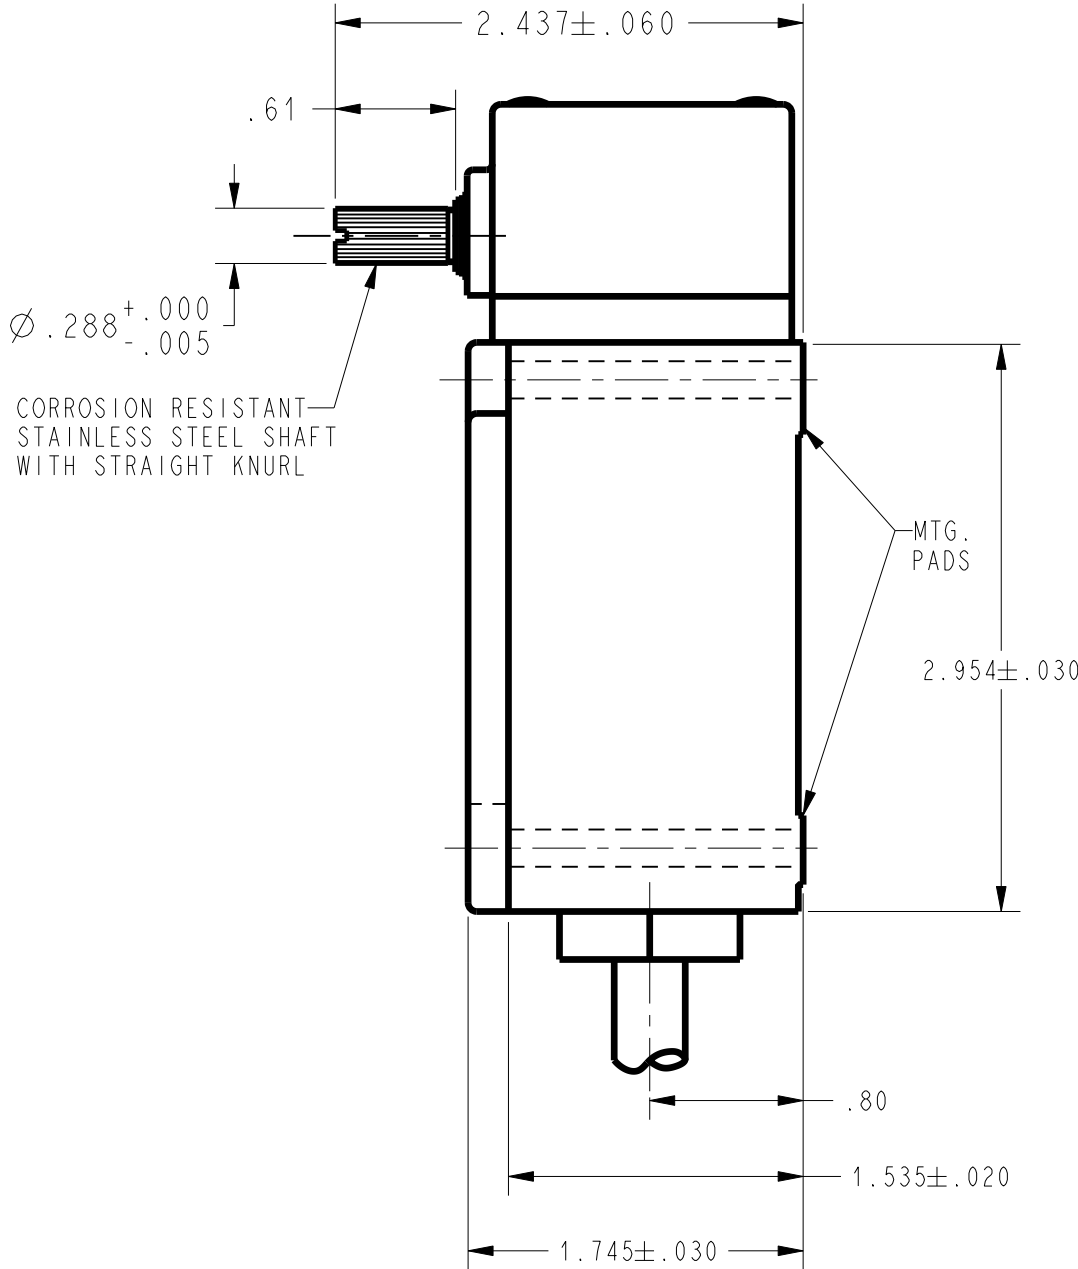


REV	DOCUMENT	CHANGED BY	CHECK
A	0005622	RJ 25MAY04	AK

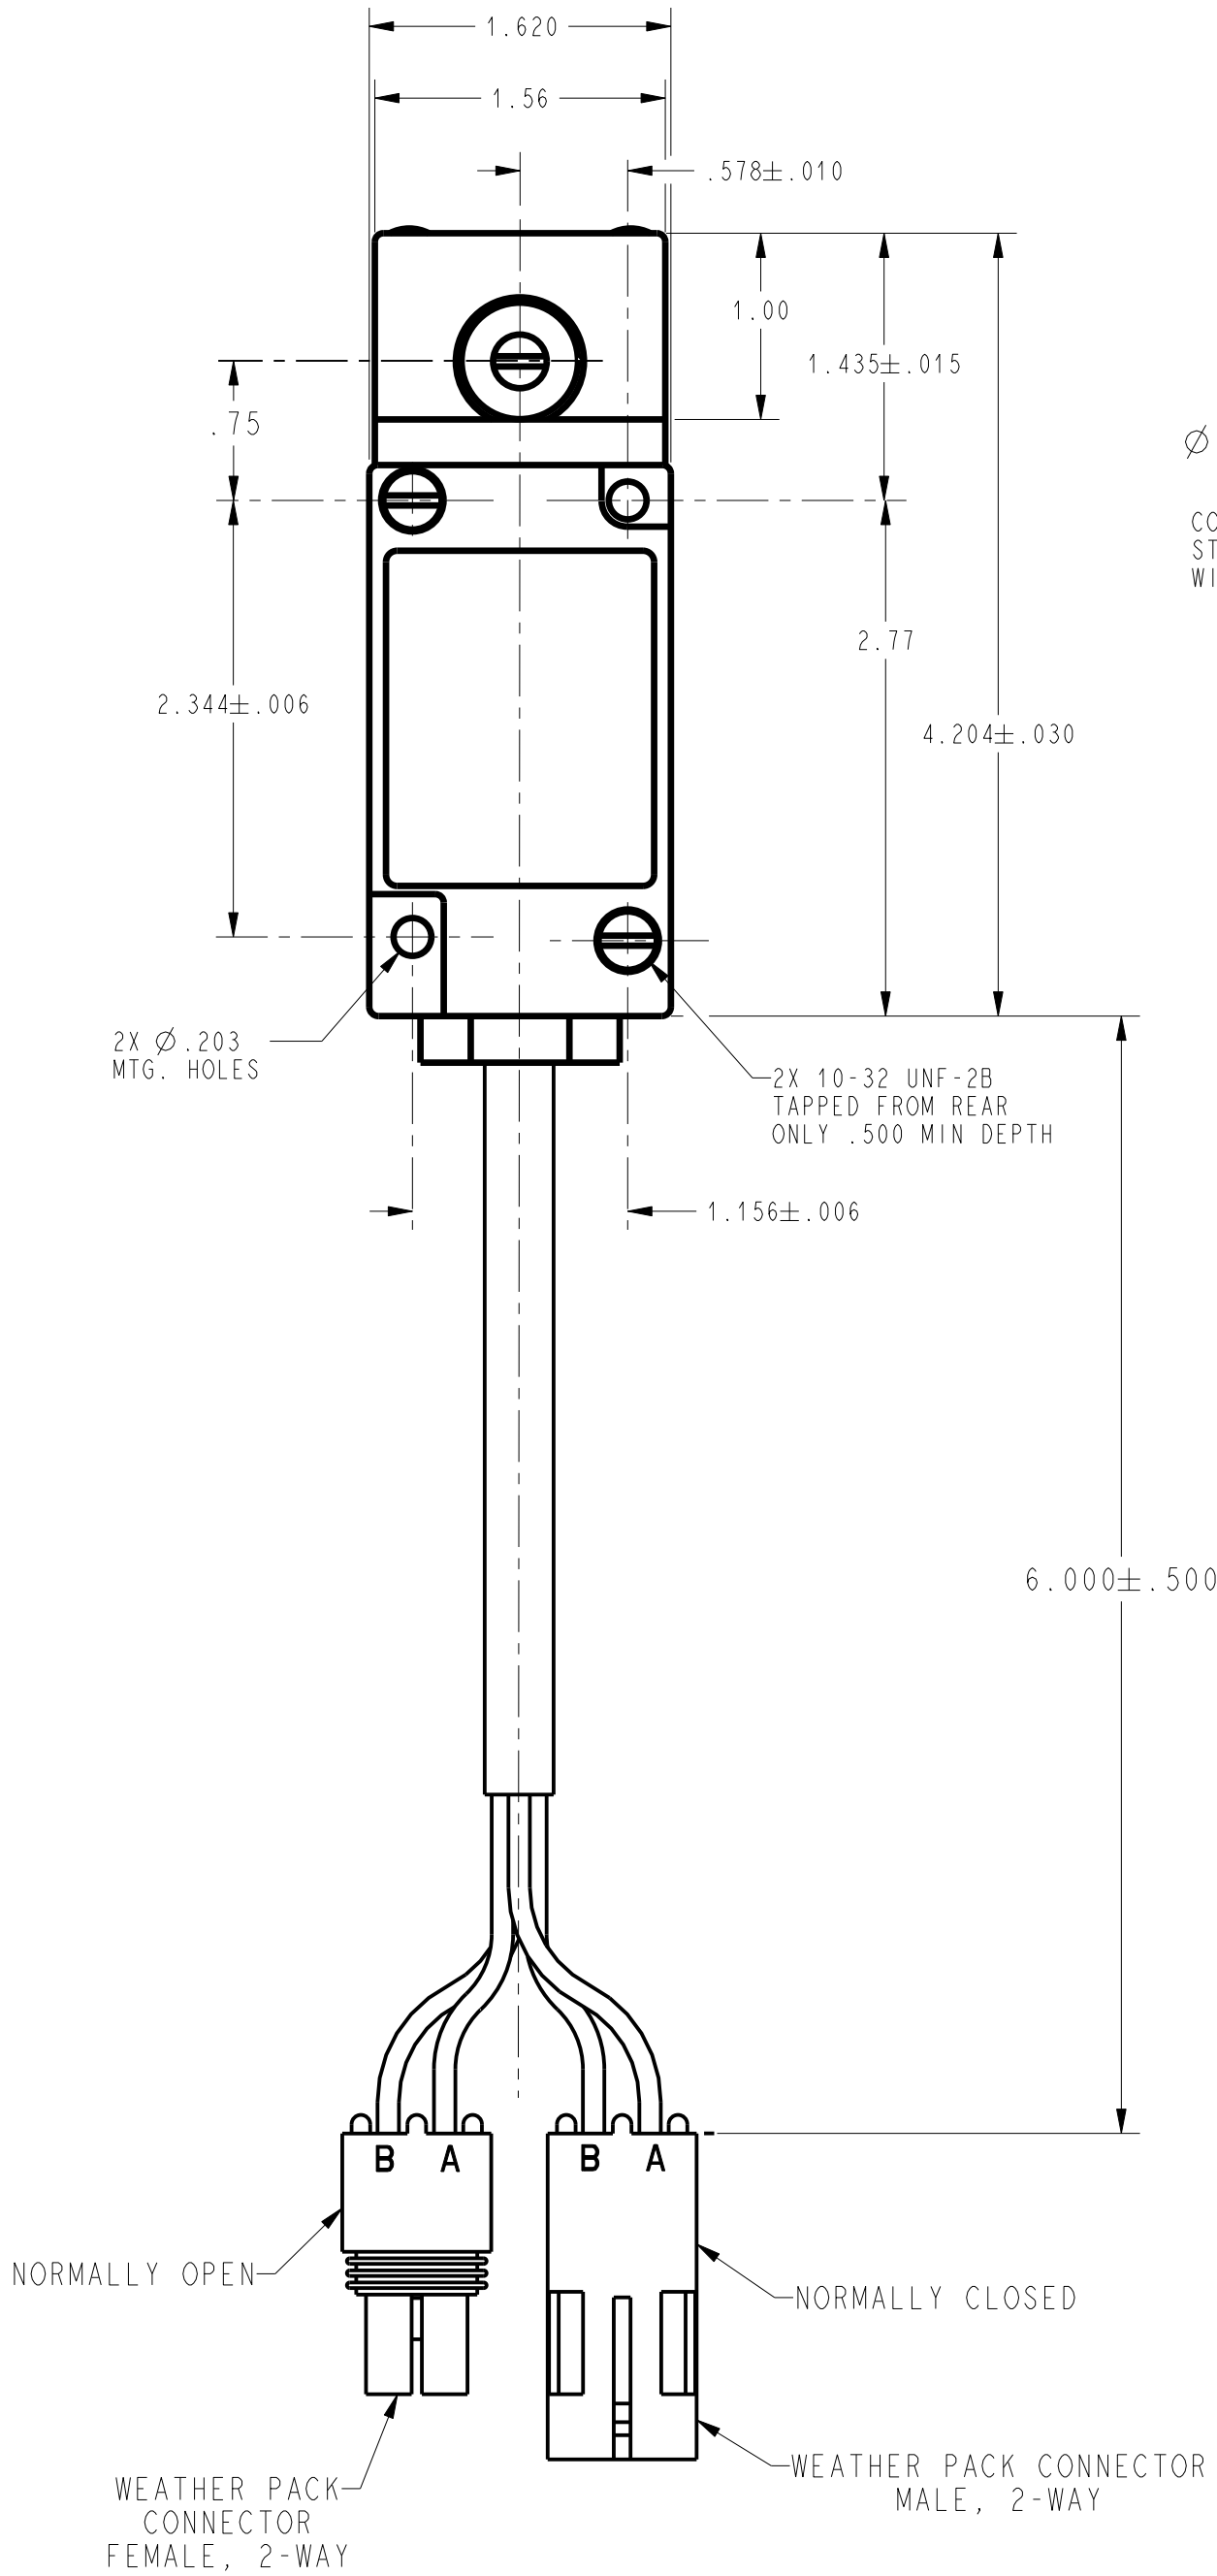

NOTES
1 - SWITCH USES FLUROSILICONE SEALS IN OPERATING HEAD ONLY
2 - SWITCH CAVITY EPOXY FILLED

CHARACTERISTICS	CONTACT ARRANGEMENT S P D T		
	VOLTS	AMPS RESISTIVE	AMPS INDUCTIVE
OPERATING TORQUE ----- 4 IN LBS MAX	125 VDC	2.0	1.0
FULL TRAVEL TORQUE ----- 4 IN LBS MAX	250 VDC	0.7	0.4
PRETRAVEL ----- 5° MAX	120 VAC	20.0	20.0
TOTAL TRAVEL ----- 75° REF	240 VAC	15.0	15.0
DIFFERENTIAL TRAVEL ----- 5° MAX	480 VAC	10.0	10.0
OVERTRAVEL ----- 70° MIN	600 VAC	5.0	5.0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:		☒ US (inch) CUSTOMARY	☐ SI (mm) METRIC
NO PLACE	X	±.040	±1
ONE PLACE	.X	±.030	±0.4
TWO PLACE	.XX	±.015	±0.15
THREE PLACE	.XXX	±.005	±
ANGLES		±	±
RAW MATERIAL-COMMERCIAL STANDARD			
THIRD ANGLE PROJECTION			

DRAWN	R J	25MAY04	Honeywell			
CHECK	A K	25MAY04				
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE			
			SWITCH, ENCLOSED			
DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED			SIZE	DWG TYPE	DRAWING NAME	REV
			C	I	LSQYUB3K339	A
2D PTC	ASME Y14.5M-1994		SCALE FULL		WEIGHT	SHEET 1 OF 1