

HONEYWELL

See full Datasheet below...

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

BUY NOW

 **MASTER**TM
E L E C T R O N I C S

BUY NOW


masterelectronics.com & onlinecomponents.com
are **authorized** e-commerce distributors
of electronic components.

SD3421/5421

Silicon PIN Photodiode

FEATURES

- TO-46 metal can package
- Choice of flat window or lensed package
- 90° or 18° (nominal) acceptance angle option
- Fast response time
- Wide operating temperature range (-55°C to +125°C)
- Mechanically and spectrally matched to SE3450/5450, SE3455/5455 and SE3470/5470 infrared emitting diodes

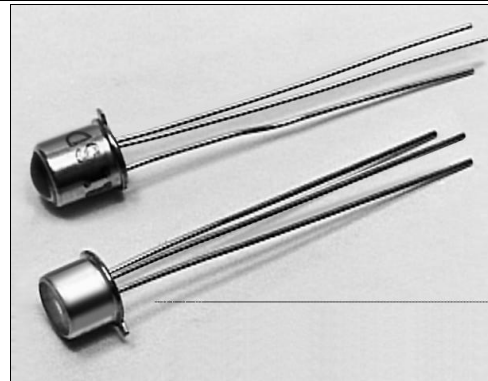

INFRA-57.TIF


DESCRIPTION

The SD3421/5421 series consists of PIN photodiodes mounted in a TO-46 metal can package. The SD3421 utilizes flat window cans providing a wide acceptance angle, while the SD5421 employs glass lensed cans providing a narrow acceptance angle. The TO-46 packages are ideally suited for operation in hostile environments.

OUTLINE DIMENSIONS in inches (mm)


Tolerance	3 plc decimals	±0.005(0.12)
	2 plc decimals	±0.020(0.51)

SD3421

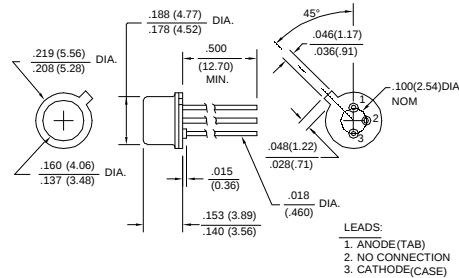

DIM_011.ds4

SD5421

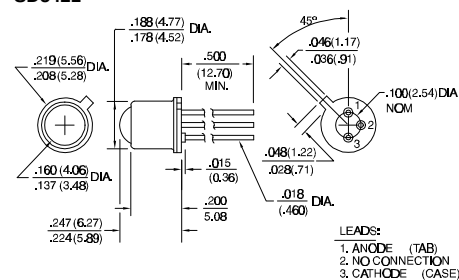

DIM_11b.cdr

SD3421/5421


Silicon PIN Photodiode

ELECTRICAL CHARACTERISTICS (25°C unless otherwise noted)						
PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Light Current SD3421-002 SD5421-002	I _L	10.0 40.0			μA	V _R =20 V H=5 mW/cm ² (1)
Dark Current	I _D			20	nA	V _R =20 V H=0
Reverse Breakdown Voltage	V _{BR}	75			V	I _R =10 μA
Angular Response (2) SD3421 SD5421	Ø		90 18		degr.	I _F =Constant
Rise And Fall Time	t _r , t _f		15		ns	V _R =20 V R _L =50 Ω

Notes
1. The radiation source is a tungsten lamp operating at a color temperature of 2870°K.
2. Angular response is defined as the total included angle between the half sensitivity points.

ABSOLUTE MAXIMUM RATINGS	
(25°C Free-Air Temperature unless otherwise noted)	
Cathode Anode Voltage	75 V
Power Dissipation	150 mW (1)
Operating Temperature Range	-55°C to 125°C
Storage Temperature Range	-65°C to 150°C
Soldering Temperature (10 sec)	260°C

Notes
1. Derate linearly from 25°C free-air temperature at the rate of 1.43 mW/°C.

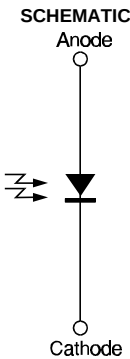

Honeywell reserves the right to make changes in order to improve design and supply the best products possible.

SD3421/5421

Silicon PIN Photodiode

SWITCHING TIME TEST CIRCUIT


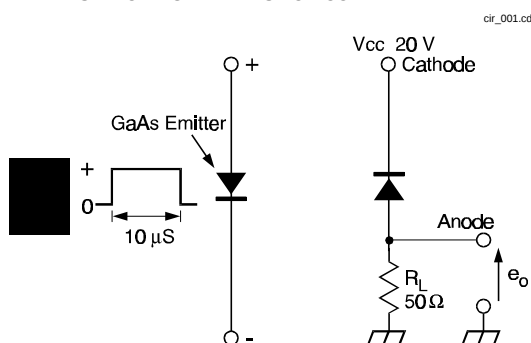


Fig. 1 Responsivity vs Angular Displacement (SD3421)

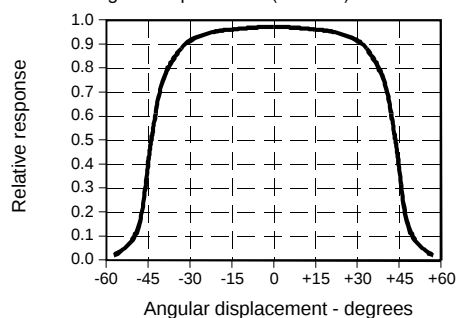

SWITCHING WAVEFORM

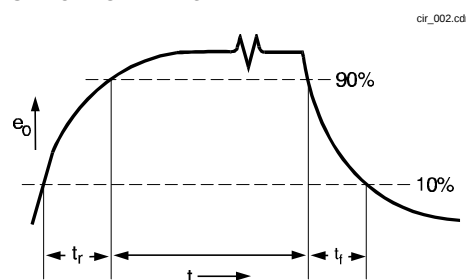


Fig. 2 Responsivity vs Angular Displacement (SD5421)

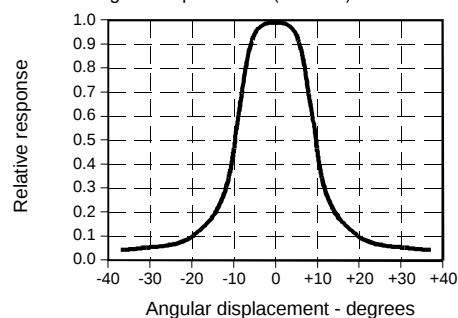


Fig. 3 Dark Current vs Temperature


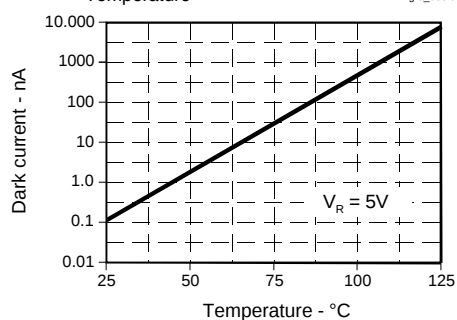


Fig. 4 Spectral Responsivity

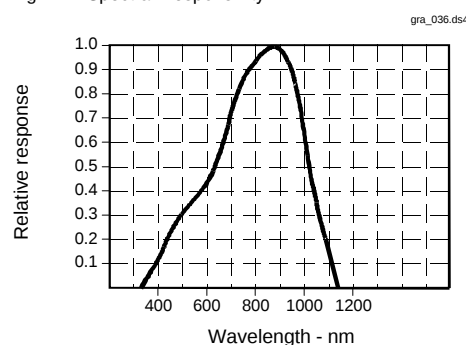

All Performance Curves Show Typical Values

SD3421/5421

Silicon PIN Photodiode



Honeywell reserves the right to make changes in order to improve design and supply the best products possible.

Honeywell