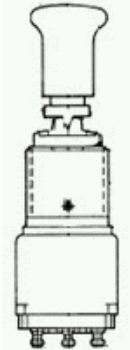




Home> Products > MICRO SWITCH™ Toggle Switches> TW> Product Page

12TW59-7N



Actual product appearance may vary.

TW Series Toggle Switch, 2 pole, 3 position, Solder terminal, Locking Lever

Features

- Save space and weight
- SPDT and DPDT circuitry
- Temperature range:-85° F to +160° F (-65° C to +71° C)
- Sealed bushing versions
- Choice of 1/8 in. or 15/32 in. bushing
- Color tab available on 15/32 in. bushing
- UL recognized

Potential Applications



- Industrial machinery and equipment
- Military and commercial aviation
- Construction equipment
- Test instruments
- Agricultural machinery
- Process control
- Medical instrumentation

Description

MICRO SWITCH™ miniature toggle switches in two bushing sizes. Molded in terminals are plated for soldering. Momentary and maintained circuitry closures available. Special on-on-on circuitries are also available. Pull-to-unlock levers prevent accidental operation.

Supporting Documentation

- [Accessory: Seals](#)
- [Accessory: Nuts](#)
- [Engineering Drawing](#)

Product Specifications		
Circuitry/Operating action	Keyway Momentary Position  123  123 Opposite Keyway Momentary Position  123  123  123  123	
Product Type	MICRO SWITCH™ Toggle Switch	
Lever Lock	 Locked out of extreme position (Opposite keyway)	
Ampere/Voltage Range (Resistive Load)	0.1 A to 5.0 A at 0.5 Vdc to 28 Vdc,0.1 A to 5.0 A at 0.5 Vac to 115 Vac	
Circuitry	DPDT	
Action	3 position	
Mounting	Bushing 15/32 in	
Termination	Solder	
Lever Type	Locking	
UL/CSA Rating Code	L117: 5 A at 125 Vac	
Comment	Shorter than standard mushroom lever	
Availability	Global	
UNSPSC Code	30211908	
UNSPSC Commodity	30211908 Toggle switches	
Series Name	TW	

My Links

- Login to iCOM
- Login as Rep/AD
- Login as Guest
- Login to Digital University

Keyword Search

Search for product and support information.

All Sensing and Control▼

Product Search

Part number search:

Use (*) to expand search

Specification Search