




Order Product and Get Support

- U.S. Authorized Distributors
- Global Sales & Service
- N. American Sales Reps
- Distributor Inventory
- Technical Assistance
- White Papers
- Literature Request
- Test and Measurement Catalog
- RoHS Product List
- Customer Feedback

14TL1-10A

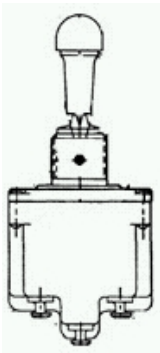

Actual product appearance may vary.

TL Series Toggle Switch, 4 pole, 3 position, Solder terminal, Locking Lever

Features

- Environmentproof sealing
- 1,2, and 4 pole circuitry
- Standard and pull-to-unlock levers
- 2 and 3 position, maintained and momentary toggle action
- Temperature range: -85° F to +160° F
- Completely sealed switching chamber
- Step-design case provides added space between terminals to help prevent shorting
- UL recognized, CSA certified
- CE approved

Potential Applications

- Industrial machinery and equipment
- Military and commercial aviation
- Construction equipment
- Test instruments
- Agricultural machinery
- Process control
- Medical instrumentation

Description

MICRO SWITCH™TL Series toggle switches have high strength, temperature resistant, non-tracking case material and silver cadmium oxide contacts. Pull-to-Unlock toggle levers prevent accidental operation; the lever must be pulled approx. 2,3 mm (0.09 inches) to change positions.

Supporting Documentation

- [Accessory: Seals](#)
- [Accessory: Nuts](#)

Product Specifications																															
Circuitry/Operating action	<table><tr><th>Keyway Position</th><th>Center Position</th><th>Opposite Keyway Position</th></tr><tr><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td></tr><tr><td>3 2 1</td><td>3 2 1</td><td>3 2 1</td></tr><tr><td>6 5 4</td><td>6 5 4</td><td>6 5 4</td></tr><tr><td>9 8 7</td><td>9 8 7</td><td>9 8 7</td></tr><tr><td>12 11 10</td><td>12 11 10</td><td>12 11 10</td></tr><tr><td>ON</td><td>OFF</td><td>ON</td></tr></table>	Keyway Position	Center Position	Opposite Keyway Position													3 2 1	3 2 1	3 2 1	6 5 4	6 5 4	6 5 4	9 8 7	9 8 7	9 8 7	12 11 10	12 11 10	12 11 10	ON	OFF	ON
Keyway Position	Center Position	Opposite Keyway Position																													
3 2 1	3 2 1	3 2 1																													
6 5 4	6 5 4	6 5 4																													
9 8 7	9 8 7	9 8 7																													
12 11 10	12 11 10	12 11 10																													
ON	OFF	ON																													
Product Type	MICRO SWITCH™ Toggle Switch																														
Lever Lock	 Locked in three position																														
Ampere/Voltage Range (Resistive Load)	0.75 A at 115 Vdc,0.5 A at 250 Vdc,0.5 A to 20 A at 0.5 Vdc to 28 Vdc,0.5 A to 15 A at 0.5 Vac to 277 Vac																														
Circuitry	4PDT																														
Action	3 position																														
Mounting	Bushing 15/32 in																														
Termination	Solder																														
Lever Type	Locking																														
UL/CSA Rating Code	L191: 15 A - 125, 250, 277 Vac; 1/2 Hp - 125 Vac; 1 Hp - 250, 277 Vac; 5 A - 120 Vac "L"																														
Comment	Single turret solder lug termination																														
Availability	Global																														
UNSPSC Code	30211908																														
UNSPSC Commodity	30211908 Toggle switches																														
Series Name	TL																														

Keyword Search

Search for product and support information.

All Sensing and Control

Product Search

Part number search:

Use (*) to expand search

Specification Search