




Home> Products > MICRO SWITCH™ Toggle Switches> NT > Product Page

Order Product and Get Support

- U.S. Authorized Distributors
- Global Sales & Service
- N. American Sales Reps
- Distributor Inventory
- Technical Assistance
- White Papers
- Literature Request
- Test and Measurement Catalog
- RoHS Product List
- Customer Feedback

1NT887-21K

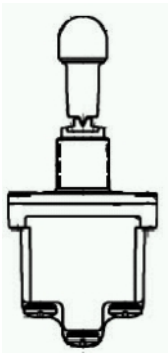

Actual product appearance may vary.

NT Series Toggle Switch, 1 pole, 3 position, Screw terminal, Locking Lever

Features

Completely sealed switching chamber
NEMA 3, 3R, 4, and 13
UL recognized, File E12252, Vol. 1, Section 44
CSA certified, File LR4442
CE approved

Potential Applications

Aerial lifts, scissor lifts, truck mounted tele-handlers, and cranes
Construction equipment
Agriculture equipment
Material-handling equipment
Factory-floor control units
Machine tool equipment manufacturers

Description

MICRO SWITCH™ NT Series toggle switches meet the need for a rugged, cost effective toggle switch. Quality construction features include a seal between the toggle lever and bushing, and between the cover and case. These switches can be used where panels are subject to splashes, hosedowns, or outdoor environments. The "Easy-Start" threaded bushing enables quick alignment of mounting nut to decrease the chance of cross threading. The panel stand-off with O-ring feature available on some listings, eliminates the need for behind-the-panel hardware, provides uniform panel height, and provides a panel to cover seal.

Supporting Documentation

- [Accessory: Seals](#)
- [Accessory: Nuts](#)
- [Engineering Drawing](#)

Product Specifications	
Circuitry/Operating action	Keyway Position 2 3 OFF Opposite Keyway Position 2 3 ON
Product Type	MICRO SWITCH™ Toggle Switch
Lever Lock	Locked in center and extreme position (Opposite keyway)
Ampere/Voltage Range (Resistive Load)	0.5 A at 250 Vdc,0.75 A at 115 Vdc,0.5 A to 15 A at 0.5 Vac to 277 Vac,0.5 A to 20 A at 0.5 Vdc to 28 Vdc
Circuitry	SPST
Action	3 position
Mounting	Bushing 15/32 in
Termination	Screw
Lever Type	Locking
UL/CSA Rating Code	L191: 15 A - 125, 250, 277 Vac; 1/2 Hp - 125 Vac; 1 Hp - 250, 277 Vac; 5 A - 120 Vac "L"
Comment	Gold Plated Contacts
Availability	Global
UNSPSC Code	30211908
UNSPSC Commodity	30211908 Toggle switches
Series Name	NT

My Links

- [Login to iCOM](#)
- [Login as Rep/AD](#)
- [Login as Guest](#)
- [Login to Digital University](#)

Keyword Search

Search for product and support information.

All Sensing and Control▼

Product Search

Part number search:

Use (*) to expand search

Specification Search