


Honeywell Sensing and Control

Home> Products > MICRO SWITCH™ Toggle Switches > TW > Product Page

Order Product and **Get Support**

- U.S. Authorized **Distributors**
- Global Sales & Service
- N. American Sales Reps
- Distributor Inventory
- Technical Assistance
- White Papers
- Literature Request
- Test and Measurement Catalog
- RoHS Product List
- Customer Feedback

1TW101-3



TW Series Toggle Switch, 1 pole, 2 position, Solder terminal, Standard Lever

Actual product appearance may vary.

Features

Save space and weight SPDT and DPDT circuitry Temperature range: -85? F to +160? F (-65? C to +71? C) Sealed bushing versions Choice of? in. or 15/32 in. bushing Color tab available on 15/32 in. bushing **UL** recognized

Potential Applications

Industrial machinery and equipment Military and commercial aviation Construction equipment Test instruments Agricultural machinery Process control Medical instrumentation

Description


MICRO SWITCH™ miniature toggle switches in two bushing sizes. Moldedin terminals are plated for soldering. Momentary and maintained circuitry closures available. Special on-on-on circuitries are also available. Pullto-unlock levers prevent accidental operation.

Supporting Documentation

Terminal Identification Engineering

Panel Cutout

Accessory: Nuts

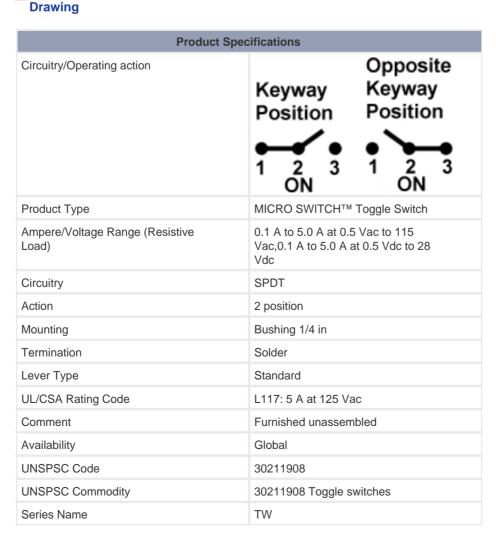



My Links

Login to iCOM Login as Rep/AD Login as Guest **Login to Digital** University

Keyword Search

Search for product and support information.

All Sensing and Contro

Product Search Part number search: Use (*) to expand search

Specification Search