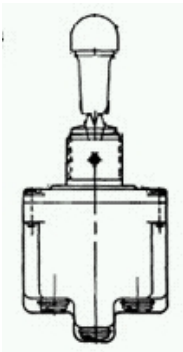




Home> Products > MICRO SWITCH™ Toggle Switches> TL > Product Page

2TL901-3F



Actual product appearance may vary.

TL Series Toggle Switch, 2 pole, 2 position, Quick Connect terminal, Locking Lever

Features

- Environmentproof sealing
- 1,2, and 4 pole circuitry
- Standard and pull-to-unlock levers
- 2 and 3 position, maintained and momentary toggle action
- Temperature range:-85° F to +160° F
- Completely sealed switching chamber
- Step-design case provides added space between terminals to help prevent shorting
- UL recognized, CSA certified
- CE approved

Description



MICRO SWITCH™TL Series toggle switches have high strength, temperature resistant, non-tracking case material and silver cadmium oxide contacts. Pull-to-Unlock toggle levers prevent accidental operation; the lever must be pulled approx. 2,3 mm (0.09 inches) to change positions.

Potential Applications

- Industrial machinery and equipment
- Military and commercial aviation
- Construction equipment
- Test instruments
- Agricultural machinery
- Process control
- Medical instrumentation

Supporting Documentation

-  [Accessory: Seals](#)
-  [Accessory: Nuts](#)
-  [Engineering Drawing](#)

Product Specifications	
Circuitry/Operating action	Keyway Position  Opposite Keyway Position    ON ON

Keyword Search

Search for product and support information.

All Sensing and Control

Product Search

Part number search:

Use (*) to expand search

Specification Search