




Home> Products > MICRO SWITCH™ Toggle Switches> NT> Product Page

Order Product and Get Support

- U.S. Authorized Distributors
- Global Sales & Service
- N. American Sales Reps
- Distributor Inventory
- Technical Assistance
- White Papers
- Literature Request
- Test and Measurement Catalog
- RoHS Product List
- Customer Feedback

31NT391-21-C08

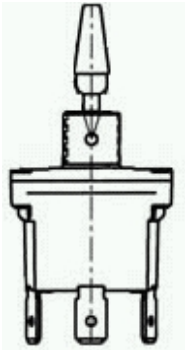

Actual product appearance may vary.

NT Series Toggle Switch, 1 pole, 3 position, Quick Connect terminal, Tab Lever

Features

Completely sealed switching chamber  
NEMA 3, 3R, 4, and 13  
UL recognized, File E12252, Vol. 1, Section 44  
CSA certified, File LR4442  
CE approved

Potential Applications

Aerial lifts, scissor lifts, truck mounted tele-handlers, and cranes  
Construction equipment  
Agriculture equipment  
Material-handling equipment  
Factory-floor control units  
Machine tool equipment manufacturers

Description

MICRO SWITCH™ NT Series toggle switches meet the need for a rugged, cost effective toggle switch. Quality construction features include a seal between the toggle lever and bushing, and between the cover and case. These switches can be used where panels are subject to splashes, hosedowns, or outdoor environments. The "Easy-Start" threaded bushing enables quick alignment of mounting nut to decrease the chance of cross threading. The panel stand-off with O-ring feature available on some listings, eliminates the need for behind-the-panel hardware, provides uniform panel height, and provides a panel to cover seal.

Supporting Documentation

- Accessory: Seals
- Accessory: Nuts

| Product Specifications                |                                                                                                           |
|---------------------------------------|-----------------------------------------------------------------------------------------------------------|
| Circuitry/Operating action            | <div><div>Keyway Position</div></div> <div><div>Opposite Keyway Position</div></div>                      |
| Product Type                          | MICRO SWITCH™ Toggle Switch                                                                               |
| Ampere/Voltage Range (Resistive Load) | 0.5 A to 20 A at 0.5 Vdc to 28 Vdc,0.5 A at 250 Vdc,0.75 A at 115 Vdc,0.5 A to 15 A at 0.5 Vac to 277 Vac |
| Circuitry                             | SPST                                                                                                      |
| Action                                | 3 position                                                                                                |
| Mounting                              | Bushing 15/32 in                                                                                          |
| Termination                           | Quick Connect                                                                                             |
| Lever Type                            | Tab                                                                                                       |
| UL/CSA Rating Code                    | L191: 15 A - 125, 250, 277 Vac; 1/2 Hp - 125 Vac; 1 Hp - 250, 277 Vac; 5 A - 120 Vac "L"                  |
| Comment                               | Yellow                                                                                                    |
| Availability                          | Global                                                                                                    |
| UNSPSC Code                           | 30211908                                                                                                  |
| UNSPSC Commodity                      | 30211908 Toggle switches                                                                                  |
| Series Name                           | NT                                                                                                        |

My Links

- Login to iCOM
- Login as Rep/AD
- Login as Guest
- Login to Digital University

Keyword Search

Search for product and support information.

All Sensing and Control

Product Search

Part number search:

Use (\*) to expand search

Specification Search