




Home> Products > MICRO SWITCH™ Toggle Switches> TW> Product Page

31TW2-62

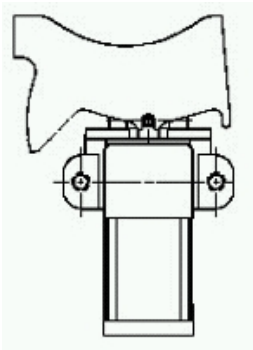

Actual product appearance may vary.

TW Series Toggle Switch, 1 pole, 2 position, ? terminal, N/A Lever

Features

- Save space and weight
- SPDT and DPDT circuitry
- Temperature range:-85° F to +160° F (-65° C to +71° C)
- Sealed bushing versions
- Choice of 1/8 in. or 15/32 in. bushing
- Color tab available on 15/32 in. bushing
- UL recognized

Potential Applications

- Industrial machinery and equipment
- Military and commercial aviation
- Construction equipment
- Test instruments
- Agricultural machinery
- Process control
- Medical instrumentation

Description

MICRO SWITCH™ miniature toggle switches in two bushing sizes. Molded in terminals are plated for soldering. Momentary and maintained circuitry closures available. Special on-on-on circuitries are also available. Pull-to-unlock levers prevent accidental operation.

Supporting Documentation

- [Accessory: Lever Sleeve](#)
- [Accessory: Seals](#)
- [Accessory: Nuts](#)
- [Engineering Drawing](#)

Product Specifications		
Circuitry/Operating action	Keyway Momentary Position 	Opposite Keyway Position 
Product Type	MICRO SWITCH™ Toggle Switch	
Ampere/Voltage Range (Resistive Load)	0.01 A to 0.1 A at 0.5 Vac to 115 Vac,0.01 A to 0.1 A at 0.5 Vdc to 28 Vdc	
Circuitry	SPST	
Action	2 position	
Mounting	Bushing 15/32 in	
Termination	IWTS (16 - 20 Gage)	
Button Type	Special Design	
Comment	FAA- PMA approved, snap - on button	
Availability	Global	
UNSPSC Code	30211908	
UNSPSC Commodity	30211908 Toggle switches	
Series Name	TW	

My Links

- [Login to iCOM](#)
- [Login as Rep/AD](#)
- [Login as Guest](#)
- [Login to Digital University](#)

Keyword Search

Search for product and support information.

All Sensing and Control

Product Search

Part number search:

Use (*) to expand search

Specification Search