




Home> Products > MICRO SWITCH™ Toggle Switches> NT> Product Page

32NT94-70L

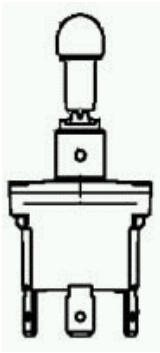

Actual product appearance may vary.

NT Series Toggle Switch, 2 pole, 3 position, Quick Connect terminal, Locking Lever

Features

- Completely sealed switching chamber NEMA 3, 3R, 4, and 13
- UL recognized, File E12252, Vol. 1, Section 44
- CSA certified, File LR4442
- CE approved

Potential Applications


- Aerial lifts, scissor lifts, truck mounted tele-handlers, and cranes
- Construction equipment
- Agriculture equipment
- Material-handling equipment
- Factory-floor control units
- Machine tool equipment manufacturers

Description

MICRO SWITCH™ NT Series toggle switches meet the need for a rugged, cost effective toggle switch. Quality construction features include a seal between the toggle lever and bushing, and between the cover and case. These switches can be used where panels are subject to splashes, hosedowns, or outdoor environments. The "Easy-Start" threaded bushing enables quick alignment of mounting nut to decrease the chance of cross threading. The panel stand-off with O -ring feature available on some listings, eliminates the need for behind-the-panel hardware, provides uniform panel height, and provides a panel to cover seal.

Supporting Documentation

- [Accessory: Seals](#)
- [Accessory: Nuts](#)
- [Engineering Drawing](#)

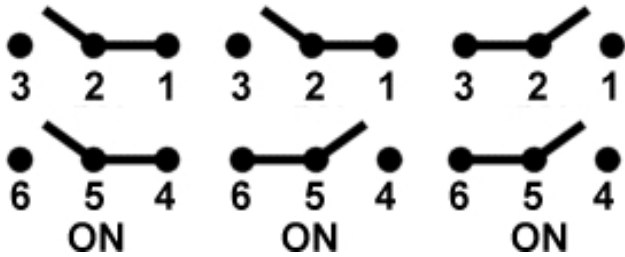Product Specifications			
Circuitry/Operating action	Keyway Momentary Position Center Maintained Position Opposite Keyway Momentary Position 		
Product Type	MICRO SWITCH™ Toggle Switch		
Lever Lock	 Locked out of extreme position (Keyway side)		
Ampere/Voltage Range (Resistive Load)	0.5 A to 18 A at 0.5 Vdc to 28 Vdc,0.5 A at 250 Vdc,0.5 A to 10 A at 0.5 Vac to 277 Vac,0.75 A at 115 Vdc		
Circuitry	DPDT		
Action	3 position		
Mounting	Bushing 15/32 in		
Termination	Quick Connect		
Lever Type	Locking		
UL/CSA Rating Code	L192: 10 A - 125, 250, 277 Vac; 1/4 Hp - 125 Vac; 1/2 Hp - 250, 277 Vac; 3 A - 125 Vac "L"		
Comment	Switches are capable of withstanding a temperature of 160 degrees F continuously at full rated load		
Availability	Global		
UNSPSC Code	30211908		
UNSPSC Commodity	30211908 Toggle switches		
Series Name	NT		

My Links

- Login to iCOM
- Login as Rep/AD
- Login as Guest
- Login to Digital University

Keyword Search

Search for product and support information.

All Sensing and Control▼

Product Search

Part number search:

Use (*) to expand search

Specification Search