




Home> Products > MICRO SWITCH™ Toggle Switches> TL > Product Page

3TL32-1-3D



Actual product appearance may vary.

TL Series Toggle Switch, 3 pole, 3 position, Leadwire terminal, Locking Lever

Features

- Environmentproof sealing
- 1,2, and 4 pole circuitry
- Standard and pull-to-unlock levers
- 2 and 3 position, maintained and momentary toggle action
- Temperature range: -85° F to +160° F
- Completely sealed switching chamber
- Step-design case provides added space between terminals to help prevent shorting
- UL recognized, CSA certified
- CE approved

Description


MICRO SWITCH™TL Series toggle switches have high strength, temperature resistant, non-tracking case material and silver cadmium oxide contacts. Pull-to-Unlock toggle levers prevent accidental operation; the lever must be pulled approx. 2,3 mm (0.09 inches) to change positions.

Supporting Documentation

 [Accessory: Seals](#)

 [Accessory: Nuts](#)

 [Engineering Drawing](#)

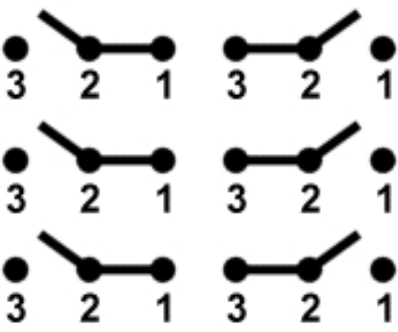Product Specifications	
Circuitry/Operating action	Keyway Position Opposite Keyway Position 
Product Type	MICRO SWITCH™ Toggle Switch
Lever Lock	 Locked out of center position
Ampere/Voltage Range (Resistive Load)	0.1 A to 10 A at 0.5 Vdc to 28 Vdc
Circuitry	3PDT
Action	3 position
Mounting	Bushing 15/32 in
Lamp Type	Incandescent
Termination	Leadwire
Lever Type	Locking
UL/CSA Rating Code	L191: 15 A - 125, 250, 277 Vac; 1/2 Hp - 125 Vac; 1 Hp - 250, 277 Vac; 5 A - 120 Vac "L"
Comment	FAA- PMA approved, special lever construction to incorporate lighted button
Availability	Global
UNSPSC Code	30211908
UNSPSC Commodity	30211908 Toggle switches
Series Name	TL

Keyword Search

Search for product and support information.

All Sensing and Control▼

Product Search

Part number search:

Use (*) to expand search

Specification Search