
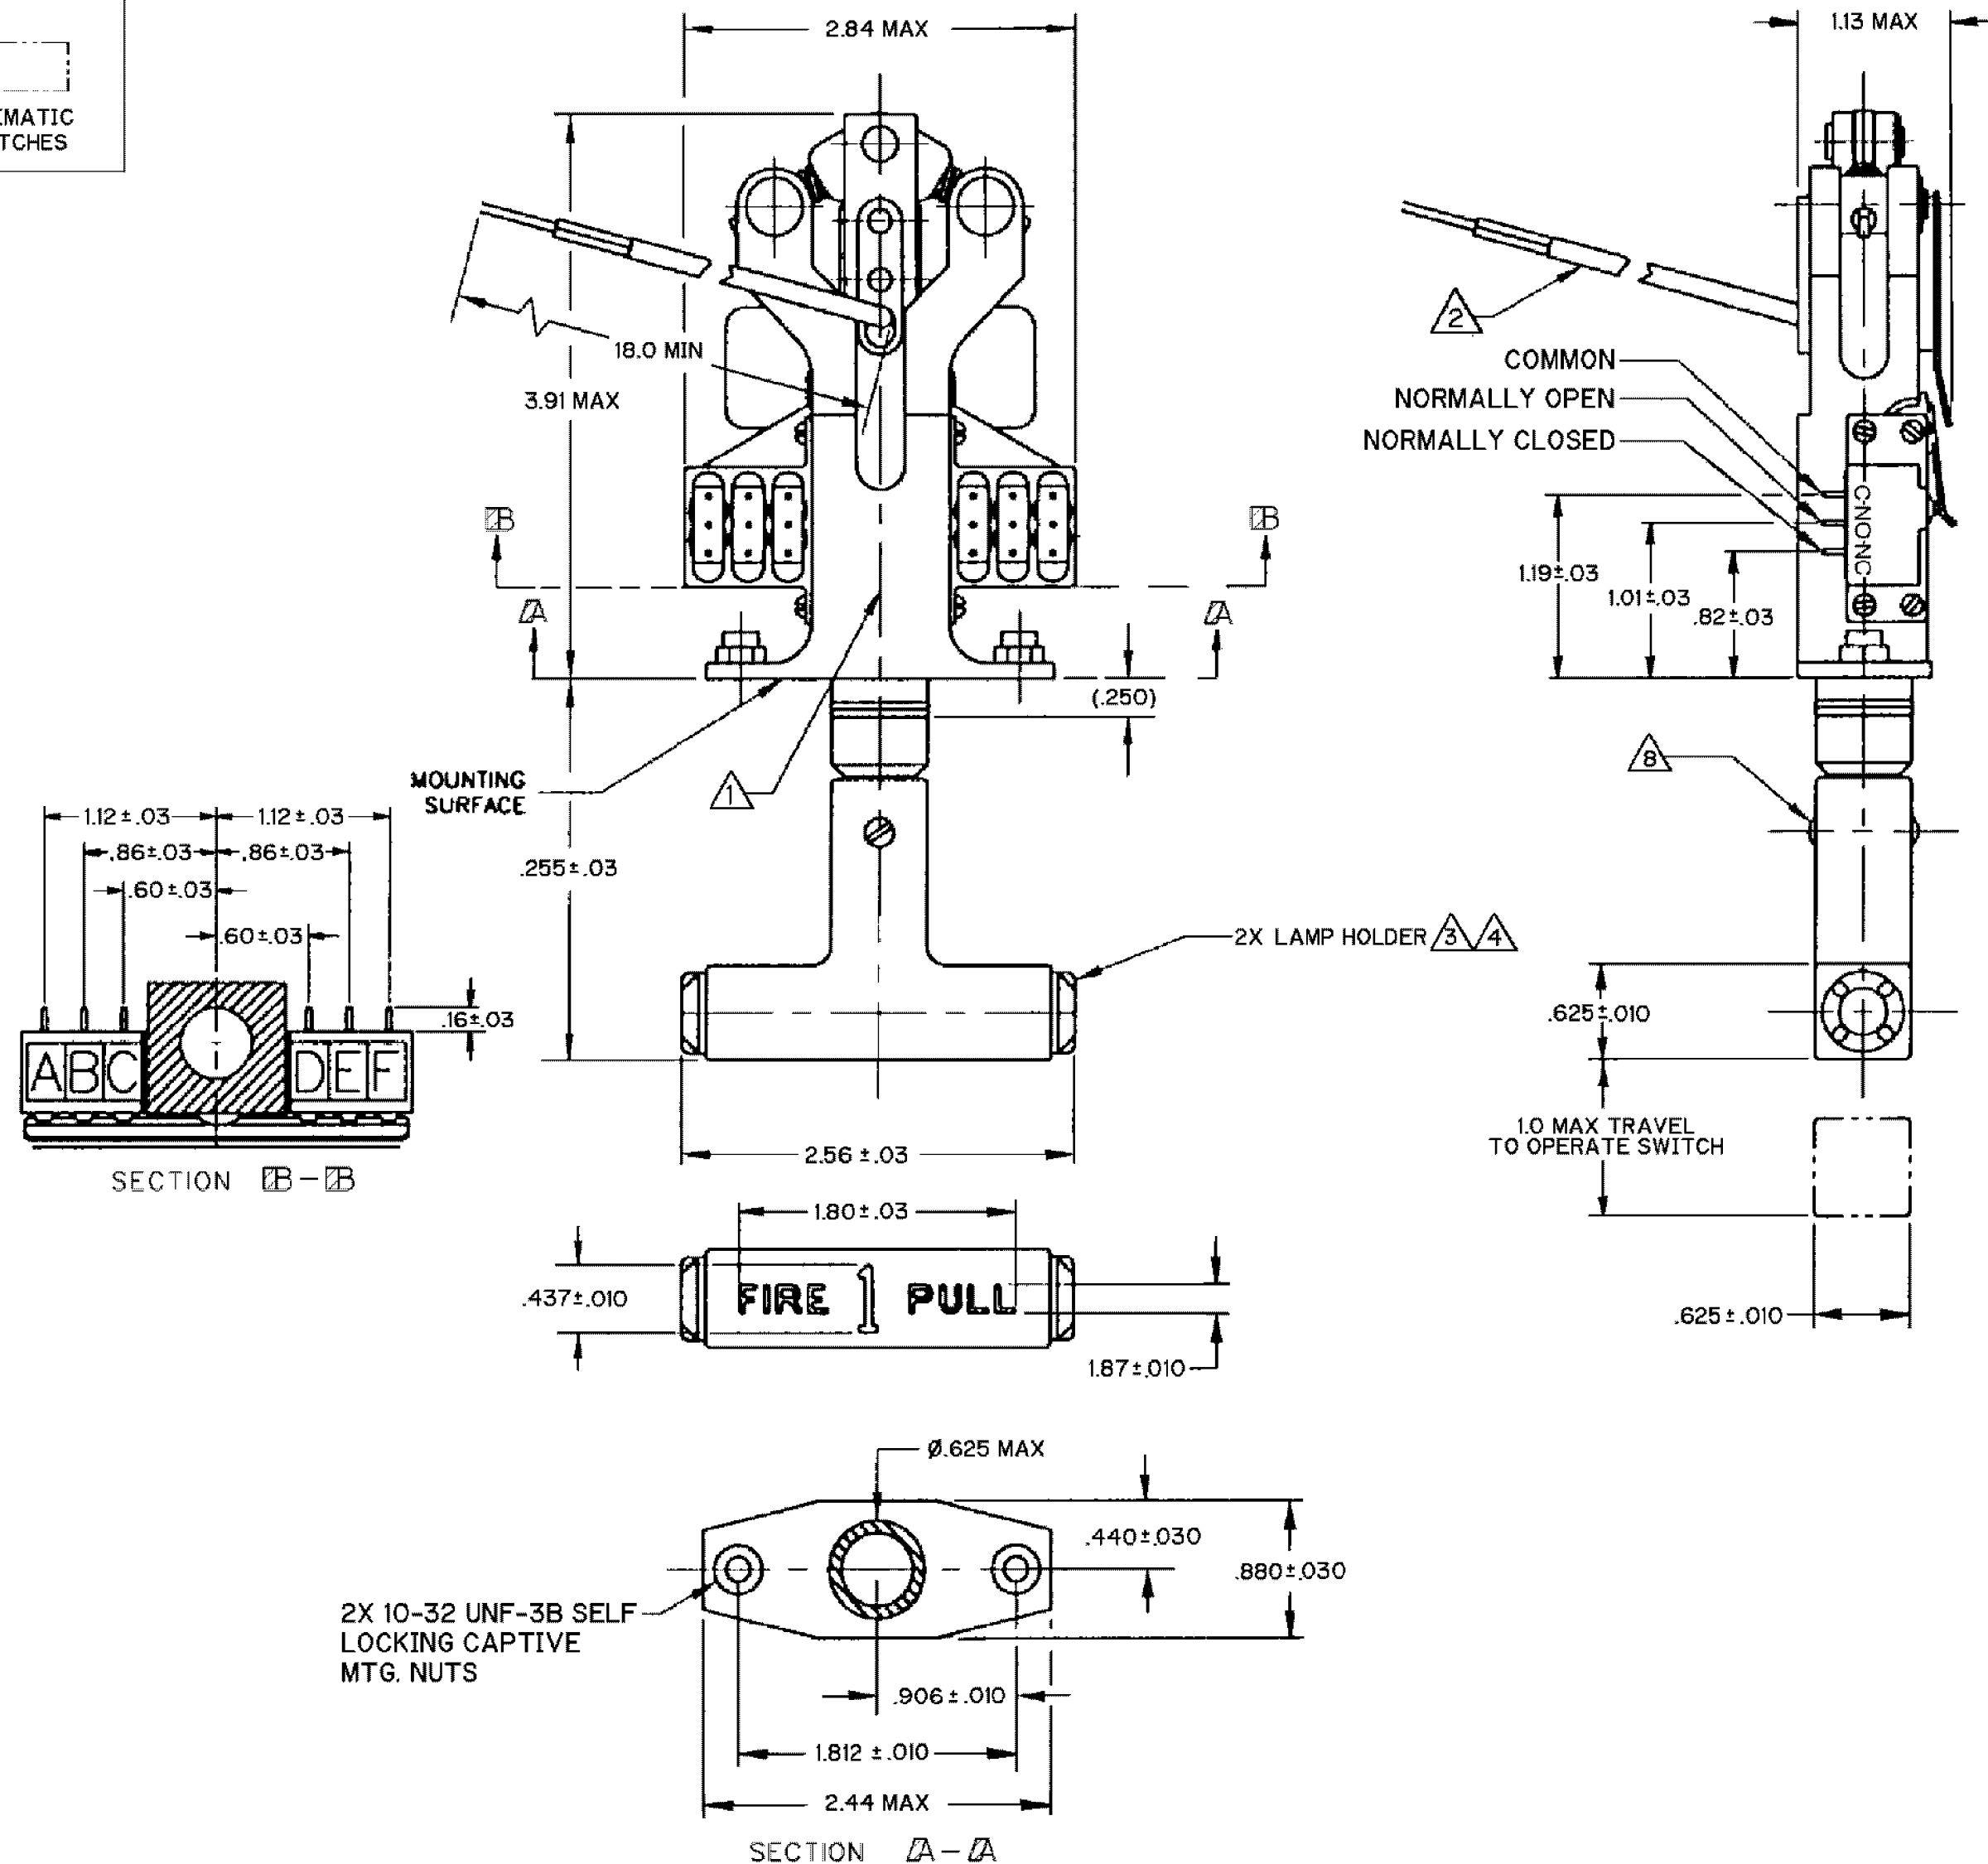
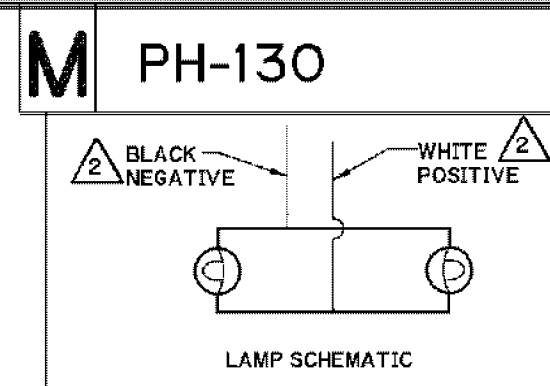


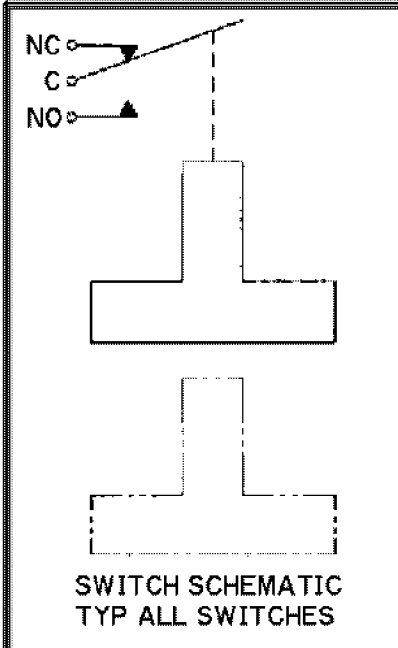

- NOTES
- 1 MARK MANUFACTURER'S NAME, CATALOG LISTING, FED. MFG. CODE AND DATE CODE
 - 2 2X ELECTRICAL LEADS TO LAMPS: 20 GAGE PER MIL-W-81044/6
 - 3 2X FILTERS: RED MS250101-13A
 - 4 2X LAMPS: MS25237-327 (28 VOLTS)
 - 5 - MAXIMUM POWER CONSUMPTION PER LAMP TO BE 4.5 WATTS
 - 6 - TEE HANDLE: MATTE PLASTIC PER MIL-STD-395, PAINTED RED, COLOR NUMBER 31136 PER FED-STD-595
 - 7 - HANDLE MUST NOT APPEAR LIT UNDER AMBIENT LIGHT CONDITIONS AND MUST APPEAR LIT WHEN ENERGIZED UNDER AMBIENT LIGHT CONDITIONS
 - 8 TORQUE FASTENER 4 TO 6 IN-LB MAXIMUM AFTER INSTALLATION
 - 9 - CONTACTS SEALED PER MIL-PRF-8805 SYMBOL 3 (WATERTIGHT)

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.			
CHARACTERISTICS		ELECTRICAL DATA	
OPERATING FORCE — — — 7 - 10 LBS		CONTACT ARRANGEMENT	
OVERTRAVEL — — — .075 MIN		6X S P D T	
TOTAL TRAVEL — — — .9 TYP		28 VDC	
FUNCTIONAL LAMP LIFE — 25 OPERATIONS MIN		SEA LEVEL 50,000 FT	
		CONTACT SILVER SILVER	
		RESISTIVE 7 4	
		INDUCTIVE 4 2.5	
		MOTOR — —	

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		CATALOG LISTING	
MICRO SWITCH a Honeywell Division		PH-130	
FED. MFG. CODE 01929		SWITCH - ENCLOSED	
		THIRD ANGLE PROJECTION	
		SCALE FULL	
		DO NOT SCALE PRINT	
		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
		ONE PLACE (.0) ±.030	
		TWO PLACES (.00) ±.015	
		THREE PLACES (.000) ±.005	
		ANGLES ± 4°	
		WEIGHT .55 LB MAX	