



HONEYWELL

RDS-CL-05

See full Datasheet below...

onlinecomponents.com

THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

BUY NOW




MASTERTM
E L E C T R O N I C S


BUY NOW

masterelectronics.com & onlinecomponents.com
are **authorized** e-commerce distributors
of electronic components.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

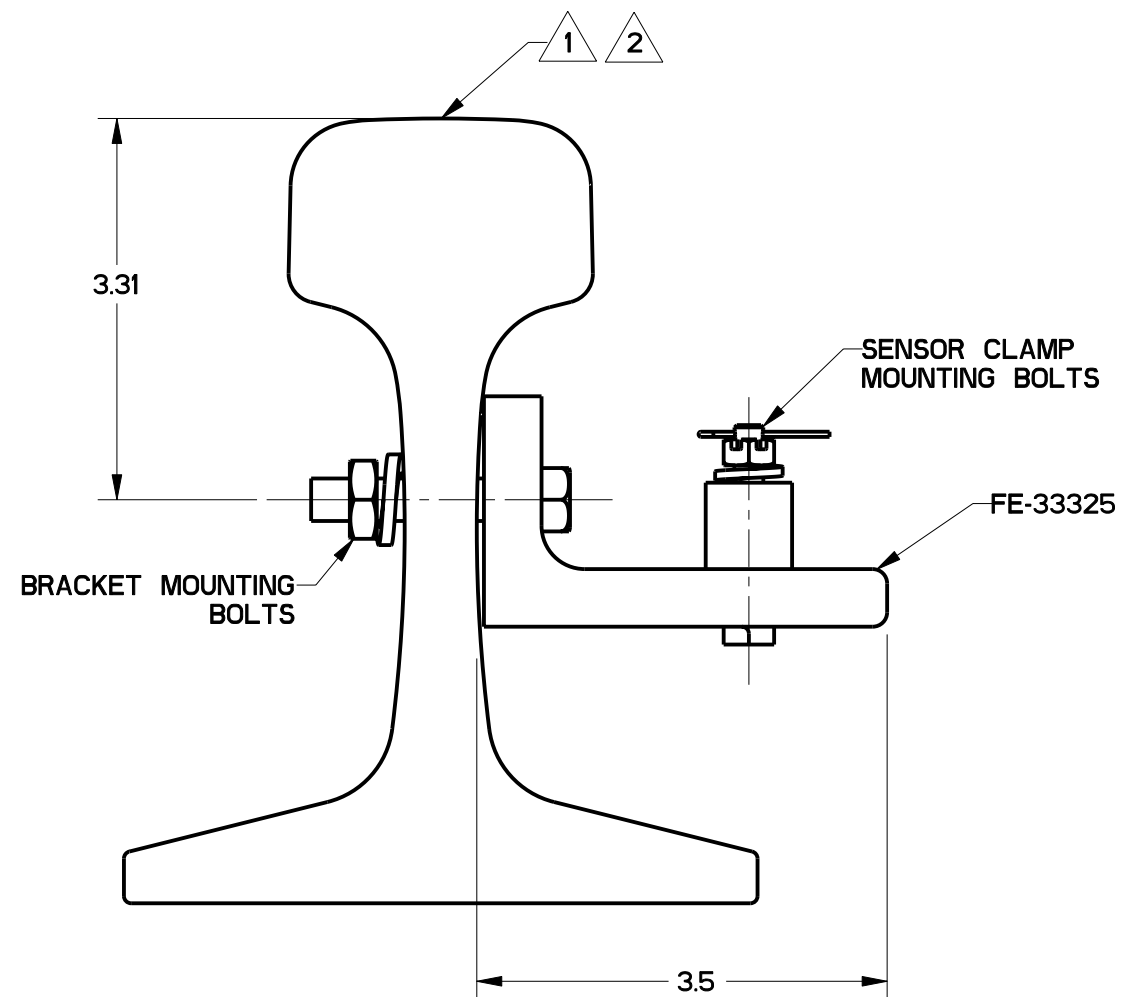

- 1 DESIGNED TO BE MOUNTED ON RAILS:
119RE, 132RE, 133RE, 136RE AND 140RE
 - 2 RAIL SECTION SHOWN FOR ILLUSTRATION PURPOSES ONLY
 - 3 SLOTS PROVIDE UP TO .5 ADJUSTMENT TO
ACCOMMODATE RAIL WEAR

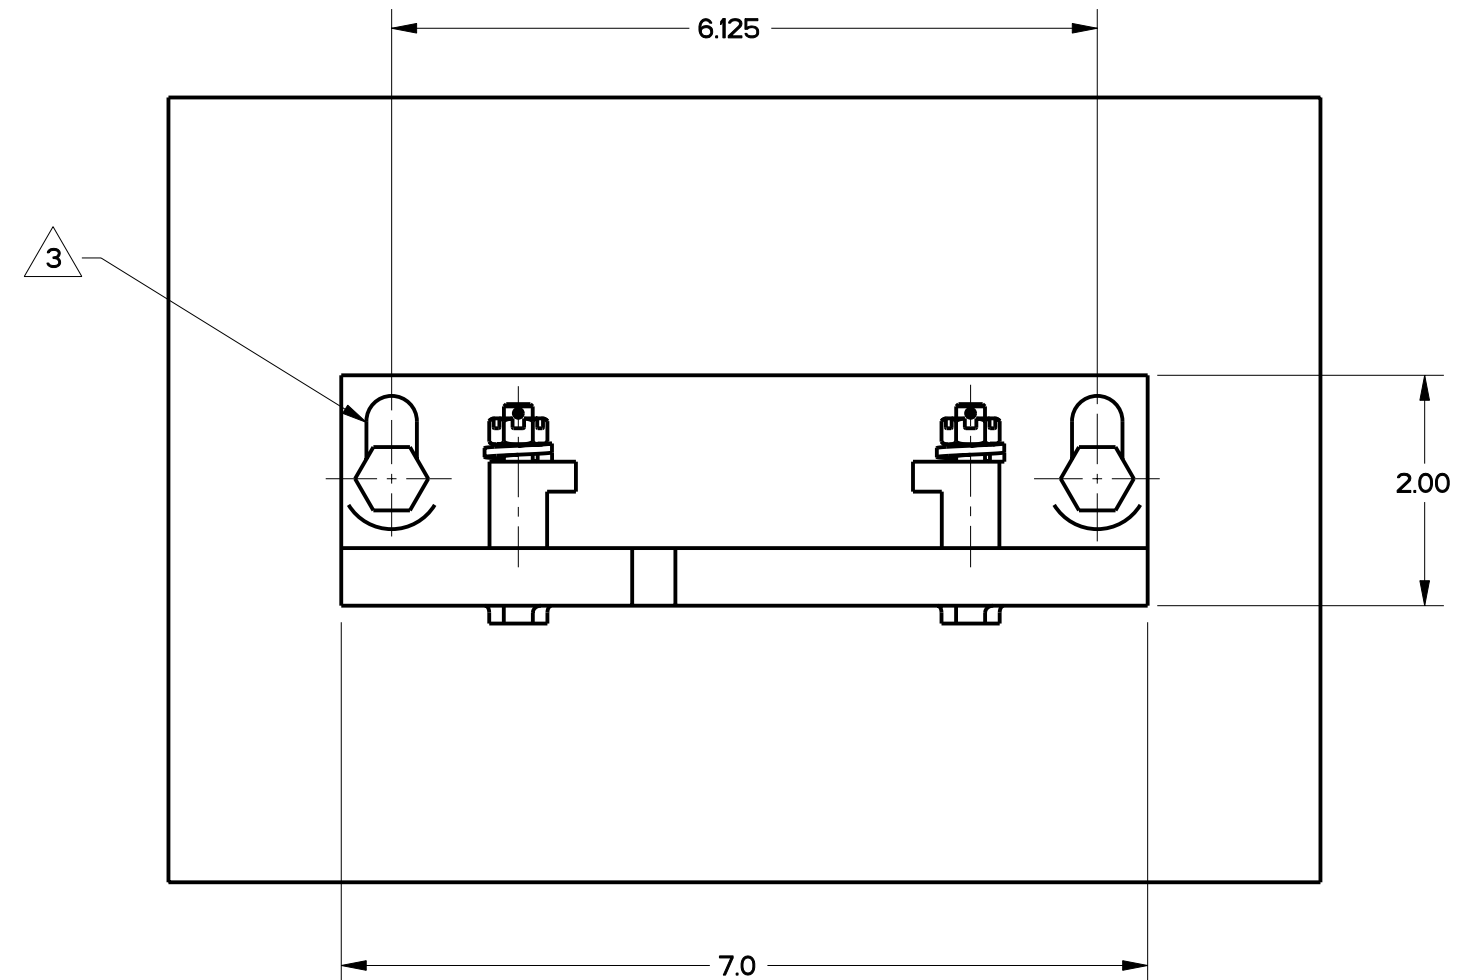

OPERATING TEMPERATURE: -40°C TO 85°C
SHOCK: 500g, HALFSINE 1.6 mSEC (IEC68-2-27)
VIBRATION: SINUSOIDAL 10-2000 Hz, 20G, (IEC68-2-6)
30 MINUTES EACH AXIS FOR
TEMPERATURES -40°C, 25°C AND 85°C
MOUNTING TORQUE:
BRACKET MOUNTING BOLTS: 35 FT-LBS
SENSOR CLAMP MOUNTING BOLTS: 7 FT-LBS

THIRD ANGLE PROJECTION	
	
SCALE	NONE
DO NOT SCALE PRINT	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
ONE PLACE	(.0) $\pm .030$
TWO PLACE	(.00) $\pm .015$
THREE PLACE	(.000) $\pm .005$
ANGLES	$\pm$
WEIGHT	