



HONEYWELL

RDS-CL-09

See full Datasheet below...

onlinecomponents.com

THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

BUY NOW




MASTERTM
E L E C T R O N I C S


BUY NOW

masterelectronics.com & onlinecomponents.com
are **authorized** e-commerce distributors
of electronic components.

HONEYWELL PART NUMBER RDS-CL-09	REV	DOCUMENT	CHANGED BY	CHECK
	A	0011814	CVS 17MAR05	AK

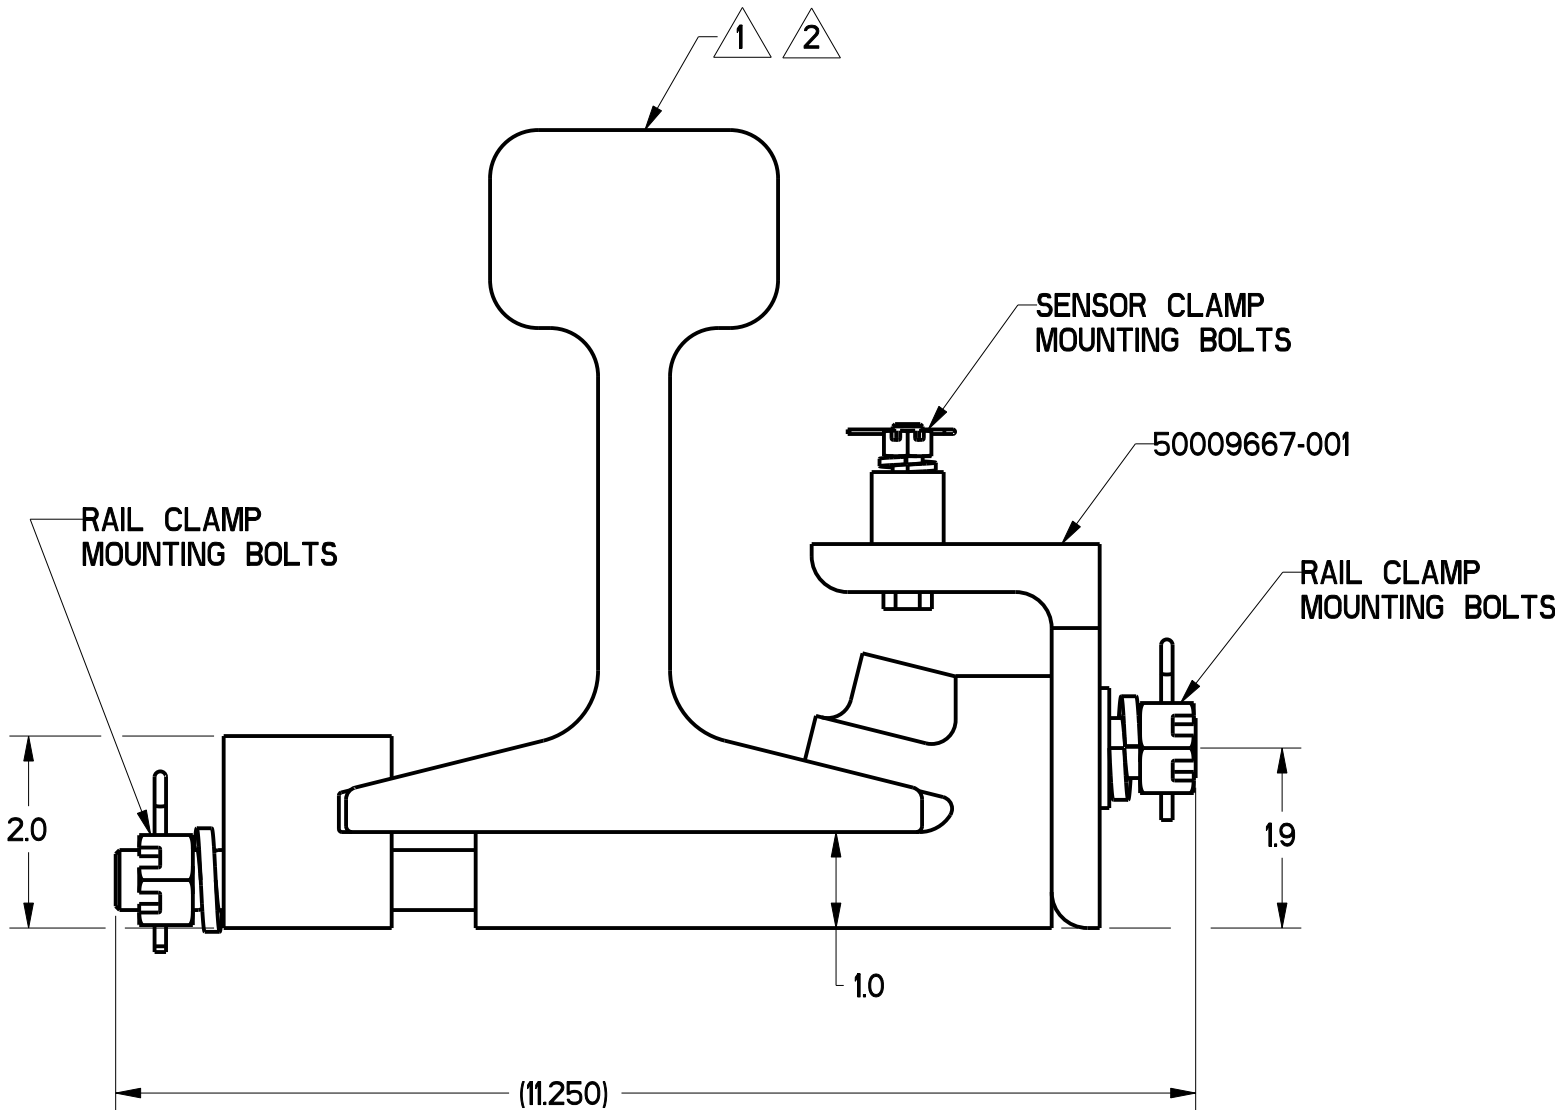

- NOTES
- 1 DESIGNED TO BE MOUNTED ON RAILS 119RE, 132RE, 133RE, 136RE AND 140RE
 - 2 RAIL SECTION SHOWN FOR ILLUSTRATION PURPOSES ONLY

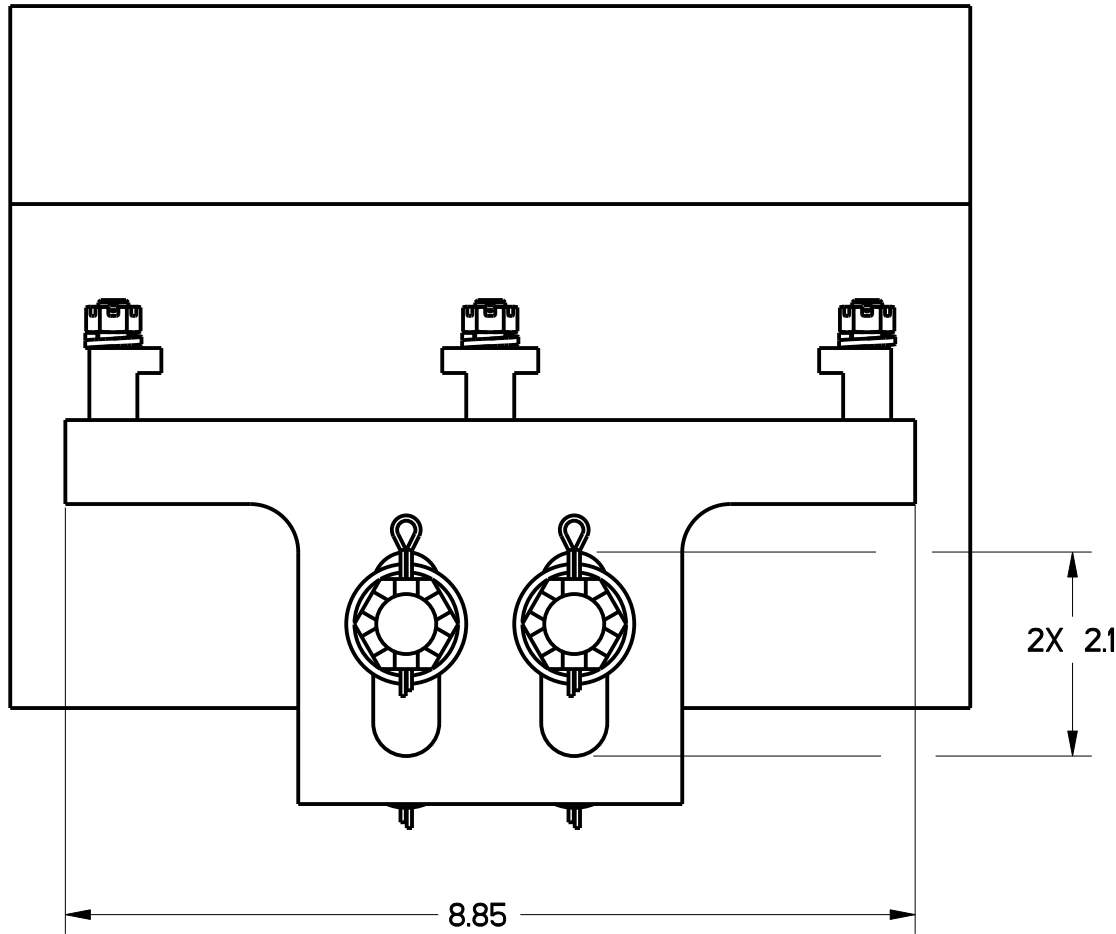

MECHANICAL SPECIFICATIONS:

OPERATING TEMPERATURE: -40°C TO 85°C

SHOCK: 500g, HALFSINE 1.6 mSEC (IEC68-2-27)

VIBRATION: SINUSOIDAL 10-2000 Hz, 20G (IEC68-2-6)

30 MINUTES EACH AXIS FOR TEMPERATURES -40°C, 25°C AND 85°C

MOUNTING TORQUE:

RAIL CLAMP MOUNTING BOLTS: 120 FT-LBS

SENSOR CLAMP MOUNTING BOLTS: 7 FT-LBS

DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± 0 ONE PLACE .X ± 0.0 TWO PLACE .XX ± 0.01 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± 0.0005 ANGLES X ± 3	DRAWN	MJS	25 FEB 05	Honeywell		
	CHECK	-	25 FEB 05			
	THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE BRACKET, SUBASSEMBLY		
THIRD ANGLE PROJECTION 	INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE C	TYPE I	DRAWING NAME RDS-CL-09
	Pro/ENGINEER 3D			SCALE 1:1	SHEET 1 OF 1	