




7936 Series

D-SUB Double Port Right Angle Type

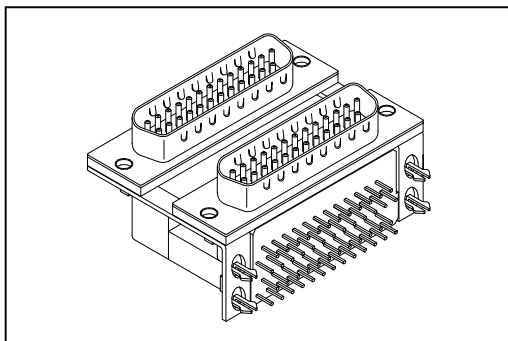

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Copper Alloy.

Shell: Metal.

Electrical Characteristics:

Current Rating: 1 A.

Dielectric Withstanding Voltage: AC 1000V.


Insulator Resistance: 1000MΩ min.

Contact Resistance: 30mΩ max.

Operating Temperature: -55°C~+105°C.

Features:

* Mates with: 7907, 7908.

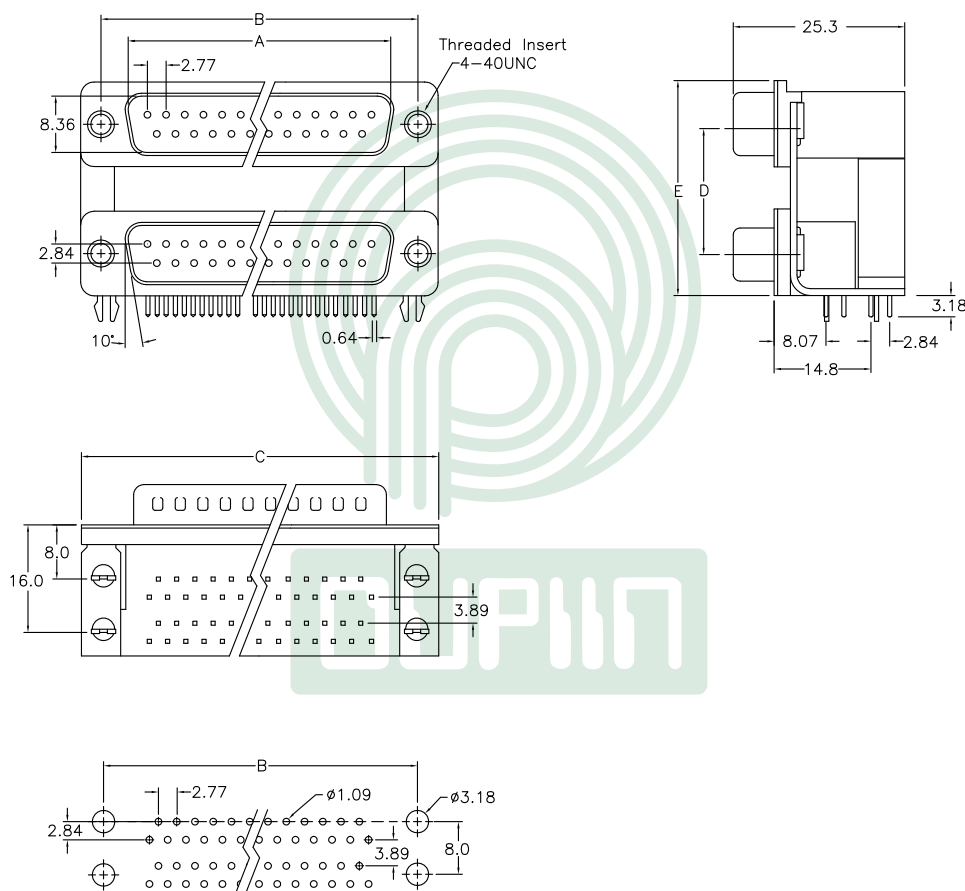

P.C. Board Layout

Position	Dimension								
	A(M)	A(F)	B	C	D			E	
9	16.92	16.32	24.99	30.81	15.88	19.05	22.86	28.43	31.60
15	25.25	24.66	33.32	39.14	15.88	19.05	22.86	28.43	31.60
25	38.96	38.38	47.04	53.04	15.88	19.05	22.86	28.43	31.60

Ordering information

7936-

Series

25

Position

M

Top

M: Male

F: Female

M

Bottom

M: Male

F: Female

B

B: Grounding Fork

H: Grounding Fork, Jack

Screw Separately

K: Grounding Strap

1

1: 15.88 See Dim: D

2: 19.05 See Dim: D

3: 22.86 See Dim: D

A

A: Tray

Package

* Mix shell size available, Please consult factory.

Information including designs, specifications and components may be changed or updated without notice.