


V23101D 102A201 Product Details

Share Print Email

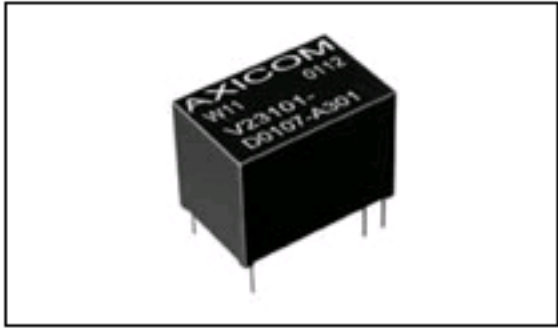

V23101D 102A201
(2-1393779-4)

TE Internal Number: 2-1393779-4

Active

View 3D PDF

Communications/Signal PC Board Relays

Converted to EU RoHS/ELV Compliant (Statement of Compliance)

Product Highlights:

- V23101 / W11 Relay Series
- DC Actuating System
- Input Voltage = 3 VDC
- Contact Arrangement = 1 Form C, SPDT, 1 C/O
- Contact - Rated Current = 1 A

View all Features

Quick Links

- Check Pricing & Availability
- Search for Tooling
- Product Feature Selector
- Contact Us About This Product

Add to My Part List Request Sample Find Similar Products Buy Product

Documentation & Additional Information

Product Drawings:

- None Available

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- W11 Relay Datasheet (PDF, English)

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files: (CAD Format & Compression Information)

- 2D Drawing (DXF, Version S00C)
- 3D Model (IGES, Version S00C)
- 3D Model (STEP, Version S00C)

Additional Information:

- Product Line Information

Related Products:

- Tooling

List all Documents

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- Series = V23101 / W11 Relay
- Termination Type = Through Hole

Electrical Characteristics:

- Actuating System = DC
- Input Voltage (VDC) = 3
- Contact - Rated Current (A) = 1
- Coil Resistance (Ω) = 45
- Coil - Rated Power (mW) = 200
- Insulation - Special Features = None
- Insulation - Initial Dielectric Between Contacts and Coil (V rms) = 1000

Body Features:

- Polarized = No

Contact Features:

- Mounting Options = PC Board
- Enclosure Type = Immersion Cleanable
- Contact Base Material = Silver Palladium, Gold Overlay
- Approx. Dimensions (L x W x H) (mm [in]) = 15.60 x 10.60 x 11.50 [.614 x .417 x .453]
- Contact Configuration = Single
- Pin Configuration = DIP

Configuration Features:

- Contact Arrangement = 1 Form C, SPDT, 1 C/O
- Coil - Magnetic System = Non Polarized, Monostable
- Coil Suppression Diode = Without

Industry Standards:

- Approved Standards = None
- RoHS/ELV Compliance = RoHS compliant, ELV compliant
- Lead Free Solder Processes = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- RoHS/ELV Compliance History = Converted to comply with RoHS directive

Other:

- Brand = Axicom
- Comment = Symmetrical terminal assignment, Standard 6-pin version

Corporate Information

Who We Are
Investors
News Room
Supplier Portal
Careers

Quick Links

Check Distributor Inventory
Cross Reference
Find Documents & Drawings
Product Compliance Support Center
Site Map

Customer Support

Email or Chat With Us
Find a Phone Number
Search Knowledge Base
Manage your Account

Keep Me Informed

Receive TE News, Events & Technology Updates

Enter your email address

