

Sensor/actuator cable - SAC-17P-15,0-PVC/FS SCO - 1401726

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Sensor/actuator cable, 17-position, PVC, black RAL 9005, free cable end, on Socket straight M12 SPEEDCON, A-coded, cable length: 15 m



Key Commercial Data

Packing unit	1 pc
Minimum order quantity	25 pc
GTIN	 4 046356 570107
GTIN	4046356570107
Weight per Piece (excluding packing)	1,000.000 g
Custom tariff number	85444290
Country of origin	Germany

Technical data

Dimensions

Length of cable	15 m
Cable diameter	6.4 mm
Stripping length of the free conductor end	35 mm

Ambient conditions

Degree of protection	IP65
	IP67
	IP68

General

Rated current at 40°C	1.5 A
-----------------------	-------

Sensor/actuator cable - SAC-17P-15,0-PVC/FS SCO - 1401726

Technical data

General

Rated voltage	30 V AC
	30 V DC
Number of positions	17
Insulation resistance	$\geq 10 \text{ M}\Omega$
Coding	A - standard
Status display	No
Overvoltage category	II
Degree of pollution	3

Material

Flammability rating according to UL 94	HB
Contact material	CuZn
Contact surface material	Ni/Au
Contact carrier material	TPU GF
Material of grip body	TPU, hardly inflammable, self-extinguishing
Material, knurls	Zinc die-cast, nickel-plated
Sealing material	NBR

Standards and Regulations

Flammability rating according to UL 94	HB
--	----

Cable

Conductor cross section	17x 0.14 mm ² (Signal line)
AWG signal line	26
Conductor structure signal line	18x 0.10 mm
Core diameter including insulation	1 mm $\pm$ 0.05 mm (Signal line)
Wire colors	white, brown, green, yellow, gray, pink, blue, red, black, violet, gray-pink, red-blue, white-green, brown-green, white-yellow, yellow-brown, white-gray
Overall twist	17 wires twisted in layers
External sheath, color	black RAL 9005
External cable diameter D	6.8 mm
Smallest bending radius, fixed installation	34 mm
Smallest bending radius, movable installation	102 mm
Outer sheath, material	PVC
Material conductor insulation	PVC
Conductor material	Bare Cu litz wires
Insulation resistance	$> 10 \text{ M}\Omega \cdot \text{km}$
Conductor resistance	$\leq 142 \text{ }\Omega/\text{km}$ (at 20 °C)
Nominal voltage, cable	250 V

Sensor/actuator cable - SAC-17P-15,0-PVC/FS SCO - 1401726

Technical data

Cable


Test voltage Core/Core	1500 V AC
Flame resistance	DIN EN 50265-2-1
Ambient temperature (operation)	-25 °C ... 80 °C (cable, fixed installation)
	-5 °C ... 80 °C (cable, flexible installation)

Environmental Product Compliance

	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings


Dimensional drawing

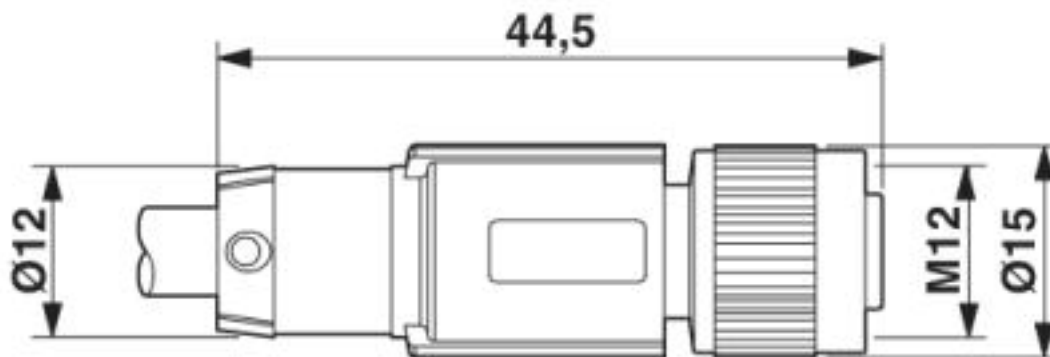

M12-SPEEDCON socket, straight

Sensor/actuator cable - SAC-17P-15,0-PVC/FS SCO - 1401726


Circuit diagram

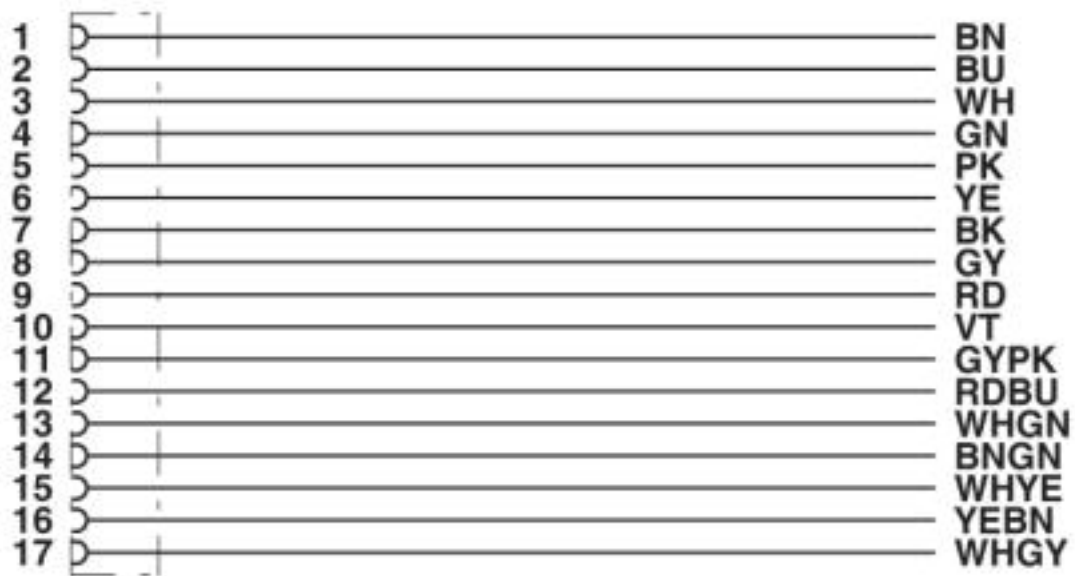

Contact assignment of the M12 socket

Sensor/actuator cable - SAC-17P-15,0-PVC/FS SCO - 1401726

Schematic diagram

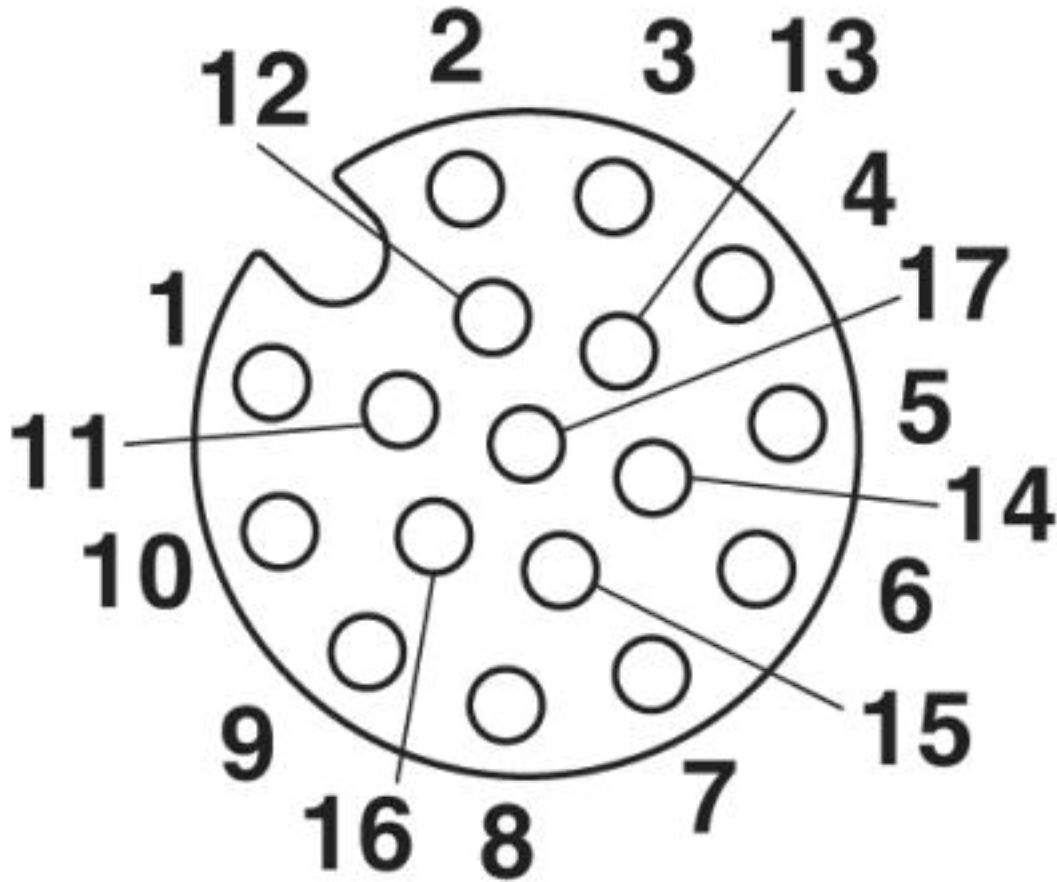

Pin assignment M12, 17-pos., socket side view

Sensor/actuator cable - SAC-17P-15,0-PVC/FS SCO - 1401726

Cable cross section



PVC black [PVC]

Classifications

eCl@ss

eCl@ss 4.0	27060300
eCl@ss 4.1	27060300
eCl@ss 5.0	27061800
eCl@ss 5.1	27061800
eCl@ss 6.0	27279200
eCl@ss 7.0	27279218
eCl@ss 8.0	27279218

Sensor/actuator cable - SAC-17P-15,0-PVC/FS SCO - 1401726

Classifications

eCl@ss

eCl@ss 9.0	27060311
------------	----------

ETIM

ETIM 2.0	EC000830
ETIM 3.0	EC001855
ETIM 4.0	EC001855
ETIM 5.0	EC001855
ETIM 6.0	EC001855
ETIM 7.0	EC001855

UNSPSC

UNSPSC 6.01	31251501
UNSPSC 7.0901	31251501
UNSPSC 11	31251501
UNSPSC 12.01	31251501
UNSPSC 13.2	31251501
UNSPSC 19.0	31251501
UNSPSC 20.0	31251501
UNSPSC 21.0	31251501

Approvals

Approvals

Approvals

UL Listed

Ex Approvals

Approval details

UL Listed		http://database.ul.com/cgi-bin/XYVV/template/LISEXT/1FRAME/index.htm	FILE E 221474
Nominal voltage UN	30 V		
Nominal current IN	1 A		

