

Device connector, rear mounting - PRC 3-FT25-MC4-150 - 1409220

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Circular connectors (device-side), Range of articles: PRC, Device connector, rear mounting, housing material: PPE, color: black, number of positions: 3, max. conductor cross section: 4 mm², nom. voltage: 690 V AC, rated current: 32 A, Connection method: Crimp connection, Type of contact: Pin, cable length: 150

RoHS

Key Commercial Data

Packing unit	1 pc
Minimum order quantity	10 pc
GTIN	 4 046356 867733
GTIN	4046356867733
Weight per Piece (excluding packing)	42.000 g
Custom tariff number	85444290
Country of origin	Poland

Technical data

General data

Number of positions	3
Protection class	II
Color	black
Locking type	Snap-in locking
Insertion/withdrawal cycles	100
Pull-out-force	150 N ± 50 N
Insertion force	30 N ± 10 N
Degree of protection (not plugged in)	IP65 (Lengthwise waterproofing)
Degree of protection (when plugged in)	IP66 / IP68 (2m / 24h) / IP69K

Connection data

Device connector, rear mounting - PRC 3-FT25-MC4-150 - 1409220

Technical data

Connection data

Rated current	32 A (With 4 mm ² conductor cross section in accordance with IEC 61984)
	25 A (With 4 mm ² conductor cross section in accordance with IEC 61535)
	17.3 A (With 4 mm ² conductor cross section and 85 °C in accordance with 2 PFG 1915)
	32 A (With 4 mm ² /AWG 12, in accordance with UL 2238)
Nominal voltage ATD	690 V AC (in accordance with IEC 61984)
	500 V AC (in accordance with IEC 61535/2 PFG 1915)
	600 V AC (In accordance with UL 2238)
Rated voltage (III/2)	690 V
Torque	2.5 Nm ±0.1 Nm (Tightening torque nut)
Wrench size, union nut	32 mm
Type of contact	Pin
Conductor cross section flexible max.	4 mm ²

Material data

Contact material	Cu
Contact surface material	Ag
Contact carrier material	PPE
Flammability rating according to UL 94	V0

Conductor data

Fixed cable length	150 mm
Single wire, material	PVC
Single wire, color	black, blue, green/yellow
Wire diameter incl. insulation	4.15 mm ±0.15 mm

Standards and Regulations

Flammability rating according to UL 94	V0
CE safety note	• WARNING: Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible.
	• WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.
	WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.
	• Assembled products may not be manipulated or improperly opened.

Device connector, rear mounting - PRC 3-FT25-MC4-150 - 1409220

Technical data

Standards and Regulations

	Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products).
	When using the product in direct connection with third-party manufacturers, the user is responsible.
	For operating voltages > 50 V AC, conductive connector housings must be grounded
	Ensure that the protective or functional ground has been properly connected.
	VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector
	- Observe the corresponding technical data. You will find information: - On the product - On the packing label - In the supplied documentation - Online at phoenixcontact.com/products under the product
	Only use tools recommended by Phoenix Contact
	The installation notes/Design In documents online on the download page at phoenixcontact.com/products must be observed for this product.
	Use a protective cap to protect connectors that are not in use. The suitable accessories are available online in the accessory section of the product at phoenixcontact.com/products
	Operate the connector only when it is fully plugged in.
	Operate the connector only when it is fully plugged in and interlocked.
	Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.
	Observe the minimum bending radius of the cable. Lay the cable without twisting it.
	The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).


Environmental Product Compliance

	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Device connector, rear mounting - PRC 3-FT25-MC4-150 - 1409220


Schematic diagram

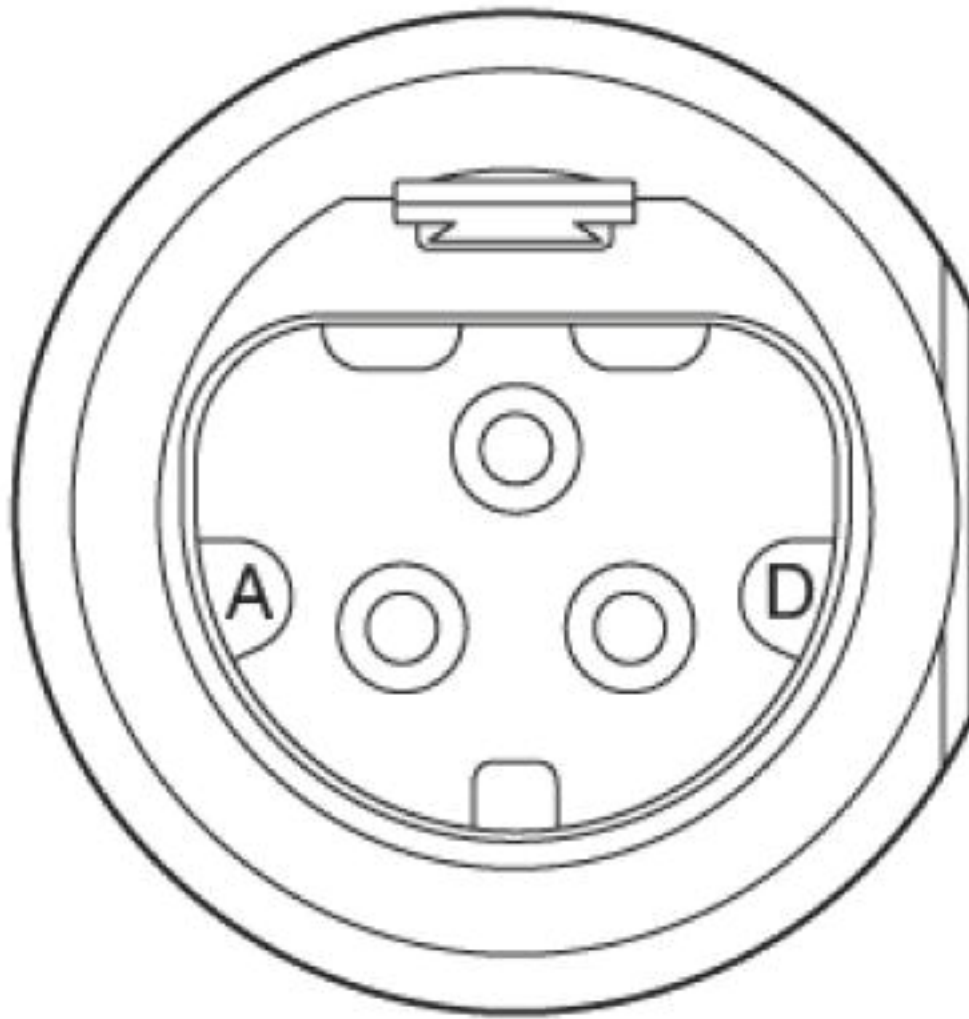

Connector pin assignment

Device connector, rear mounting - PRC 3-FT25-MC4-150 - 1409220


Dimensional drawing

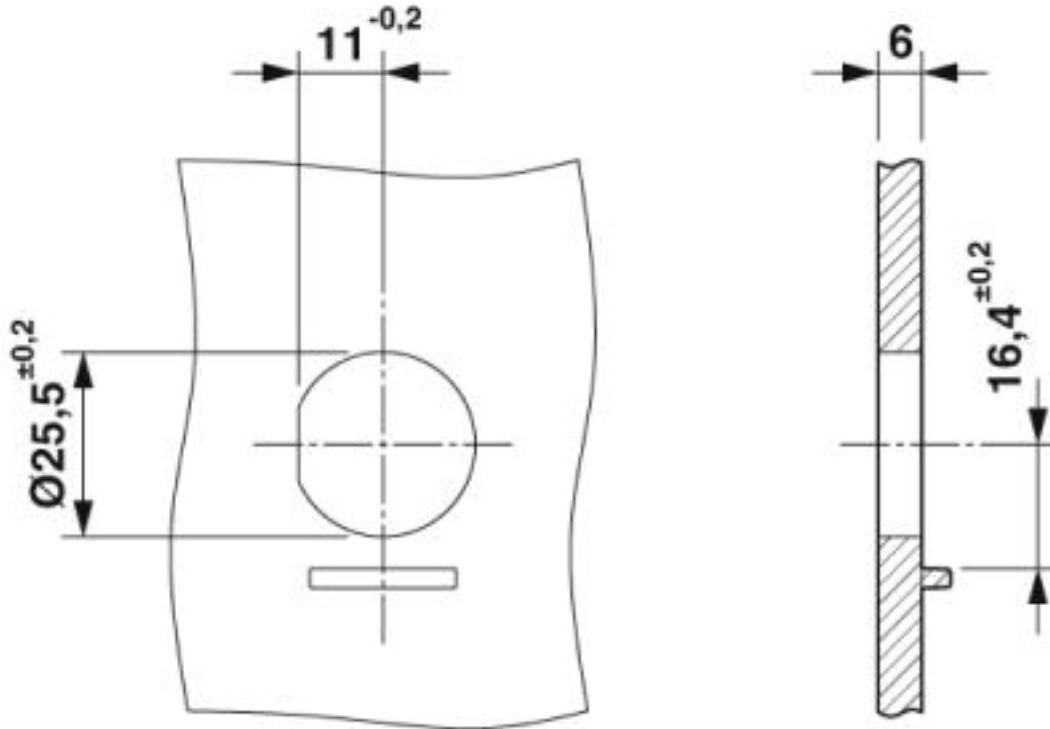

Housing cutout


Device connector, rear mounting - PRC 3-FT25-MC4-150 - 1409220

Dimensional drawing

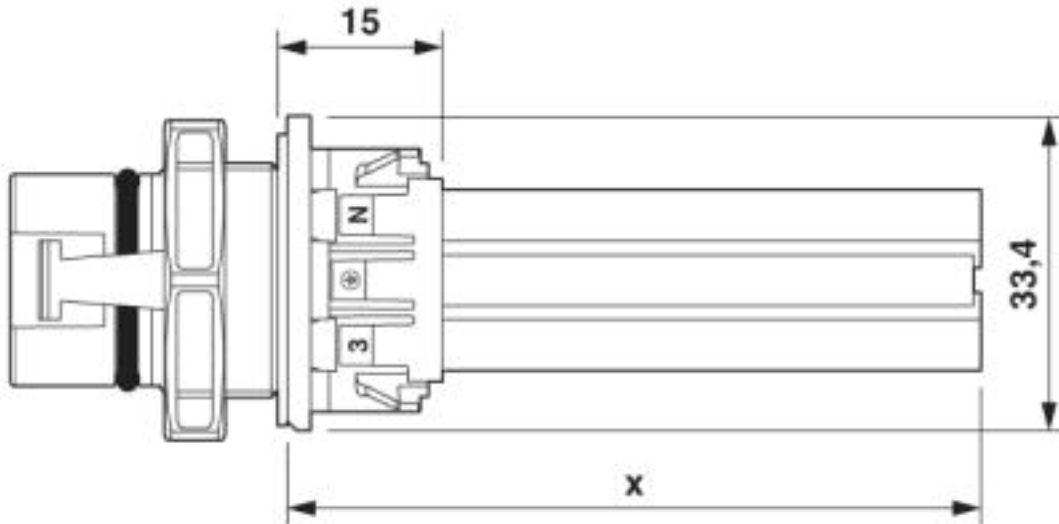

Dimensional drawing

Dimensional drawing

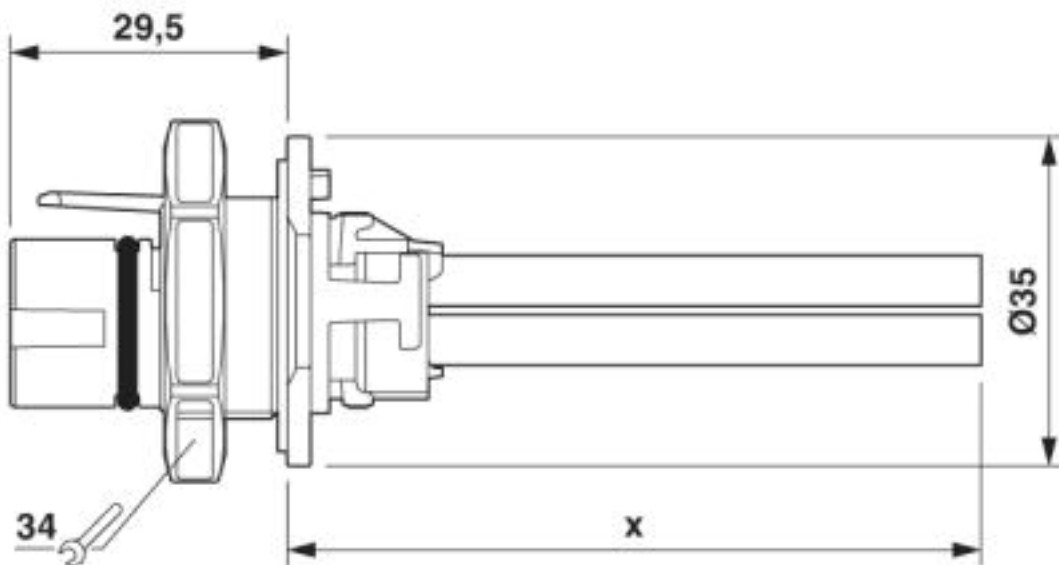

Dimensional drawing

Device connector, rear mounting - PRC 3-FT25-MC4-150 - 1409220

Classifications

eCl@ss

eCl@ss 4.0	27260700
eCl@ss 4.1	27260700
eCl@ss 5.0	27260700
eCl@ss 5.1	27260700
eCl@ss 6.0	27260700
eCl@ss 7.0	27440102
eCl@ss 8.0	27440102
eCl@ss 9.0	27440103

ETIM

ETIM 4.0	EC002061
ETIM 5.0	EC002061
ETIM 6.0	EC002061

UNSPSC

UNSPSC 6.01	30211923
UNSPSC 7.0901	39121522
UNSPSC 11	39121522
UNSPSC 12.01	39121522
UNSPSC 13.2	39121413

Approvals

Approvals

Approvals

DNV GL / TÜV Rheinland / TÜV Rheinland / UL Listed / cUL Listed / EAC / EAC / cULus Listed

Ex Approvals

Approval details

DNV GL



<https://approvalfinder.dnvgl.com/>

TAE00002KM

Device connector, rear mounting - PRC 3-FT25-MC4-150 - 1409220

Approvals

TÜV Rheinland			http://www.certipedia.com	R 60117904-0002
Nominal voltage UN		690 V		
Nominal current IN		35 A		
mm²/AWG/kcmil		6		

TÜV Rheinland			http://www.certipedia.com	R 60117904-0001
Nominal voltage UN	500 V			
Nominal current IN	32 A			
mm²/AWG/kcmil	6			

UL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	E221474-20150513
Nominal voltage UN	600 V		
Nominal current IN	35 A		
mm²/AWG/kcmil	14-10		

cUL Listed			http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	E221474-20150513
Nominal voltage UN	600 V			
Nominal current IN	35 A			
mm²/AWG/kcmil	14-10			

EAC		B.01742	
-----	---	---------	--

Device connector, rear mounting - PRC 3-FT25-MC4-150 - 1409220

Approvals

EAC		B.00767
-----	---	---------

cULus Listed	
--------------	---

Accessories

Accessories

Protective cover

Protective cap - PRC COVER M - 1409237



Protective cap for 3 and 5-pos. PRC device plugs