


Network cable - NBC-R4AC/3,0-UTP GY/R4AC - 1413019

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Network cable, degree of protection: IP20, number of positions: 8, 1 Gbps, CAT5, cable outlet: straight, Ethernet

RoHS

IP20

Key Commercial Data

Packing unit	1 pc
Minimum order quantity	100 pc
GTIN	 4 046356 981491
GTIN	4046356981491
Weight per Piece (excluding packing)	80.000 g
Custom tariff number	85444210
Country of origin	China

Technical data

Ambient conditions

Degree of protection	IP20 (RJ45 connector)
Ambient temperature (operation)	-25 °C ... 80 °C (RJ45 connector)

General data

Rated current at 40°C	1 A
Rated voltage	48 V
Number of positions	8
Alternative short product description	Ethernet cable
Rated voltage (III/3)	72 V (DC)
Number of slots	1

Network cable - NBC-R4AC/3,0-UTP GY/R4AC - 1413019

Technical data

General data

Transmission characteristics (category)	CAT5
Transmission speed	up to 1 Gbps

Standards and Regulations


Flammability rating according to UL 94	V0
--	----

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values


Drawings

Schematic diagram



Connector pin assignment plug RJ45

Circuit diagram

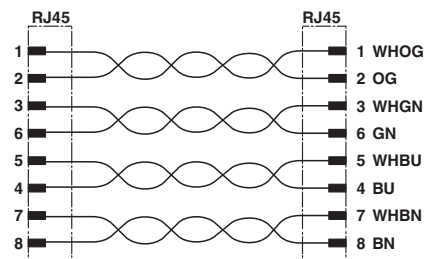

Contact assignment of RJ45 plugs

Classifications

eCl@ss

eCl@ss 10.0.1	27182702
eCl@ss 11.0	27182702
eCl@ss 4.0	27060300
eCl@ss 4.1	27060300
eCl@ss 5.0	27061800
eCl@ss 5.1	27061800
eCl@ss 6.0	27180800
eCl@ss 7.0	27182702
eCl@ss 9.0	27182702

ETIM

ETIM 4.0	EC001031
ETIM 6.0	EC001031
ETIM 7.0	EC001031

Network cable - NBC-R4AC/3,0-UTP GY/R4AC - 1413019

Classifications

UNSPSC

UNSPSC 13.2	31261501
UNSPSC 18.0	31261501
UNSPSC 19.0	31261501
UNSPSC 20.0	31261501
UNSPSC 21.0	31261501

Approvals

Approvals

Approvals

EAC / EAC-RoHS

Ex Approvals

Approval details

EAC		19060508
-----	---	----------

EAC-RoHS		B.00385/20
----------	---	------------