

Adapter - HC-B-TA-M25-ER-AL - 1414257

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Adapter, aluminum, for EVO housing, M25 thread



Key Commercial Data

Packing unit	1 STK
GTIN	 4 055626 022192
GTIN	4055626022192
Custom tariff number	85389099
Country of origin	Germany

Technical data

Dimensions

Length of internal thread	13 mm
---------------------------	-------

Ambient conditions

Degree of protection	4 (UL 50e)
	4X (UL 50e)
	12 (UL 50e)
Ambient temperature (operation)	-40 °C ... 125 °C

General

Material	Die-cast aluminum, corrosion-resistant
Housing material	Die-cast aluminum, corrosion resistant
Shielded	yes

Adapter - HC-B-TA-M25-ER-AL - 1414257


Technical data

General

Thread type on connection side	Bayonet B metal
Thread type on seal side	M25
Torque	12 Nm (Tightening torque of screw connection to be screwed in)

Drawings

Dimensional drawing

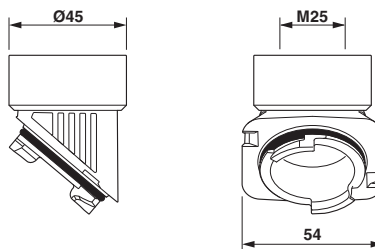

Dimensional drawing

Classifications

eCl@ss

eCl@ss 5.1	27143424
eCl@ss 6.0	27261207
eCl@ss 8.0	27440209
eCl@ss 9.0	27440209

ETIM

ETIM 5.0	EC002635
ETIM 6.0	EC002635

UNSPSC

UNSPSC 13.2	39121408
-------------	----------

Approvals

Approvals

Approvals

EAC / UL Recognized / cUL Recognized / cULus Recognized

Adapter - HC-B-TA-M25-ER-AL - 1414257

Approvals

Ex Approvals

Approval details

EAC		7500651.22.01.00246
UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm E255026
cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm E255026
cULus Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm