

Contact insert module - HC-M-02-AT-M-16 - 1417297

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



HEAVYCON contact insert module, pin, 2-pos. to 70 A, 16 mm² axial screw connection

Why buy this product

- ✓ Plug module is shock proof

RoHS

Key Commercial Data

Packing unit	1 STK
Minimum order quantity	2 STK
GTIN	 4 055626 112404
GTIN	4055626112404
Weight per Piece (excluding packing)	30.000 g
Custom tariff number	85366990
Country of origin	Poland

Technical data

Dimensions

Height	45 mm
Width	34.2 mm
Length	14.6 mm

Electrical characteristics

Note	For HEAVYCON HC-B6 to B48 housing, HC-M-MHR... hinged retaining frame required, axial connection for 2.5 mm Allen key
Rated voltage (III/3)	1000 V
Rated current	70 A

Contact insert module - HC-M-02-AT-M-16 - 1417297

Technical data

Electrical characteristics

Rated surge voltage	8 kV
Connection profile	2

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
---------------------------------	-------------------

Mechanical characteristics

Conductor cross section	6 mm² ... 25 mm² (The cross section specification refers to the geometric cross section of the cable used)
Connection cross section AWG	8 ... 6
Stripping length of the individual wire	11 mm +1 (6 mm² ... 16 mm²)
	12.5 mm +1 (25 mm²)
Tightening torque	2 Nm (6 mm²)
	3 Nm (10 mm² ... 25 mm²)
Wire diameter including insulation	8.9 mm
Hexagonal socket	SW2,5
Insertion/withdrawal cycles	≥ 500
Minimum housing height	72 mm

General

Series	HC-M-02
Color	light gray
Number of module slots	1
Connection method	Axial screw connection
Connection in acc. with standard	IEC / EN
Flammability rating according to UL 94	V0
Degree of pollution	3
Overvoltage category	III
Assembly instructions	Use 2.5 mm Allen wrenches for axial connection. Only for stranded wires. For housing heights h ≥ 52 mm. Plug-in connections may only be operated only when there is no load/voltage.
Connection	Note regarding axial connection technology: Only for stranded wires. The specified conductor cross sections refer to the geometric cross section of the cable used. Cables with a geometric cross section which deviates significantly from the nominal cable cross section must be checked before use. The axial connection technology connection space is designed for fine strand cables according to VDE 0295 Class 5. Deviating cable structures (e.g., Class 6 cables) must be checked before use. Assembly instructions Before assembly, ensure that the tapered screw is fully loosened (chamber is open). Cables must not be twisted. The wires must be pushed into the contact chamber as far as they will go (until the insulation touches the contact). Hold the wires in position and tighten using an Allen key. The used wire end must be cut off before reconnection. The terminal screw

Contact insert module - HC-M-02-AT-M-16 - 1417297

Technical data

General

	must only be retightened once to prevent the litz wires from breaking. To prevent damage to the contact, the wire/cable must be mechanically held at an appropriate distance from the connection point (e.g., when used in a plate cut out). For notes on correct execution, see DIN VDE 0100-520:2003-06. Unused connections must be tightened with maximum torque.
--	--

Material data


Contact material	Copper alloy
Contact surface material	Ag
Contact carrier material	PC

Standards and Regulations

Connection in acc. with standard	IEC / EN
Flammability rating according to UL 94	V0

Drawings


Schematic diagram




Connector pin assignment, connection side

Pin module

Dimensional drawing

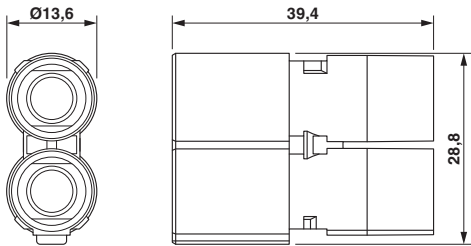


Diagram

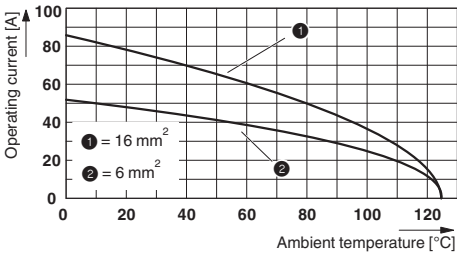

Derating diagram (6 modules in HC-B 24 housing)

Schematic diagram

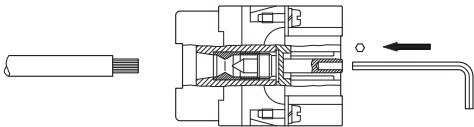

Axial screw connection

Contact insert module - HC-M-02-AT-M-16 - 1417297

Approvals

Approvals

Approvals

EAC / CSA / UL Recognized

Ex Approvals

Approval details

EAC		7500651.22.01.00246
-----	---	---------------------

CSA		http://www.csagroup.org/services/testing-and-certification/certified-product-listing/	13631
mm²/AWG/kcmil		6	
Nominal current I _N		54 A	
Nominal voltage U _N		600 V	

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	E118976
mm²/AWG/kcmil		6	
Nominal current I _N		69 A	
Nominal voltage U _N		600 V	