

RJ45 socket insert - CUC-F-J1ZNI-S/R4IDC8 - 1418984

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



RJ45 socket insert, Degree of protection: IP20, Number of positions: 8, 10 Gbps, CAT6_A, Material: Zinc die-cast, Connection method: IDC connection, Connection cross section: AWG 26-22

Product Description

Freenet system

Why buy this product

- ✓ assembly without special tools
- ✓ Compact design
- ✓ Rugged design



Key Commercial Data

Packing unit	1 STK
GTIN	 4 055626 251431
GTIN	4055626251431
Weight per Piece (excluding packing)	20.000 g
Custom tariff number	85366990
Country of origin	Poland

Technical data

Mechanical characteristics

Number of positions	8
Number of slots	1
Connection profile	RJ45
Insertion/withdrawal cycles	≥ 750

RJ45 socket insert - CUC-F-J1ZNI-S/R4IDC8 - 1418984

Technical data

Mechanical characteristics

Connection method	IDC connection
Connection cross section AWG	26 ... 22 (solid)
	26 ... 22 (stranded)
External cable diameter	4.5 mm ... 9 mm
Wire diameter	0.4 mm ... 0.65 mm
Wire diameter including insulation	0.8 mm ... 1.6 mm
Insulation resistance	> 500 MΩ (100 V DC)
Degree of protection	IP20

Ambient conditions

Ambient temperature (operation)	-10 °C ... 60 °C
Ambient temperature (storage/transport)	-40 °C ... 70 °C
Degree of protection	IP20

Material data

Housing material	Zinc die-cast
Contact carrier material	PC
Contact material	CuSn
Contact surface material	Gold over nickel

Electrical characteristics

Number of positions	8
GRP transmission properties	CAT6 _A
Transmission speed	10 Gbps
Frequency range	500 MHz
Rated voltage (III/3)	1000 V DC


Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

RJ45 socket insert - CUC-F-J1ZNI-S/R4IDC8 - 1418984

Dimensional drawing

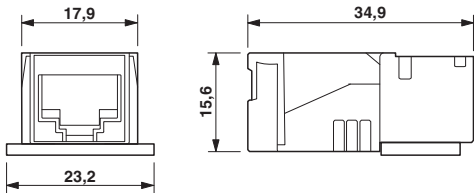

RJ45 socket insert, Freenet system

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / EAC / cULus Recognized

Ex Approvals

Approval details

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 335024
cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 335024
EAC			B.01742
cULus Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	