

Housing - HC-STA-D50-BWD-ELC-AL - 1424412

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid
(<http://phoenixcontact.com/download>)



Panel mounting base D50, With double locking latch, Material: Die-cast aluminum, salt water resistant, Height: 32 mm, Cable gland: none, Gland: no, Standard, with flat gasket

Why buy this product

- ☒ good shielding in the event of electromagnetic interference



Key Commercial Data

Packing unit	1
GTIN	 4 055626 371528
GTIN	4055626371528

Technical data

Dimensions

Height	32 mm
Width	65 mm
Length	102 mm

Ambient conditions

Degree of protection of housing (IP)	IP66
	IP67
Degree of protection of housing (NEMA)	4 (UL 50e)
	4X (UL 50e)
	12 (UL 50e)
Ambient temperature (operation)	-40 °C ... 125 °C

General

Housing - HC-STA-D50-BWD-ELC-AL - 1424412


Technical data

General

Size	D50
Housing type	Panel mounting base
Color	silver
Locking type	With double locking latch
Screw connection	none
Housing material	Die-cast aluminum, salt water resistant
Housing surface material	Uncoated
Material lock	PA

Drawings

Dimensional drawing

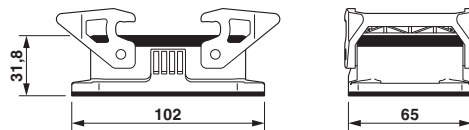

Dimensional drawing

Classifications

eCl@ss

eCl@ss 5.1	27143424
eCl@ss 6.0	27261203
eCl@ss 7.0	27440202
eCl@ss 8.0	27440202
eCl@ss 9.0	27440202

ETIM

ETIM 5.0	EC000437
----------	----------