

Contact insert - SACC-CI-M12FS-5CON - 1528536

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Sensor/actuator flush-type socket, 5-pos., M12 contact carrier, A-coded, with straight solder connection



Key Commercial Data

Packing unit	1 pc
Minimum order quantity	100 pc
Weight per Piece (excluding packing)	1.43 g
Custom tariff number	85366990
Country of origin	Poland

Technical data

Ambient conditions

Degree of protection	IP67
----------------------	------

General

Rated current at 40°C	4 A
Rated voltage	60 V
Number of positions	5
Coding	A - standard
Status display	No
Degree of pollution	3

Material

Contact material	CuZn
Contact surface material	Au
Sealing material	FKM

Standards and Regulations

Contact insert - SACC-CI-M12FS-5CON - 1528536

Technical data

Standards and Regulations

Connection in acc. with standard	CUL
----------------------------------	-----

Classifications

eCl@ss

eCl@ss 4.0	27140815
eCl@ss 4.1	27140815
eCl@ss 5.0	27143423
eCl@ss 5.1	27143423
eCl@ss 6.0	27143423
eCl@ss 7.0	27449001
eCl@ss 8.0	27440103

ETIM

ETIM 2.0	EC001297
ETIM 3.0	EC002061
ETIM 4.0	EC002061
ETIM 5.0	EC002061

UNSPSC

UNSPSC 6.01	31251501
UNSPSC 7.0901	31251501
UNSPSC 11	31251501
UNSPSC 12.01	31251501
UNSPSC 13.2	31251501

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized

Ex Approvals

Approvals submitted

Contact insert - SACC-CI-M12FS-5CON - 1528536

Approvals


Approval details

UL Recognized 


cUL Recognized 

Drawings

Drilling diagram




Dimensional drawing




Installation diagram

Schematic diagram



Dimensional drawing

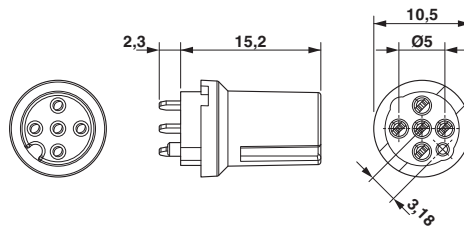

Pin assignment M12 socket, 5-pos., A-coded,
socket side view