

Y distributor - SAC-3P-M12Y/2XM12FS B PE - 1683413

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Y distributor, 4-position, Plug straight M12, A-coded, on Socket straight M12, A-coded, PIN 2+4 bridged and Socket straight M12, A-coded, PIN 2+4 bridged



Key Commercial Data

Packing unit	1 pc
Minimum order quantity	5 pc
GTIN	 4 017918 164171
Weight per Piece (excluding packing)	28.89 g
Custom tariff number	85366990
Country of origin	Poland

Technical data

Dimensions

Center distance	18 mm
-----------------	-------

Ambient conditions

Ambient temperature (operation)	-25 °C ... 90 °C (Plug / socket)
Degree of protection	IP65
	IP67

General

Note	with center distance of 18 mm, suitable for molded connectors and unshielded connectors that can be assembled with QUICKON IDC terminal block connection technology and a connection range of 0.14 mm² to 0.34 mm²
Rated current at 40°C	4 A
Rated voltage	60 V

Y distributor - SAC-3P-M12Y/2XM12FS B PE - 1683413

Technical data

General

Number of positions	4
Insulation resistance	$\geq 100 \text{ M}\Omega$
Coding	A - standard
Standards/regulations	M12 connector IEC 61076-2-101
Status display	No
Overvoltage category	II
Degree of pollution	3
Insertion/withdrawal cycles	≥ 100
Torque	0.4 Nm (M12 connector)

Material

Flammability rating according to UL 94	HB
Contact material	CuZn
Contact surface material	Ni/Au
Contact carrier material	TPU GF
Material of grip body	TPU, hardly inflammable, self-extinguishing
Material, knurls	Zinc die-cast, nickel-plated
Sealing material	NBR

Cable

Standards and Regulations

Standard designation	M12 connector
Standards/regulations	IEC 61076-2-101
Flammability rating according to UL 94	HB

Classifications

eCl@ss

eCl@ss 4.0	27060306
eCl@ss 4.1	27060306
eCl@ss 5.0	27061801
eCl@ss 5.1	27061801
eCl@ss 6.0	27061801
eCl@ss 7.0	27061801
eCl@ss 8.0	27440104
eCl@ss 9.0	27440106

Y distributor - SAC-3P-M12Y/2XM12FS B PE - 1683413

Classifications

ETIM

ETIM 2.0	EC000830
ETIM 3.0	EC001856
ETIM 4.0	EC002585
ETIM 5.0	EC002062

UNSPSC

UNSPSC 6.01	31251501
UNSPSC 7.0901	31251501
UNSPSC 11	31251501
UNSPSC 12.01	31251501
UNSPSC 13.2	31251501

Approvals

Approvals

Approvals

EAC / EAC

Ex Approvals

Approvals submitted

Approval details


EAC

EAC

Drawings


Y distributor - SAC-3P-M12Y/2XM12FS B PE - 1683413

Schematic diagram




Pin assignment M12 male connector, 5-pos., A-coded, male side

Schematic diagram




Connector pin assignment M12 socket, 3-pos., bridged, with PE, A-coded, female side view

Dimensional drawing

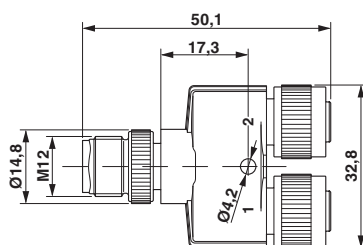


M12 Y distributor

Circuit diagram



Contact assignment of the M12 Y distributor

Schematic diagram

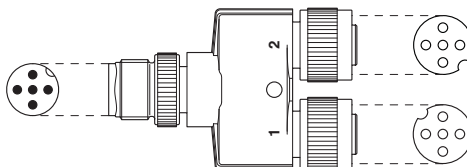

Layout of connector pin assignments