

Panel feed-through terminal block - TW 50/ 1-CL - 1708744

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid
(<http://phoenixcontact.com/download>)



Panel feed-through terminal block, Connection method: T-LOX knee lever connection, Cable lug connection, Number of positions: 1, Load current : 150 A, Cross section: 10 mm² - 50 mm², Connection direction of the conductor to plug-in direction: 0 °, Width: 38 mm, Color: gray

Why buy this product

- ✓ Lever actuation enables time-saving and smooth connection of large conductors
- ✓ Defined contact force ensures that contact remains stable over the long term
- ✓ 90° open clamping space allows the conductor to be conveniently swiveled
- ✓ Quick, tool-free mounting on the housing wall using a fixing wedge



Key Commercial Data

Packing unit	1 STK
Minimum order quantity	10 STK
GTIN	 4 055626 020310
GTIN	4055626020310
Weight per Piece (excluding packing)	180.000 g
Custom tariff number	85369010
Country of origin	Germany

Technical data

General

Number of levels	1
Number of connections	2
Nominal cross section	50 mm²
Color	gray
Insulating material	PA

Panel feed-through terminal block - TW 50/ 1-CL - 1708744

Technical data

General

Flammability rating according to UL 94	V0
Insulating material group	I
Nominal current I_N	150 A
Maximum load current	150 A
Nominal voltage U_N	1000 V
Number of positions	1

Dimensions

Width	38 mm
Plate thickness	1 mm ... 5 mm

Connection data

Connection side	Level 1 ext. 1
Connection method	T-LOX knee lever connection
Conductor cross section solid min.	10 mm ²
Conductor cross section solid max.	50 mm ²
Conductor cross section flexible min.	16 mm ²
Conductor cross section flexible max.	50 mm ²
Conductor cross section flexible, with ferrule without plastic sleeve min.	10 mm ²
Conductor cross section flexible, with ferrule without plastic sleeve max.	50 mm ²
Conductor cross section flexible, with ferrule with plastic sleeve min.	10 mm ²
Conductor cross section flexible, with ferrule with plastic sleeve max.	50 mm ²
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min.	6 mm ²
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max.	16 mm ²
Connection side	Inside
Connection method	Cable lug connection

Standards and Regulations

Flammability rating according to UL 94	V0
--	----


Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings


Panel feed-through terminal block - TW 50/ 1-CL - 1708744

Drilling diagram

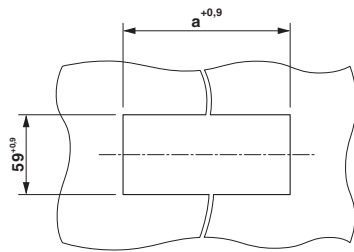


Dimension a = 29 mm

Diagram

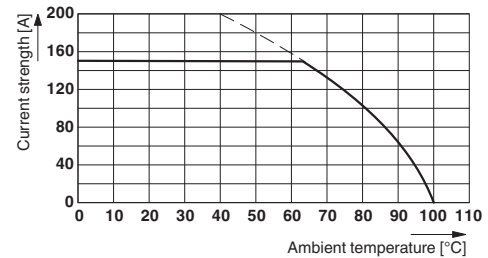

Dimensional drawing

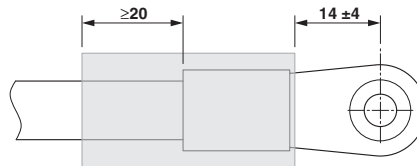

Electric strength > 19.7 kV/mm (IEC243), min. Wall thickness, fully shrunk ≥ 0.5 mm

Approvals

Approvals

Approvals

EAC / cULus Recognized / VDE approval of drawings

Ex Approvals

Approval details

EAC

EAC

B.01742

Panel feed-through terminal block - TW 50/ 1-CL - 1708744

Approvals

cULus Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	E60425-20160914
		C	
mm²/AWG/kcmil		8-1/0	
Nominal current I _N		150 A	
Nominal voltage U _N		600 V	

VDE approval of drawings		http://www.vde.com/en/Institute/OnlineService/VDE-approved-products/Pages/Online-Search.aspx	40045667
mm²/AWG/kcmil		10-50	
Nominal current I _N		150 A	
Nominal voltage U _N		1000 V	