

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



DIN rail housing, Upper part, Without connection opening, with vents, width: 35.1 mm, color: black (9005)

#### Your advantages

- Item is part of the EH product range
- ▼ Tool-free mounting
- Available in overall widths from 22.5 mm ... 90 mm
- ✓ Inflammability class HB acc. to UL 94
- ✓ Variety of connection technologies
- ☑ Can be mounted on the DIN rail or the wall



## **Key Commercial Data**

| Packing unit                         | 1 pc            |
|--------------------------------------|-----------------|
| Minimum order quantity               | 10 pc           |
| GTIN                                 | 4 046356 912082 |
| GTIN                                 | 4046356912082   |
| Weight per Piece (excluding packing) | 20.000 g        |
| Custom tariff number                 | 85472000        |
| Country of origin                    | India           |

## Technical data

#### Item properties

| Brief article description | Upper part of housing   |
|---------------------------|-------------------------|
| Туре                      | EH 35 F-C CS/ABS BK9005 |
| Order No.                 | 2201833                 |



## Technical data

#### Item properties

| Housing type                 | DIN rail housing |
|------------------------------|------------------|
| Housing series               | EH               |
| Туре                         | Upper part       |
| Max. IP code to attain       | IP20             |
| Mounting type                | Snap in          |
| Ventilation openings present | yes              |

#### **Dimensions**

| Width [ w ]  | 35.1 mm  |
|--------------|----------|
| Height [ h ] | 74.65 mm |
| Depth [ d ]  | 36.95 mm |

#### Material data

| Color (RAL)                            | black (9005) |
|----------------------------------------|--------------|
| Flammability rating according to UL 94 | НВ           |
| Housing material                       | ABS          |

#### Ambient conditions

| Ambient temperature (storage/transport) | -40 °C 55 °C                                  |
|-----------------------------------------|-----------------------------------------------|
| Ambient temperature (assembly)          | -5 °C 80 °C                                   |
| Ambient temperature (operation)         | -40 °C 80 °C (depending on power dissipation) |

## Packaging information

| Pieces per package         | 10   |
|----------------------------|------|
| Denomination packing units | Pcs. |

#### Standards and regulations

| Flammability rating according to UL 94 | НВ |
|----------------------------------------|----|


#### **Environmental Product Compliance**

| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|------------|---------------------------------------------------------|
|            | No hazardous substances above threshold values          |

# Drawings



Dimensional drawing

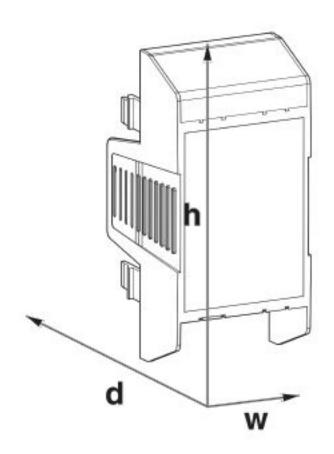

## Classifications

# eCl@ss

| eCl@ss 5.0 | 27180500 |
|------------|----------|
| eCl@ss 5.1 | 27180500 |
| eCl@ss 6.0 | 27180800 |
| eCl@ss 7.0 | 27182702 |
| eCl@ss 8.0 | 27182702 |
| eCl@ss 9.0 | 27182702 |



# Classifications

#### **ETIM**

| ETIM 4.0 | EC001031 |
|----------|----------|
| ETIM 5.0 | EC001031 |
| ETIM 6.0 | EC001031 |
| ETIM 7.0 | EC001031 |

## **UNSPSC**

| UNSPSC 13.2 | 31261501 |
|-------------|----------|

Phoenix Contact 2019 © - all rights reserved http://www.phoenixcontact.com