

Interface module - FLKM-D37 SUB/S/LA - 2281652

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE module, with screw connection and D-Subminiature pin strip, for mounting on NS 35/7.5 or NS 32, with light indicator, 37-pos.



Key Commercial Data

Packing unit	1 STK
GTIN	 4 017918 054908
GTIN	4017918054908
Weight per Piece (excluding packing)	242.900 g
Custom tariff number	85369010
Country of origin	Germany

Technical data

Dimensions

Width	112.5 mm
Height	77 mm
Depth	58.5 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

General

Max. perm. operating voltage	24 V DC
Max. perm. current (per branch)	2.5 A
Number of positions	37

Interface module - FLKM-D37 SUB/S/LA - 2281652

Technical data

General

Status display	LED
Mounting position	any

Connection data for connection 1

Connection name	Field level
Connection in acc. with standard	IEC / EN
Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section solid	0.2 mm² ... 4 mm²
Conductor cross section flexible	0.2 mm² ... 2.5 mm²
Conductor cross section AWG	24 ... 12


Standards and Regulations

Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103
Degree of pollution	2
Overvoltage category	II

Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

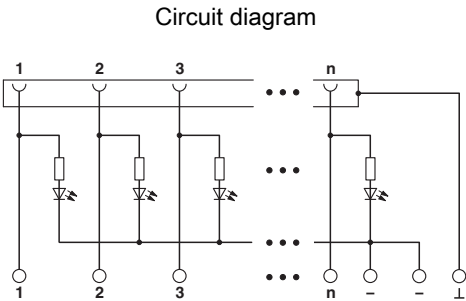

Schematic
diagram

Approvals

Approvals

Interface module - FLKM-D37 SUB/S/LA - 2281652

Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC EAC-Zulassung

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>