

Interface module - VIP-3/SC/HD62SUB/M - 2322391

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE module, with screw connection and high density D-SUB miniature pin strip, for mounting on NS 35 rails, no. of pos.: 62, width: 180 mm

The illustration shows a 44-position version

Why buy this product

- ☒ Screw connection
- ☒ 1:1 connection



Key Commercial Data

Packing unit	1 STK
Weight per Piece (excluding packing)	320.000 g
Custom tariff number	85369010
Country of origin	United States

Technical data

Dimensions

Width	113.5 mm
Height	69 mm
Depth	62 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

General

Max. perm. operating voltage	125 V AC/DC
Max. perm. current (per branch)	1 A

Interface module - VIP-3/SC/HD62SUB/M - 2322391

Technical data

General

Number of positions	62
Status display	No
Mounting position	any

Connection data for connection 1

Connection name	Field level
Connection in acc. with standard	IEC / EN
Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section solid	0.2 mm ² ... 4 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 12
Number of positions	62

Connection data for connection 2



Connection name	Controller level
Connection method	High density D-SUB pin strip
Number of connections	1
Number of positions	62

Standards and Regulations

Connection in acc. with standard	CUL
Standards/regulations	EN 50178

Drawings

Interface module - VIP-3/SC/HD62SUB/M - 2322391

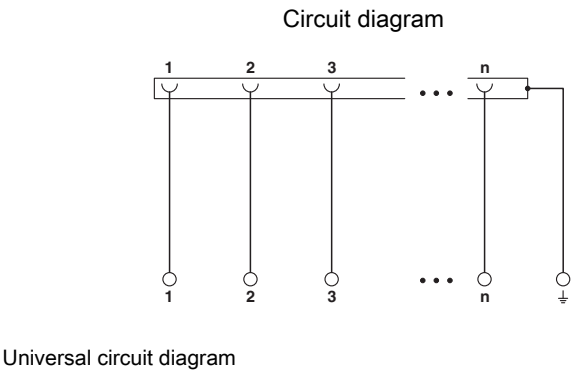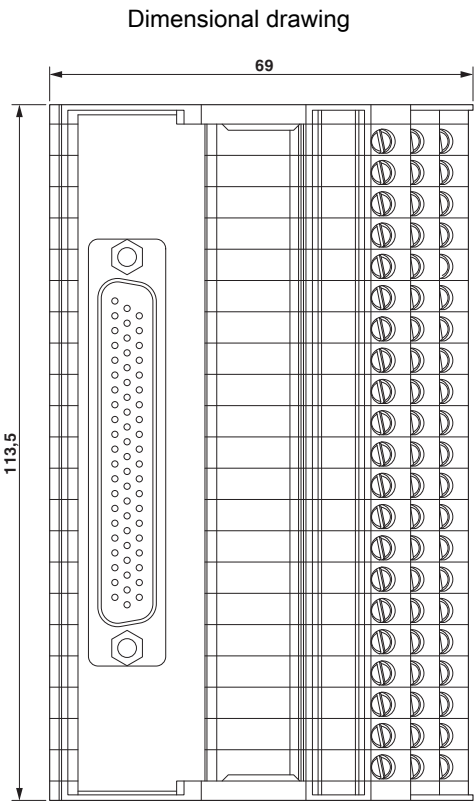

Approvals

Approvals

Approvals

cUL Recognized / UL Recognized / EAC / EAC / EAC / cULus Recognized

Ex Approvals

Approval details

cUL Recognized  http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm FILE E 238705	
mm²/AWG/kcmil	30-12
Nominal current I _N	1 A

Interface module - VIP-3/SC/HD62SUB/M - 2322391

Approvals

Nominal voltage UN	125 V
--------------------	-------

UL Recognized  http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm FILE E 238705	
mm²/AWG/kcmil	30-12
Nominal current IN	1 A
Nominal voltage UN	125 V

EAC EAC-Zulassung

EAC 7500651.22.01.00246

EAC RU C-DE.A*30.B.01742

cULus Recognized  http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm
--