

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



Housing cover,for connection on both sides

The figure shows a fully mounted version of the electronic housing

#### Your advantages

- ▼ Tool-free mounting
- ✓ Practical and easy-to-wire conductor connection using extra finely stranded sturdy screw terminal blocks up to 2.5 mm²
- Fast snap-on mounting on symmetrical DIN rails according to EN 60715
- ☑ Date of manufacture and material and part identification embossed on the housing (recyclability)
- Functional and industry-oriented housing technology
- Optimum accommodation of electronic components with graded pitches with a design width of 22.5 mm, 45 mm, 67.5 mm, and 90 mm
- Shock and contamination-proof accommodation of electronic components (IP40 housing, IP20 terminal blocks)



### **Key Commercial Data**

Packing unit	1 pc
Minimum order quantity	10 pc
GTIN	4 017918 099503
GTIN	4017918099503
Weight per Piece (excluding packing)	13.410 g
Custom tariff number	85389099
Country of origin	Poland

### Technical data

#### General

Housing type	Component housing



### Technical data


#### General

Housing material	ABS
Color (RAL)	green
Ambient conditions	
Ambient temperature (operation)	80 °C
Dimensions	
Length	75 mm
Height	17.5 mm
Width	67.5 mm
Depth	75 mm
Technical data	
Number of positions	26
Standards and Regulations	
Flammability rating according to UL 94	НВ
Environmental Product Compliance	
China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

### Drawings




Dimensional drawing

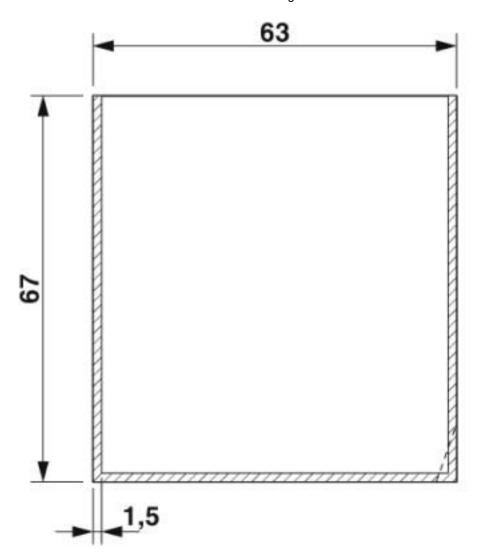

valid for PCB 1; 2; 3; 4; 5 und 6, see explosion drawing




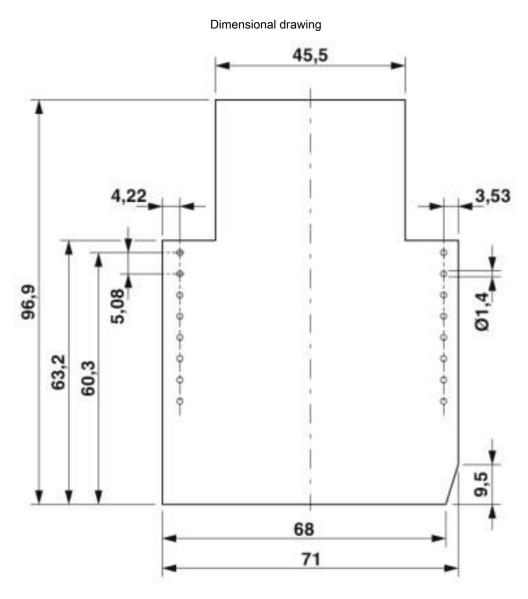

Component mounting side, if the double-level upper part is used




Dimensional drawing

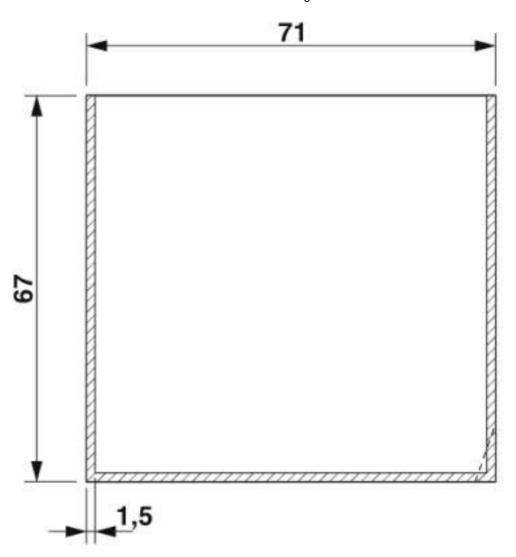



valid for PCB 7; 8; 11 and 12, see explosion drawing



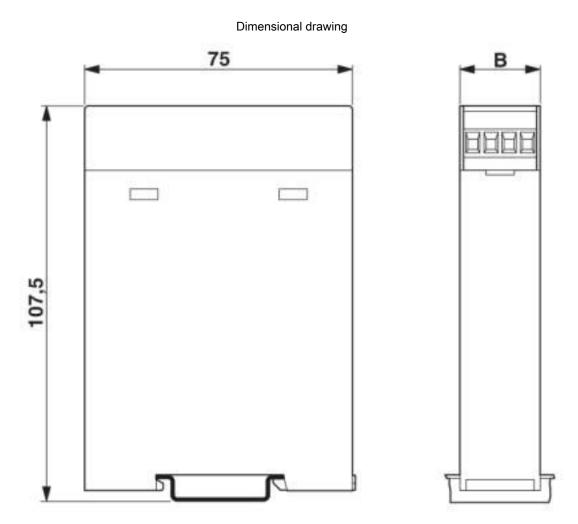





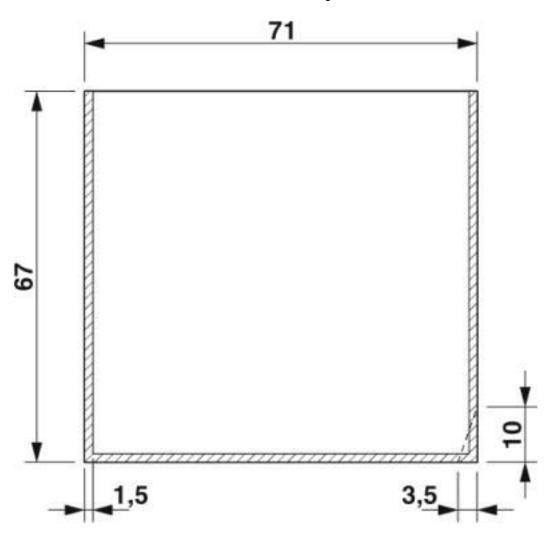

valid for PCB 9, see explosion drawing

### Classifications

### eCl@ss

eCl@ss 10.0.1	27182702
eCl@ss 4.0	27180400
eCl@ss 4.1	27180400
eCl@ss 5.0	27180500
eCl@ss 5.1	27180500
eCl@ss 6.0	27180800



### Classifications

### eCl@ss

eCl@ss 7.0	27182702
eCl@ss 8.0	27182702
eCl@ss 9.0	27182702

#### **ETIM**

ETIM 2.0	EC001031
ETIM 3.0	EC001031
ETIM 4.0	EC001031
ETIM 5.0	EC001031
ETIM 6.0	EC001031
ETIM 7.0	EC001031

#### **UNSPSC**

UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501
UNSPSC 18.0	31261501
UNSPSC 19.0	31261501
UNSPSC 20.0	31261501
UNSPSC 21.0	31261501

### Approvals

Approvals

Approvals

**UL** Recognized

Ex Approvals

#### Approval details

**UL** Recognized



http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm

FILE E 240868



Phoenix Contact 2020 © - all rights reserved http://www.phoenixcontact.com