

Inline terminal - IB IL 24 PWR IN-PAC - 2861331

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Inline power terminal, complete with accessories (connector and labeling field), 24 V DC, without fuse

The illustration shows the version IB IL 24 PWR IN/F-PAC

Product Features

- Supply of the 24 V main voltage UM
- Provision of the 24 V segment voltage US
- Main circuit protected by an external fuse
- Diagnostic and status indicators



Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	78.0 g
Custom tariff number	85389099
Country of origin	Germany

Technical data

Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

Dimensions

Width	12.2 mm
Height	119.8 mm
Depth	71.5 mm

Interfaces

Connection method	Inline data jumper
Interface	Inline local bus

Inline terminal - IB IL 24 PWR IN-PAC - 2861331

Technical data

Power supply

Communications power U_L	7.5 V DC (via voltage jumper)
----------------------------	-------------------------------

General

Type of protection	Surge protection
Protective circuit/component	Suppressor diode
Weight	59 g
Number of plugs	1

Inline potentials

Communications power U_L	7.5 V DC $\pm 5\%$ (via voltage jumper)
Main circuit supply U_M	24 V DC (nominal value)
Supply voltage range U_M	19.2 V ... 30 V (including all tolerances, including ripple)
Power supply at U_M	max. 8 A (Sum of $U_M + U_S$; 4 A, maximum, when used in potentially explosive areas.)
Segment circuit supply U_S	24 V DC
Power supply at U_S	max. 8 A (Sum of $U_M + U_S$; 4 A, maximum, when used in potentially explosive areas.)

Standards and Regulations

Test section	5 V supply, incoming remote bus/7.5 V supply (bus logics) 500 V AC 50 Hz 1 min.
	5 V supply, outgoing remote bus/7.5 V supply (bus logics) 500 V AC 50 Hz 1 min.
	7.5 V supply (bus logics)/24 V supply (I/O) 500 V AC 50 Hz 1 min.
	24 V supply (I/O) / functional earth ground 500 V AC 50 Hz 1 min.
Connection in acc. with standard	CUL

Classifications

eCl@ss

eCl@ss 4.0	27250315
eCl@ss 4.1	27250304
eCl@ss 5.0	27250304
eCl@ss 5.1	27242610
eCl@ss 6.0	27242610
eCl@ss 7.0	27242610
eCl@ss 8.0	27242610

ETIM

ETIM 2.0	EC001433
----------	----------

Inline terminal - IB IL 24 PWR IN-PAC - 2861331

Classifications

ETIM

ETIM 3.0	EC001600
ETIM 4.0	EC001600
ETIM 5.0	EC001600

UNSPSC

UNSPSC 6.01	43172015
UNSPSC 7.0901	43201404
UNSPSC 11	43172015
UNSPSC 12.01	43201404
UNSPSC 13.2	43201404

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / LR / BV / ABS / RINA / BSH / BSH / EAC / cULus Recognized

Ex Approvals

UL Listed / cUL Listed / ATEX / cULus Listed

Approvals submitted

Approval details

UL Recognized 

cUL Recognized 
--

LR

BV


Inline terminal - IB IL 24 PWR IN-PAC - 2861331

Approvals


ABS
RINA
BSH
BSH
EAC
cULus Recognized 

Drawings

Block diagram

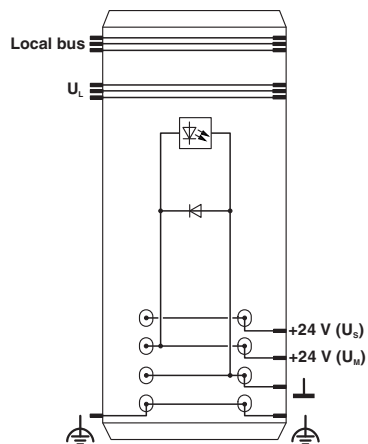

Connection diagram



Internal wiring of the terminal points

Inline terminal - IB IL 24 PWR IN-PAC - 2861331

Dimensional drawing

