

Wireless module - RAD-ISM-900-TX - 2867076

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Transmitter as replacement device, for unidirectional, wireless 900 MHz transmission system (America)



Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	149.0 g
Custom tariff number	85176990
Country of origin	Canada

Technical data

Note

Trade restriction	The products are offered exclusively for export outside the EU and the European Economic Area.
-------------------	--

Dimensions

Width	17.5 mm
Height	99 mm
Depth	114.5 mm

Ambient conditions

Ambient temperature (operation)	-40 °C ... 70 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Degree of protection	IP20

Wireless set

Set contents	Transmitter
--------------	-------------

Wireless path

Wireless module - RAD-ISM-900-TX - 2867076

Technical data

Wireless path

Direction	Uni-directional
Frequency range	902 MHz ... 928 MHz
Number of channel groups	4
Number of channels per group	63
Transmission power	1 W

Analog input (sender)

Description of the input	Current input (analog input)
Current input signal	4 mA ... 0.02 A
Input resistance current input	< 150 Ω

Digital input (sender)

Input voltage range	5 V AC/DC ... 30 V AC/DC
Switching threshold "0" signal, voltage	max. 1.5 V DC
Switching threshold "1" signal voltage	min. 5 V DC

Supply (sender)

Supply voltage	24 V DC
Supply voltage range	12 V DC ... 30 V DC
Typical current consumption	75 mA
Max. current consumption	350 mA

General

Mounting position	any
Assembly instructions	NS 35 in acc. with EN 60715
Housing material	Polyamide PA non-reinforced
Conformance	FCC Directive, Part 15.247
	ISC Directive RSS 210
UL, USA / Canada	Class I, Div. 2, Groups A, B, C, D

Connection data

Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section flexible min.	0.2 mm ²
Conductor cross section flexible max.	2.5 mm ²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	14
Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3

Wireless module - RAD-ISM-900-TX - 2867076

Technical data

Standards and Regulations

Electromagnetic compatibility	FCC Part 15.247 / ISC RSS 210
Conformance	FCC Directive, Part 15.247
	ISC Directive RSS 210
UL, USA / Canada	Class I, Div. 2, Groups A, B, C, D

Classifications

eCl@ss

eCl@ss 4.0	27250312
eCl@ss 4.1	27250312
eCl@ss 5.0	27242208
eCl@ss 5.1	27242208
eCl@ss 6.0	27242208
eCl@ss 7.0	27242208
eCl@ss 8.0	19179290

ETIM

ETIM 2.0	EC000310
ETIM 3.0	EC000310
ETIM 4.0	EC000310
ETIM 5.0	EC000310


UNSPSC

UNSPSC 6.01	30211506
UNSPSC 7.0901	43223108
UNSPSC 11	39121008
UNSPSC 12.01	43223108
UNSPSC 13.2	43223108

Drawings

Wireless module - RAD-ISM-900-TX - 2867076

Block diagram

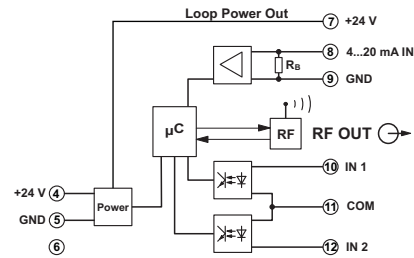

Transmitter module