

Input/output module - IOA FEED-THRU/EX - 2906598

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VIP field termination assemblies (FTA) with input/output accessories (IOA) provide universal channel configuration for applications seeking to evolve from a traditional fixed I/O approach. Direct feed through of field signals, 30 V, 1 A maximum.

Your advantages

- ☒ Two-stage progressive release

RoHS

Key Commercial Data

Packing unit	1 pc
GTIN	 4 055626 171784
GTIN	4055626171784
Weight per Piece (excluding packing)	10.000 g
Custom tariff number	85369010
Country of origin	United States

Technical data

Dimensions

Width	10.3 mm
Height	64.2 mm
Depth	72.9 mm

Ambient conditions

Ambient temperature (operation)	-40 °C ... 75 °C
Ambient temperature (storage/transport)	-40 °C ... 75 °C
Permissible humidity (operation)	0 % ... 95 % (non-condensing)
Degree of protection	IP20

Input/output module - IOA FEED-THRU/EX - 2906598

Technical data

General

Nominal voltage U_N	24 V DC
Max. operating voltage U_{max}	30 V
Max. operating voltage	30 V
Max. perm. current (per branch)	1 A
Max. permissible current	1 A
Number of positions	1
Status display	No
Mounting position	any
Degree of protection	IP20

Safety data

Input voltage U_i	30 V
Input current I_i	1 A
Inductance L_i	0 mH
Capacitance C_i	0 μ F
Max. output voltage U_o	U_i
Max. output current I_o	I_i
Max. output power P_o	P_i
ATEX	Sira 16ATEX4260X; Ex II 3G Ex nA ic IIC T4 Gc; Ex nA IIC T4 Gc
IECEX	IECEX SIR 16.0088X Ex nA ic IIC T4 Gc; Ex nA IIC T4 Gc
FM approval	Class I, Zone 2, AEx nA ic IIC T4 Gc; AEx nA IIC T4 Gc Nonincendive: Class I, Div. 2, Groups A, B, C, D T4 With connection to Class I, II, and III, Div. 2, Groups A, B, C, D, E, F, G

Connection data

Connection name	Control circuits
Connection method	Pin strip
Number of connections	1
Number of positions	13

Standards and Regulations

Standards/regulations	IEC 60664
	DIN EN 50178
Flammability rating according to UL 94	V0
Conformance	ANSI/ISA 60079-0; 60079-11; 60079-15
	ANSI/IEC 60529
	FM 3600; 3611; 3810
ATEX	Sira 16ATEX4260X; Ex II 3G

Input/output module - IOA FEED-THRU/EX - 2906598

Technical data

Standards and Regulations


	Ex nA ic IIC T4 Gc; Ex nA IIC T4 Gc
IECEX	IECEX SIR 16.0088X Ex nA ic IIC T4 Gc; Ex nA IIC T4 Gc

Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"


Drawings

Dimensional drawing

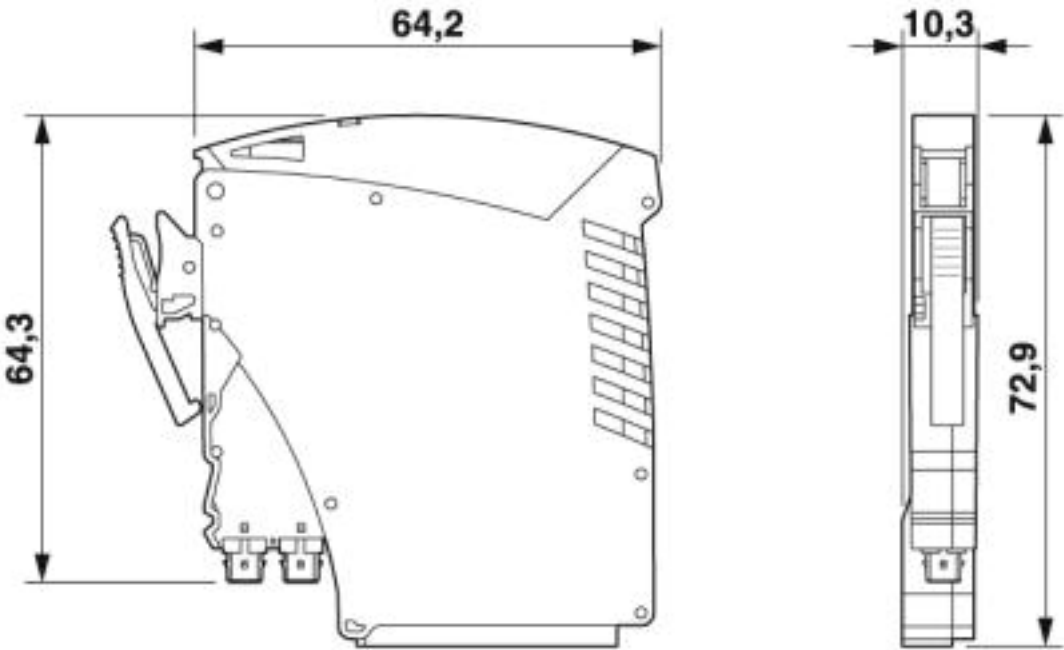

Input/output module - IOA FEED-THRU/EX - 2906598

Circuit diagram

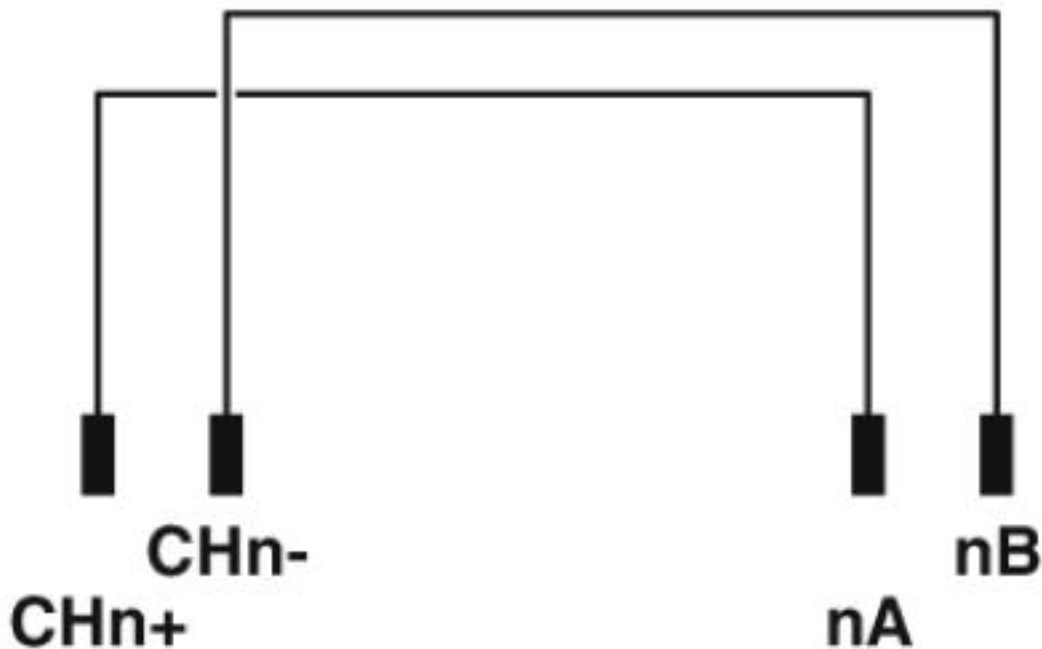

Classifications

eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27250313
eCl@ss 5.1	27250313
eCl@ss 6.0	27242600
eCl@ss 7.0	27141152
eCl@ss 8.0	27141152
eCl@ss 9.0	27141152

ETIM

ETIM 4.0	EC002780
ETIM 5.0	EC002780
ETIM 6.0	EC002780
ETIM 7.0	EC002780

Approvals

Approvals



Input/output module - IOA FEED-THRU/EX - 2906598

Approvals

Approvals

Functional Safety

Ex Approvals

IECEEx / ATEX / FM approved / UL Listed / cUL Listed / CSA / CSAus / cULus Listed / cCSAus

Approval details

Functional Safety	PHO 1609035 C001
-------------------	------------------