

## Thermomagnetic device circuit breaker - TMC 81C 05A - 2907562

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Thermomagnetic device circuit breaker, number of positions: 1, width: 17.6 mm, mounting type: DIN rail: 35 mm, Color: gray

RoHS

### Key Commercial Data

|                                      |           |
|--------------------------------------|-----------|
| Packing unit                         | 1 STK     |
| Weight per Piece (excluding packing) | 150.000 g |
| Country of origin                    | China     |

### Technical data

#### General

|                     |                 |
|---------------------|-----------------|
| Mounting type       | DIN rail: 35 mm |
| Color               | gray            |
| Number of positions | 1               |

#### Electrical data

|                                                 |            |
|-------------------------------------------------|------------|
| Operating voltage                               | 277 V AC   |
|                                                 | 60 V DC    |
| Rated current $I_N$                             | 5 A        |
| Rated short-circuit switching capacity $I_{cn}$ | 10 kA (IC) |

#### Dimensions

|        |         |
|--------|---------|
| Height | 116 mm  |
| Width  | 17.6 mm |
| Depth  | 65.7 mm |

#### Ambient conditions

|                                 |                  |
|---------------------------------|------------------|
| Ambient temperature (operation) | -35 °C ... 70 °C |
|---------------------------------|------------------|

# Thermomagnetic device circuit breaker - TMC 81C 05A - 2907562


## Technical data

### Standards and Regulations


|                          |                    |
|--------------------------|--------------------|
| Standards/specifications | UL 489 IEC 60947-2 |
|--------------------------|--------------------|

## Drawings

Diagram



Dimensional drawing

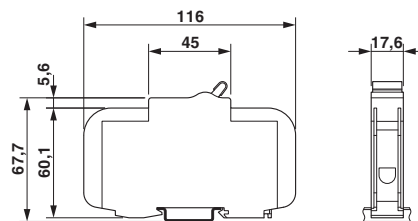

## Classifications

### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27141116 |
| eCl@ss 4.1 | 27141116 |
| eCl@ss 5.0 | 27141116 |
| eCl@ss 5.1 | 27141116 |
| eCl@ss 6.0 | 27141116 |
| eCl@ss 7.0 | 27141116 |
| eCl@ss 8.0 | 27141116 |
| eCl@ss 9.0 | 27141116 |

### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC000899 |
| ETIM 4.0 | EC000899 |
| ETIM 5.0 | EC000899 |
| ETIM 6.0 | EC000899 |

### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211812 |
| UNSPSC 7.0901 | 39121411 |
| UNSPSC 11     | 39121411 |
| UNSPSC 12.01  | 39121411 |

# Thermomagnetic device circuit breaker - TMC 81C 05A - 2907562

## Classifications

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 13.2 | 39121620 |
|-------------|----------|

## Approvals

### Approvals

#### Approvals

UL Listed / cUL Listed / cULus Listed

#### Ex Approvals

## Approval details

|              |                                                                                     |                                                                                                                                                       |               |
|--------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| UL Listed    |   | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 320373 |
| cUL Listed   |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 320373 |
| cULus Listed |  |                                                                                                                                                       |               |