

Wiring bridge - TMC 8 B3 80 48 CA - 2907997

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Image shows ...C version

Bus bar for TMC 83... circuit breakers (two phase) with auxilliary switch. 17.8 mm pitch, up to 48 positions. Rated for 80 A (end feed) 600 V AC/DC. UL 508 Listed for connection of UL 489 rated circuit breakers.

RoHS

Key Commercial Data

Packing unit	1 pc
GTIN	 4 055626 352930
GTIN	4055626352930
Weight per Piece (excluding packing)	1.000 g
Country of origin	Germany

Technical data

Dimensions

Width	1006 mm
Height	19.3 mm
Depth	59.2 mm

General

Nominal voltage U_N	600 V AC/DC
Nominal current I_N	80 A (End feed)
	160 A (Center feed with two 115A TMC 8 B TERM PIN terminals required per phase)
Rated voltage	600 V
Number of positions	48
Color	gray


Wiring bridge - TMC 8 B3 80 48 CA - 2907997

Technical data

General

Housing material	Plastic
Type	Comb bridge

Drawings

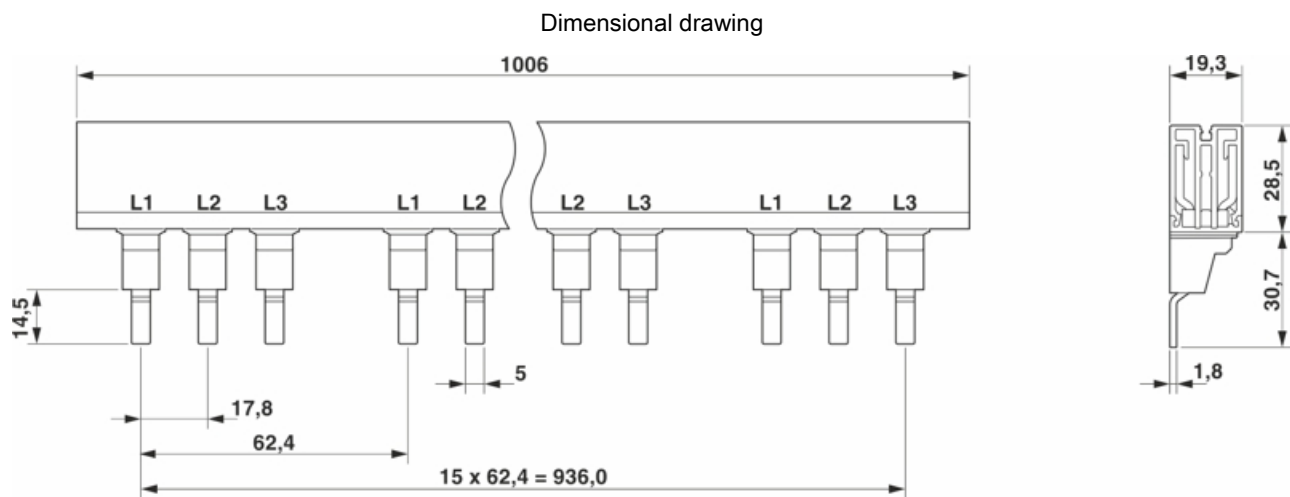

Approvals

Approvals

Approvals

UL Listed / cUL Listed / cULus Listed

Ex Approvals

Approval details

Wiring bridge - TMC 8 B3 80 48 CA - 2907997

Approvals

UL Listed



<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm>

FILE E 123528

cUL Listed



<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm>

FILE E 123528

cULus Listed

