

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



Electronic housing, for PCB insertion, without screw connection terminal blocks and cover

Your advantages

- ☑ Practical and easy-to-wire conductor connections
- Space-saving accommodation of electronic components in finely graded module versions available with 10 to 150 mm pitch
- ☑ User-friendly and safe mounting on DIN rails according to EN 60715
- ☑ Uniform and appropriate housing technology
- High degree of flexibility due to the wide choice of versions
- ☑ Inflammability class V0 insulation material (according to UL 94)
- Shock and contamination-proof accommodation of electronic components
- Universal PCBs for all pitches



Key Commercial Data

Packing unit	1 pc
Minimum order quantity	5 pc
GTIN	4 017918 082710
GTIN	4017918082710
Weight per Piece (excluding packing)	66.550 g
Custom tariff number	85472000
Country of origin	Germany

Technical data

General



Technical data

General

Housing type	Component housing
Housing material	Polycarbonate fiber reinforced
Color (RAL)	green

Ambient conditions

Ambient temperature (operation)	-40 °C 125 °C	

Dimensions

Length	75 mm
Height	47.5 mm
Width	75 mm
Pitch	5 mm
Depth	75 mm

Technical data

Power dissipation without gap	3.3 W
Power dissipation with 20 mm gap	3.9 W
Number of positions	28

Connection data

Conductor cross section solid min.	0.2 mm²
Conductor cross section solid max.	4 mm ²
Conductor cross section flexible min.	0.2 mm²
Conductor cross section flexible max.	2.5 mm²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	12
Stripping length	8 mm

Standards and Regulations


Flammability rating according to UL 94	V0
--	----


Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings






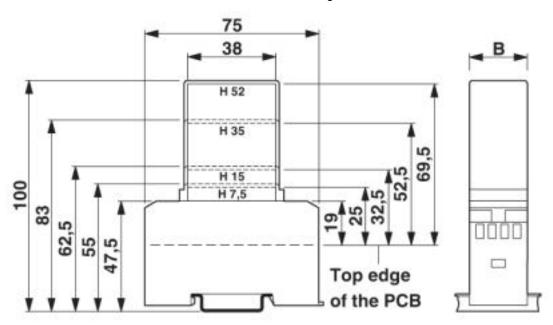


1 = Top edge of the PCB

B = Housing width





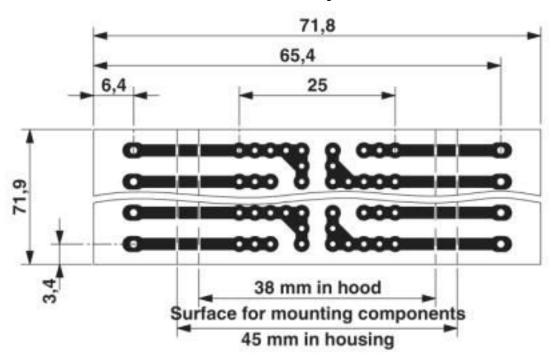

Pitch 5 mm

a = Area for mounting components, 38 mm in the hood

b = Area for mounting components, 45 mm in the housing

Classifications

eCl@ss

eCl@ss 10.0.1	27182702
eCl@ss 4.0	27180400
eCl@ss 4.1	27180400
eCl@ss 5.0	27180500
eCl@ss 5.1	27180500
eCl@ss 6.0	27180800
eCl@ss 7.0	27182702
eCl@ss 8.0	27182702
eCl@ss 9.0	27182702

ETIM

ETIM 2.0	EC001031
ETIM 3.0	EC001031
ETIM 4.0	EC001031



Classifications

ETIM

ETIM 5.0	EC001031
ETIM 6.0	EC001031
ETIM 7.0	EC001031

UNSPSC

UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501
UNSPSC 18.0	31261501
UNSPSC 19.0	31261501
UNSPSC 20.0	31261501
UNSPSC 21.0	31261501

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC

Accessories

Accessories

Device marking

B.01742



Accessories

Marking material - EMG-GKS 22 - 2941594



Device marking label, width: 22 mm, area: 22 x 8 mm, e.g. for EML(20x8) R adhesive marking material

Marking material - EMG-GKS 22 - 2941594



Device marking label, width: 22 mm, area: 22 x 8 mm, e.g. for EML(20x8) R adhesive marking material

Filler plug

Electronic housing - EMG-KA - 2941510



Terminal block/screw cover, set consisting of 50 strips each for terminal blocks and screw openings, 1 strip covers 12 terminal points.

Electronic housing - EMG-KA - 2941510



Terminal block/screw cover, set consisting of 50 strips each for terminal blocks and screw openings, 1 strip covers 12 terminal points.

PCB

Electronic housing - P 1-EMG 75 - 2947394



PCB for assembling electronic components



Accessories

Marking material - EMG-GKS 12 - 2947035



Device marking label, width: 12 mm, area: 12 x 8 mm, e.g. for EML(10x7) R adhesive marking material

Marking material - EMG-GKS 12 - 2947035



Device marking label, width: 12 mm, area: 12 x 8 mm, e.g. for EML(10x7) R adhesive marking material

Necessary add-on products

Covering hood - EMG 75-H 7,5MM KLAR - 2947954



Covering hood, for the contact and dust-protected encapsulation of the components, in transparent design. Height: 7.5 mm, width: 75 mm

Covering hood - EMG 75-H 15MM KLAR - 2947967



Covering hood, for the contact and dust-protected encapsulation of the components, in transparent design. Height: 15 mm, width: 75 mm

Covering hood - EMG 75-H 52MM GN - 2947970



Covering hood, for the contact and dust-protected encapsulation of the components, in green design. Height: 52 mm, width: 75 mm



Accessories

Phoenix Contact 2020 © - all rights reserved http://www.phoenixcontact.com