

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



Electronic housing, with universal foot, without screw connection terminal blocks and cover

Your advantages

- ☑ User-friendly and safe mounting on DIN rails according to EN 60715
- Space-saving accommodation of electronic components in finely graded module versions available with 10 to 150 mm pitch
- Uniform and appropriate housing technology
- High degree of flexibility due to the wide choice of versions
- ☐ Inflammability class V0 insulation material (according to UL 94)
- Shock and contamination-proof accommodation of electronic components
- Universal PCBs for all pitches



Key Commercial Data

| Packing unit | 1 pc |
|--------------------------------------|-----------------|
| Minimum order quantity | 10 pc |
| GTIN | 4 017918 082857 |
| GTIN | 4017918082857 |
| Weight per Piece (excluding packing) | 12.520 g |
| Custom tariff number | 85472000 |
| Country of origin | Germany |

Technical data

General



Technical data

General

| Housing type | Component housing |
|------------------|--------------------------------|
| Housing material | Polycarbonate fiber reinforced |
| Color (RAL) | green |

Ambient conditions

| Ambient temperature (storage/transport) | -40 °C 70 °C |
|---|--|
| Ambient temperature (assembly) | -5 °C 100 °C |
| Ambient temperature (operation) | -40 °C 105 °C (depending on power dissipation) |

Dimensions

| Height | 47.5 mm |
|--------|---------|
| Width | 10 mm |
| Pitch | 5 mm |
| Depth | 75 mm |

Technical data

| Power dissipation without gap | 0.9 W |
|----------------------------------|-------|
| Power dissipation with 20 mm gap | 1.2 W |
| Number of positions | 4 |

Connection data

| Conductor cross section solid min. | 0.2 mm² |
|---------------------------------------|---------|
| Conductor cross section solid max. | 4 mm² |
| Conductor cross section flexible min. | 0.2 mm² |
| Conductor cross section flexible max. | 2.5 mm² |
| Conductor cross section AWG min. | 24 |
| Conductor cross section AWG max. | 12 |
| Stripping length | 8 mm |

Standards and Regulations


| Flammability rating according to UL 94 | VO |
|--|----|


Environmental Product Compliance

| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|------------|---|
| | No hazardous substances above threshold values |


Drawings





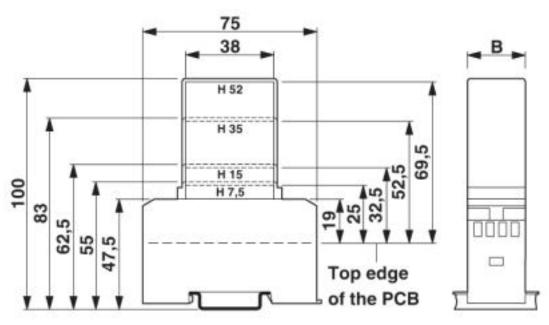

Dimensional drawing

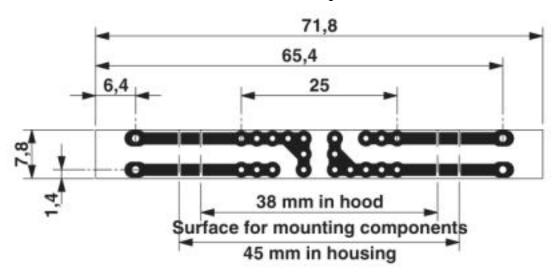

Pitch 5 mm

- a = Area for mounting components, 38 mm in the hood
- b = Area for mounting components, 45 mm in the housing



Classifications

eCl@ss

| eCl@ss 4.0 | 27180400 |
|------------|----------|
| eCl@ss 4.1 | 27180400 |
| eCl@ss 5.0 | 27180500 |
| eCl@ss 5.1 | 27180500 |
| eCl@ss 6.0 | 27180800 |
| eCl@ss 7.0 | 27182702 |
| eCl@ss 8.0 | 27182702 |
| eCl@ss 9.0 | 27182702 |

ETIM

| ETIM 2.0 | EC001031 |
|----------|----------|
| ETIM 3.0 | EC001031 |
| ETIM 4.0 | EC001031 |
| ETIM 5.0 | EC001031 |
| ETIM 6.0 | EC001031 |
| ETIM 7.0 | EC001031 |

UNSPSC

| UNSPSC 6.01 | 31261501 |
|---------------|----------|
| UNSPSC 7.0901 | 31261501 |
| UNSPSC 11 | 31261501 |
| UNSPSC 12.01 | 31261501 |
| UNSPSC 13.2 | 31261501 |

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details



Approvals

EAC

EHE

B.01742

Accessories

Accessories

Filler plug

Electronic housing - EMG-KA - 2941510



Terminal block/screw cover, set consisting of 50 strips each for terminal blocks and screw openings, 1 strip covers 12 terminal points.

PCB

Electronic housing - P 1-EMG 10 - 2947792



PCB for assembling electronic components

Marking material - EMG-SGKS 10 - 2947585



Equipment marker, narrow

Marking material - EMG-SGKS 10 - 2947585



Equipment marker, narrow



Accessories

Necessary add-on products

Electronic housing - EMG 10-H 7,5MM KLAR - 2947763

Covering hood, for the contact and dust-protected encapsulation of the components, in transparent design. Height: 7.5 mm



Electronic housing - EMG 10-H 15MM KLAR - 2947776



Covering hood, for the contact and dust-protected encapsulation of the components, in transparent design. Height: 15 mm, width: 10 mm

Electronic housing - EMG 10-H 52MM GN - 2947789



Covering hood, for the contact and dust-protected encapsulation of the components, in green design. Height: 52 mm, width: 10 mm

Phoenix Contact 2019 $\mbox{@}$ - all rights reserved http://www.phoenixcontact.com