

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



Custom circuit module, consisting of housing, MKDS 3 connection terminal blocks and PCB

Your advantages

- ☑ Choice of four cover sizes in transparent or color versions
- ☑ Practical and easy-to-wire conductor connections
- Space-saving accommodation of electronic components in finely graded module versions available with 10 to 150 mm pitch
- ☑ User-friendly and safe mounting on DIN rails according to EN 60715
- ☑ Uniform and appropriate housing technology
- High degree of flexibility due to the wide choice of versions
- ☐ Inflammability class V0 insulation material (according to UL 94)
- Shock and contamination-proof accommodation of electronic components
- Universal PCBs for all pitches



Key Commercial Data

Packing unit	1 pc
GTIN	4 017918 083106
GTIN	4017918083106
Weight per Piece (excluding packing)	233.910 g
Custom tariff number	85369010
Country of origin	Germany

Technical data

General

Housing type	Component housing



Technical data

General

Housing material	Polycarbonate fiber reinforced
Color (RAL)	green

Ambient conditions

Ambient temperature (operation)	-40 °C 125 °C
(-1	

Dimensions

Length	75 mm
Height	47.5 mm
Width	125 mm
Pitch	5 mm
Depth	75 mm

Technical data

Power dissipation without gap	9.5 W
Power dissipation with 20 mm gap	11 W
Number of positions	48

Connection data

Conductor cross section solid min.	0.2 mm²
Conductor cross section solid max.	4 mm ²
Conductor cross section flexible min.	0.2 mm²
Conductor cross section flexible max.	2.5 mm²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	12

Standards and Regulations


Flammability rating according to UL 94	V0


Environmental Product Compliance

REACh SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings






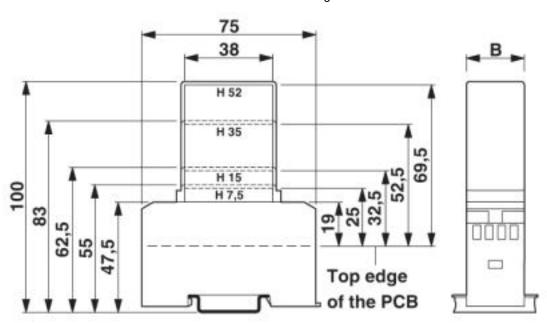

- 1 = Top edge of the PCB
- B = Housing width

Dimensional drawing

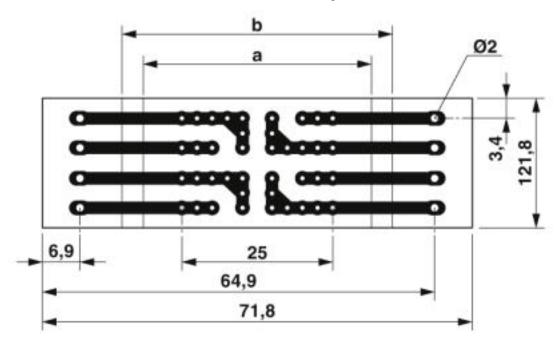



a = Area for mounting components, 38 mm in the hood

b = Area for mounting components, 45 mm in the housing

Classifications

eCl@ss

eCl@ss 4.0	27180400
eCl@ss 4.1	27180400
eCl@ss 5.0	27180500
eCl@ss 5.1	27180500
eCl@ss 6.0	27180800
eCl@ss 7.0	27182702
eCl@ss 8.0	27182702
eCl@ss 9.0	27182702

ETIM

ETIM 2.0	EC001031
ETIM 3.0	EC001031
ETIM 4.0	EC001031
ETIM 5.0	EC001031
ETIM 6.0	EC001031
ETIM 7.0	EC001031

UNSPSC

UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details



Approvals

EAC

EHE

B.01742

Accessories

Accessories

Device marking

Marking material - EMG-GKS 22 - 2941594



Device marking label, width: 22 mm, area: 22 x 8 mm, e.g. for EML(20x8) R adhesive marking material

Filler plug

Electronic housing - EMG-KA - 2941510



Terminal block/screw cover, set consisting of 50 strips each for terminal blocks and screw openings, 1 strip covers 12 terminal points.

Marking material - EMG-GKS 12 - 2947035



Device marking label, width: 12 mm, area: 12 x 8 mm, e.g. for EML(10x7) R adhesive marking material

Necessary add-on products



Accessories

Covering hood - EMG125-H 7,5MM KLAR - 2943194



Covering hood, for the contact and dust-protected encapsulation of the components, in transparent design. Height: 7.5 mm

Electronic housing - EMG125-H 15MM KLAR - 2943181



Covering hood, for the contact and dust-protected encapsulation of the components, in transparent design. Height: 15 mm, width: 125 mm

Electronic housing - EMG125-H 52MM GN - 2943518



Covering hood, for the contact and dust-protected encapsulation of the components, in green design. Height: 52 mm, width: 125 mm

Phoenix Contact 2019 @ - all rights reserved <code>http://www.phoenixcontact.com</code>