

Active module - UMK- 8 RM/MR-G24/ 1/PLC - 2979469

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE output module, with 8 miniature relays, 1 N/O contact each, plugged, for 24 V DC (incl. relay)

Why buy this product

- ✓ Narrow design width of just 55 mm (8 channels) or 202 mm (32 channels)
- ✓ LED status indicator per signal path and supply voltage
- ✓ Universal applications from 1 mA to 3 A continuous current thanks to 2-layer double contact with hard gold plating
- ✓ Freewheeling and polarity protection diode for each signal path
- ✓ Plug-in miniature relays each with an N/O contact



Key Commercial Data

Packing unit	1 STK
GTIN	 4 017918 130374
GTIN	4017918130374
Weight per Piece (excluding packing)	147.600 g
Custom tariff number	85364190
Country of origin	Germany

Technical data

Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

Dimensions

Width	56 mm
Height	90 mm

Active module - UMK- 8 RM/MR-G24/ 1/PLC - 2979469

Technical data

Dimensions

Depth	58 mm
-------	-------

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

Input data

Nominal input voltage U_N	24 V DC
Input voltage range in reference to U_N	0.8 ... 1.1
Typical input current at U_N	6.5 mA
Typical response time	5 ms
Typical release time	15 ms
Type of protection	Free-wheeling diode
Protective circuit/component	Damping diode
Type of protection	Reverse polarity protection
Protective circuit/component	Polarity protection diode
Operating voltage display	Green LED
Status display/channel	Yellow LED

Output data

Contact type	1 N/O contact
Contact material	AgNi, 5 µm hard gold-plated
Maximum switching voltage	250 V AC
	125 V DC
Minimum switching voltage	5 V
Limiting continuous current	3 A
Maximum inrush current	5 A
Min. switching current	1 mA
Interrupting rating (ohmic load) max.	72 W (24 V DC)
	60 W (48 V DC)
	50 W (60 V DC)
	50 W (110 V DC)
	750 VA (250 V AC)
Error detection (line break / short-circuit)	no

General

No. of channels	8
Compatible components	Miniature relay, REL-MR-G 24/1
With components	yes

Active module - UMK- 8 RM/MR-G24/ 1/PLC - 2979469

Technical data

General

Mechanical service life	2 x 10 ⁷ cycles
Operating mode	100% operating factor
Degree of protection	IP00
Mounting position	any
Assembly instructions	In rows with zero spacing
Color	green

Connection data for connection 1

Connection name	Controller level
Connection method	IDC/FLK pin strip
Number of connections	1
Number of positions	14
Pitch	2.54 mm

Connection data for connection 2

Connection name	Field level
Connection method	Screw connection
Stripping length	6 mm
Screw thread	M3
Conductor cross section solid	0.14 mm ² ... 1.5 mm ²
Conductor cross section flexible	0.14 mm ² ... 1.5 mm ²
Conductor cross section AWG	26 ... 14
Number of connections	16

Connection data for connection 3

Connection name	Supply
Connection method	Screw connection
Stripping length	6 mm
Screw thread	M3
Conductor cross section solid	0.14 mm ² ... 1.5 mm ²
Conductor cross section flexible	0.14 mm ² ... 1.5 mm ²
Conductor cross section AWG	26 ... 14
Number of connections	1
Number of positions	2

Supported controller

Corresponding control	SIEMENS S7-1500
Corresponding I/O card	6ES7 522-1BH00-0AB0
	6ES7 522-1BH01-0AB0

Active module - UMK- 8 RM/MR-G24/ 1/PLC - 2979469

Technical data

Supported controller

	6ES7 522-1BL00-0AB0
	6ES7 522-1BL01-0AB0
Corresponding control	ABB S800 I/O
Corresponding I/O card	DO810
	DO840
Corresponding control	ALLEN-BRADLEY ControlLogix
Corresponding I/O card	1756-OB32
	1756-OB16E
Corresponding control	ALLEN-BRADLEY PLC 5
Corresponding I/O card	1771 OBN
Corresponding control	ALLEN-BRADLEY SLC 500
Corresponding I/O card	1746 OB16
	1746 OB 32
Corresponding control	Emerson DeltaV
Corresponding I/O card	VE4002S1T1B3
	VE4002S1T2B3
	VE4002S1T2B3 Series 2
	VE4002S1T2B6
Corresponding control	GE-FANUC 90-30
Corresponding I/O card	IC693 MDL732
	IC693 MDL740
	IC693 MDL742
Corresponding control	GE-FANUC RX3i
Corresponding I/O card	IC694MDL754
Corresponding control	HONEYWELL Experion PKS C200
Corresponding I/O card	TC-ODD 321
Corresponding control	MITSUBISHI MELSEC L
Corresponding I/O card	LY41PT1P
	LY42PT1P
Corresponding control	MITSUBISHI MELSEC Q
Corresponding I/O card	QY81P
	QY82P
Corresponding control	SIEMENS S7-300 / ET 200 M
Corresponding I/O card	CPU 313C-2DP
	CPU 314C-2DP
	CPU 314C-2PtP
	6ES7 322-1BH01-0AA0

Active module - UMK- 8 RM/MR-G24/ 1/PLC - 2979469

Technical data

Supported controller

	6ES7 322-1BL00-0AA0
	6ES7 323-1BH01-0AA0
	6ES7 323-1BL00-0AA0
	CPU 313C
	CPU 313C-2PtP
Corresponding control	SIEMENS S7-400
Corresponding I/O card	6ES7 422-1BL00-0AA0
	6ES7 422-7BL00-0AB0

Standards and Regulations


Connection in acc. with standard	CUL
Standards/regulations	DIN EN 50178
	IEC 60664
Rated insulation voltage	260 V AC
Rated surge voltage	4 kV (basic insulation)
Degree of pollution	2
Overvoltage category	III

Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Circuit diagram

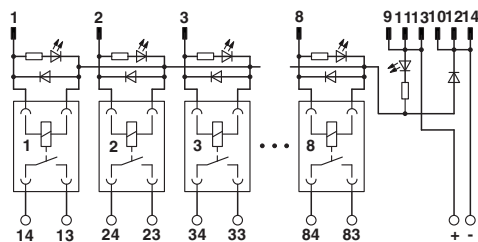

Classifications

eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313

Active module - UMK- 8 RM/MR-G24/ 1/PLC - 2979469

Classifications

eCl@ss

eCl@ss 5.0	27250313
eCl@ss 5.1	27250313
eCl@ss 7.0	27141152
eCl@ss 8.0	27141152
eCl@ss 9.0	27141152

ETIM

ETIM 5.0	EC002780
ETIM 6.0	EC002780

UNSPSC

UNSPSC 6.01	30211916
UNSPSC 7.0901	39121515
UNSPSC 11	39121515
UNSPSC 12.01	39121515
UNSPSC 13.2	39121432

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / EAC / UL Recognized / cUL Recognized / cULus Recognized

Ex Approvals

Approval details

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 238705
---------------	---	---	---------------

cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 238705
----------------	---	---	---------------

Active module - UMK- 8 RM/MR-G24/ 1/PLC - 2979469

Approvals

EAC		EAC-Zulassung
-----	---	---------------

UL Recognized			http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 238705
Nominal current I _N		3 A		
Nominal voltage U _N		24 V		

cUL Recognized			http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 238705
Nominal current I _N		3 A		
Nominal voltage U _N		24 V		

cULus Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm
------------------	---	---

Accessories

Accessories

Single relay

Single relay - REL-MR-G 24/1 - 2961037



Pluggable replacement miniature relay, 1 N/O contact, input voltage 24 V DC