


Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Protective conductor double-level terminal block, connection method: Spring-cage/plug-in connection, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, color: green-yellow, mounting type: NS 35/15, NS 35/7,5

Your advantages

- ✓ Same shape and pitch as the PIN/PIN versions of the COMBI series
- ✓ Contact is made free from mechanical and electrical errors by simply snapping onto the DIN rail
- ✓ ST ...-PE meet all the requirements of standard IEC 60947-7-2
- ✓ Tested for railway applications



Key Commercial Data

Packing unit	1 pc
Minimum order quantity	50 pc
GTIN	 4 046356 588003
GTIN	4046356588003
Weight per Piece (excluding packing)	17.200 g
Custom tariff number	85369010
Country of origin	Poland

Technical data

General

Number of levels	2
Number of connections	4
Nominal cross section	2.5 mm ²
Color	green-yellow

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Technical data

General

Insulating material	PA
Flammability rating according to UL 94	V0
Area of application	Railway industry
	Machine building
	Plant engineering
Rated surge voltage	6 kV
Degree of pollution	3
Overvoltage category	III
Insulating material group	I
Connection method	Spring-cage/plug-in connection
Connection in acc. with standard	IEC 61984
Open side panel	Yes
Insertion/withdrawal cycles mechanical	100
Oscillation, broadband noise test result	Test passed
Test specification, oscillation, broadband noise	DIN EN 50155 (VDE 0115-200):2008-03
Test spectrum	Service life test category 1, class B, body mounted
Test frequency	$f_1 = 5 \text{ Hz}$ to $f_2 = 150 \text{ Hz}$
ASD level	0.02 g ² /Hz
Acceleration	0,8 g
Test duration per axis	5 h
Test directions	X-, Y- and Z-axis
Shock test result	Test passed
Test specification, shock test	DIN EN 50155 (VDE 0115-200):2008-03
Shock form	Half-sine
Acceleration	5g
Shock duration	30 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	130 °C
Static insulating material application in cold	-60 °C
Behavior in fire for rail vehicles (DIN 5510-2)	Test passed
Flame test method (DIN EN 60695-11-10)	V0
Oxygen index (DIN EN ISO 4589-2)	>32 %
NF F16-101, NF F10-102 Class I	2
NF F16-101, NF F10-102 Class F	2

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Technical data

General

Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed
Calorimetric heat release NFPA 130 (ASTM E 1354)	28 MJ/kg
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3

Dimensions

Width	5.2 mm
Length	98.8 mm
Height NS 35/7,5	47.5 mm
Height NS 35/15	55 mm
End cover width	2.2 mm

Connection data

Connection method	Spring-cage/plug-in connection
Connection in acc. with standard	IEC 61984
Note	Please observe the current carrying capacity of the DIN rails.
Conductor cross section solid min.	0.08 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section AWG min.	28
Conductor cross section AWG max.	12
Conductor cross section flexible min.	0.08 mm ²
Conductor cross section flexible max.	2.5 mm ²
Min. AWG conductor cross section, flexible	28
Max. AWG conductor cross section, flexible	14
Conductor cross section flexible, with ferrule without plastic sleeve min.	0.14 mm ²
Conductor cross section flexible, with ferrule without plastic sleeve max.	2.5 mm ²
Conductor cross section flexible, with ferrule with plastic sleeve min.	0.14 mm ²
Conductor cross section flexible, with ferrule with plastic sleeve max.	2.5 mm ²
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max.	0.5 mm ²

Standards and Regulations

Connection in acc. with standard	CSA
	IEC 61984

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Technical data

Standards and Regulations


Flammability rating according to UL 94	V0
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Circuit diagram

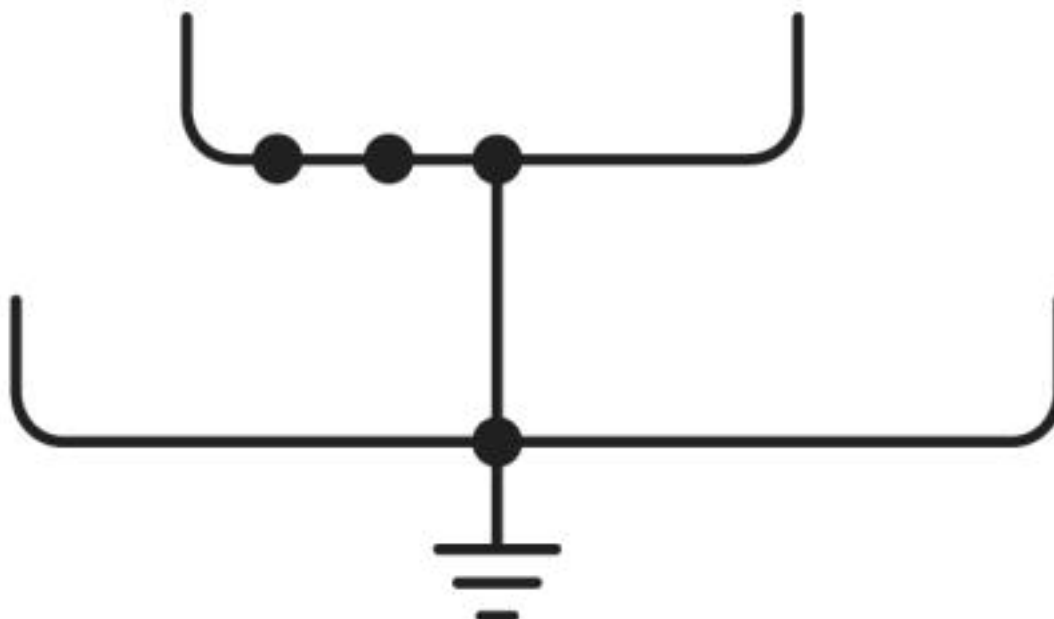

Classifications

eCl@ss

eCl@ss 4.0	27141100
eCl@ss 4.1	27141100
eCl@ss 5.0	27141100

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Classifications

eCl@ss

eCl@ss 5.1	27141100
eCl@ss 6.0	27141100
eCl@ss 7.0	27141141
eCl@ss 8.0	27141141
eCl@ss 9.0	27141141

ETIM

ETIM 2.0	EC000901
ETIM 3.0	EC000901
ETIM 4.0	EC000901
ETIM 5.0	EC000901
ETIM 6.0	EC000901
ETIM 7.0	EC000901

UNSPSC

UNSPSC 6.01	30211811
UNSPSC 7.0901	39121410
UNSPSC 11	39121410
UNSPSC 12.01	39121410
UNSPSC 13.2	39121410

Approvals

Approvals

Approvals

CSA / UL Recognized / cUL Recognized / EAC / cULus Recognized

Ex Approvals

Approval details

CSA		http://www.csagroup.org/services-industries/product-listing/	13631
-----	---	---	-------

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Approvals

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 60425
cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 60425
EAC			RU C- DE.A*30.B.01742
cULus Recognized			

Accessories

Accessories

Bridge

Wire bridge - FBSW 2-5/250MM - 3030172



Wire bridge, length: 250 mm, width: 5.1 mm, number of positions: 1, color: red/black

Wire bridge - FBSW 2-5/60MM - 3030170



Wire bridge, length: 60 mm, width: 5.1 mm, number of positions: 1, color: red/black

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

Wire bridge - FBSW 2-5/110MM - 3030171



Wire bridge, length: 110 mm, width: 5.1 mm, number of positions: 1, color: red/black

Coding element

Coding star - PC - 3040588



Coding star, length: 3 mm, width: 3 mm, height: 6 mm, color: red

Cover

Group cover marker - BST 2,5 - 3061282



Cover for actuation shaft, 5-pos., for spring-cage terminal blocks with width of 5.2 mm

DIN rail

DIN rail perforated - NS 35/ 7,5 PERF 2000MM - 0801733



DIN rail perforated, Standard profile, width: 35 mm, height: 7.5 mm, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, length: 2000 mm, color: silver

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

DIN rail, unperforated - NS 35/ 7,5 UNPERF 2000MM - 0801681



DIN rail, unperforated, Standard profile, width: 35 mm, height: 7.5 mm, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, length: 2000 mm, color: silver

DIN rail perforated - NS 35/ 7,5 WH PERF 2000MM - 1204119



DIN rail perforated, Standard profile, width: 35 mm, height: 7.5 mm, acc. to EN 60715, material: Steel, Galvanized, white passivated, length: 2000 mm, color: silver

DIN rail, unperforated - NS 35/ 7,5 WH UNPERF 2000MM - 1204122



DIN rail, unperforated, Standard profile, width: 35 mm, height: 7.5 mm, acc. to EN 60715, material: Steel, Galvanized, white passivated, length: 2000 mm, color: silver

DIN rail, unperforated - NS 35/ 7,5 AL UNPERF 2000MM - 0801704



DIN rail, unperforated, Standard profile, width: 35 mm, height: 7.5 mm, acc. to EN 60715, material: Aluminum, uncoated, length: 2000 mm, color: silver

DIN rail perforated - NS 35/ 7,5 ZN PERF 2000MM - 1206421



DIN rail perforated, Standard profile, width: 35 mm, height: 7.5 mm, acc. to EN 60715, material: Steel, galvanized, length: 2000 mm, color: silver

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

DIN rail, unperforated - NS 35/ 7,5 ZN UNPERF 2000MM - 1206434



DIN rail, unperforated, Standard profile, width: 35 mm, height: 7.5 mm, acc. to EN 60715, material: Steel, galvanized, length: 2000 mm, color: silver

DIN rail, unperforated - NS 35/ 7,5 CU UNPERF 2000MM - 0801762



DIN rail, unperforated, Standard profile, width: 35 mm, height: 7.5 mm, acc. to EN 60715, material: Copper, uncoated, length: 2000 mm, color: copper-colored

End cap - NS 35/ 7,5 CAP - 1206560



DIN rail end piece, for DIN rail NS 35/7.5

DIN rail perforated - NS 35/15 PERF 2000MM - 1201730



DIN rail perforated, Standard profile, width: 35 mm, height: 15 mm, similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, length: 2000 mm, color: silver

DIN rail, unperforated - NS 35/15 UNPERF 2000MM - 1201714



DIN rail, unperforated, Standard profile, width: 35 mm, height: 15 mm, similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, length: 2000 mm, color: silver

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

DIN rail perforated - NS 35/15 WH PERF 2000MM - 0806602



DIN rail perforated, Standard profile, width: 35 mm, height: 15 mm, similar to EN 60715, material: Steel, Galvanized, white passivated, length: 2000 mm, color: silver

DIN rail, unperforated - NS 35/15 WH UNPERF 2000MM - 1204135



DIN rail, unperforated, Standard profile, width: 35 mm, height: 15 mm, similar to EN 60715, material: Steel, Galvanized, white passivated, length: 2000 mm, color: silver

DIN rail, unperforated - NS 35/15 AL UNPERF 2000MM - 1201756



DIN rail, unperforated, Standard profile, width: 35 mm, height: 15 mm, similar to EN 60715, material: Aluminum, uncoated, length: 2000 mm, color: silver

DIN rail perforated - NS 35/15 ZN PERF 2000MM - 1206599



DIN rail perforated, Standard profile, width: 35 mm, height: 15 mm, similar to EN 60715, material: Steel, galvanized, length: 2000 mm, color: silver

DIN rail, unperforated - NS 35/15 ZN UNPERF 2000MM - 1206586



DIN rail, unperforated, Standard profile, width: 35 mm, height: 15 mm, similar to EN 60715, material: Steel, galvanized, length: 2000 mm, color: silver

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

DIN rail, unperforated - NS 35/15 CU UNPERF 2000MM - 1201895



DIN rail, unperforated, Standard profile, width: 35 mm, height: 15 mm, similar to EN 60715, material: Copper, uncoated, length: 2000 mm, color: copper-colored

End cap - NS 35/15 CAP - 1206573



DIN rail end piece, for DIN rail NS 35/15

DIN rail, unperforated - NS 35/15-2,3 UNPERF 2000MM - 1201798



DIN rail, unperforated, Standard profile 2.3 mm, width: 35 mm, height: 15 mm, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, length: 2000 mm, color: silver

Documentation

Mounting material - ST-IL - 3039900

Operating decal for the ST terminal block



End block

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

End clamp - CLIPFIX 35 - 3022218



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray

End clamp - CLIPFIX 35-5 - 3022276



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

End clamp - E/NS 35 N - 0800886



End clamp, width: 9.5 mm, color: gray

End cover

End cover - D-STTB 2,5/4P - 3061538



End cover, length: 98.9 mm, width: 2.2 mm, height: 47.5 mm, color: gray

Filler plug

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

Filler plugs - CEC 2,5 - 3062757



Cover for conductor shaft, 10-pos., for spring cage terminal blocks (ST) and terminal blocks with push-in technology (PT) with a width of 5.2 mm

Insulating sleeve

Insulating sleeve - MPS-IH WH - 0201663

Insulating sleeve, color: white



Insulating sleeve - MPS-IH RD - 0201676

Insulating sleeve, color: red



Insulating sleeve - MPS-IH BU - 0201689

Insulating sleeve, color: blue



Insulating sleeve - MPS-IH YE - 0201692

Insulating sleeve, color: yellow



Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

Insulating sleeve - MPS-IH GN - 0201702

Insulating sleeve, color: green



Insulating sleeve - MPS-IH GY - 0201728

Insulating sleeve, color: gray



Insulating sleeve - MPS-IH BK - 0201731

Insulating sleeve, color: black



Jumper

Plug-in bridge - FBS 2-5 - 3030161



Plug-in bridge, pitch: 5.2 mm, length: 22.7 mm, width: 9 mm, number of positions: 2, color: red

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

Plug-in bridge - FBS 3-5 - 3030174



Plug-in bridge, pitch: 5.2 mm, length: 22.7 mm, width: 14.2 mm, number of positions: 3, color: red

Plug-in bridge - FBS 4-5 - 3030187



Plug-in bridge, pitch: 5.2 mm, length: 22.7 mm, width: 19.4 mm, number of positions: 4, color: red

Plug-in bridge - FBS 5-5 - 3030190



Plug-in bridge, pitch: 5.2 mm, length: 23 mm, width: 24.6 mm, number of positions: 5, color: red

Plug-in bridge - FBS 10-5 - 3030213



Plug-in bridge, pitch: 5.2 mm, length: 22.7 mm, width: 50.6 mm, number of positions: 10, color: red

Plug-in bridge - FBS 20-5 - 3030226



Plug-in bridge, pitch: 5.2 mm, number of positions: 20, color: red

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

Plug-in bridge - FBS 50-5 - 3038930



Plug-in bridge, pitch: 5.2 mm, number of positions: 50, color: red

Plug-in bridge - FBS 2-5 BU - 3036877



Plug-in bridge, pitch: 5.2 mm, number of positions: 2, color: blue

Plug-in bridge - FBS 3-5 BU - 3036880



Plug-in bridge, pitch: 5.2 mm, number of positions: 3, color: blue

Plug-in bridge - FBS 4-5 BU - 3036893



Plug-in bridge, pitch: 5.2 mm, number of positions: 4, color: blue

Plug-in bridge - FBS 5-5 BU - 3036903



Plug-in bridge, pitch: 5.2 mm, number of positions: 5, color: blue

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

Plug-in bridge - FBS 10-5 BU - 3036916



Plug-in bridge, pitch: 5.2 mm, number of positions: 10, color: blue

Plug-in bridge - FBS 20-5 BU - 3036929



Plug-in bridge, pitch: 5.2 mm, number of positions: 20, color: blue

Plug-in bridge - FBS 50-5 BU - 3032114



Plug-in bridge, pitch: 5.2 mm, number of positions: 50, color: blue

Plug-in bridge - FBS 2-5 GY - 3038969



Plug-in bridge, pitch: 5.2 mm, number of positions: 2, color: gray

Plug-in bridge - FBS 3-5 GY - 3038972



Plug-in bridge, pitch: 5.2 mm, number of positions: 3, color: gray

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

Plug-in bridge - FBS 4-5 GY - 3038985



Plug-in bridge, pitch: 5.2 mm, number of positions: 4, color: gray

Plug-in bridge - FBS 5-5 GY - 3038998



Plug-in bridge, pitch: 5.2 mm, number of positions: 5, color: gray

Plug-in bridge - FBS 10-5 GY - 3039007



Plug-in bridge, pitch: 5.2 mm, number of positions: 10, color: gray

Plug-in bridge - FBS 20-5 GY - 3038671



Plug-in bridge, pitch: 5.2 mm, number of positions: 20, color: gray

Plug-in bridge - FBS 50-5 GY - 3032127



Plug-in bridge, pitch: 5.2 mm, number of positions: 50, color: gray

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

Plug-in bridge - FBSR 2-5 - 3033702



Plug-in bridge, pitch: 5.2 mm, number of positions: 2, color: red

Plug-in bridge - FBSR 3-5 - 3001591



Plug-in bridge, pitch: 5.2 mm, number of positions: 3, color: red

Plug-in bridge - FBSR 4-5 - 3001592



Plug-in bridge, pitch: 5.2 mm, number of positions: 4, color: red

Plug-in bridge - FBSR 5-5 - 3001593



Plug-in bridge, pitch: 5.2 mm, number of positions: 5, color: red

Plug-in bridge - FBSR 10-5 - 3033710



Plug-in bridge, pitch: 5.2 mm, number of positions: 10, color: red

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

Labeled terminal marker

Warning cover - WST 2,5 - 3030941



Warning cover, 5-pos., for terminal width: 5.2 mm

Zack Marker strip, flat - ZBF 5 CUS - 0825025



Zack Marker strip, flat, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

Zack Marker strip, flat - ZBF 5,LGS:FORTL.ZAHLEN - 0808671



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snap into flat marker groove, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

Zack Marker strip, flat - ZBF 5,QR:FORTL.ZAHLEN - 0808697



Zack Marker strip, flat, Strip, white, labeled, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snap into flat marker groove, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

Zack Marker strip, flat - ZBF 5,LGS:GERADE ZAHLEN - 0810821



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive numbers 2 ... 20, 22 ... 40, etc. up to 82 ... 100, mounting type: snap into flat marker groove, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

Zack Marker strip, flat - ZBF 5,LGS:UNGERADE ZAHLEN - 0810863



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: Odd numbers 1 - 19, 21 - 39, etc. up to 81 - 99, mounting type: snap into flat marker groove, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

Marker for terminal blocks - UC-TMF 5 CUS - 0824638



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 5.2 mm, lettering field size: 4.6 x 5.1 mm, Number of individual labels: 96

Marker for terminal blocks - UCT-TMF 5 CUS - 0829658



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 5.2 mm, lettering field size: 4.4 x 4.7 mm, Number of individual labels: 72

Partition plate

Partition plate - ATP-STTB 4 - 3030747



Partition plate, length: 88.7 mm, width: 2 mm, height: 53 mm, color: gray

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

Spacer plate - DP PS-5 - 3036725



Spacer plate, length: 22.4 mm, width: 5.2 mm, height: 29 mm, number of positions: 1, color: red

Screwdriver tools

Screwdriver - ST-BW - 1207608



Actuation tool, for all 2.5 mm² - 4.0 mm² spring-cages

Terminal marking

Zack Marker strip, flat - ZBF 5:UNBEDRUCKT - 0808642



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snap into flat marker groove, for terminal block width: 5 mm, lettering field size: 5.1 x 5.2 mm, Number of individual labels: 10

Marker for terminal blocks - UC-TMF 5 - 0818153



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snap into flat marker groove, for terminal block width: 5.2 mm, lettering field size: 4.6 x 5.1 mm, Number of individual labels: 96

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

Marker for terminal blocks - UCT-TMF 5 - 0828744



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snap into flat marker groove, for terminal block width: 5.2 mm, lettering field size: 4.4 x 4.7 mm, Number of individual labels: 72

Test plug terminal block

Test plugs - MPS-MT - 0201744



Test plugs, with solder connection up to 1 mm² conductor cross section, color: gray

Test plugs - PS-5 - 3030983



Test plugs, color: red

Test plugs - PS-5/2,3MM RD - 3038723



Test plugs, color: red

Test socket

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

Test adapter - PAI-4-FIX-5/6 BU - 3035975



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

Test adapter - PAI-4-FIX-5/6 OG - 3035974



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

Test adapter - PAI-4-FIX-5/6 YE - 3035977



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

Test adapter - PAI-4-FIX-5/6 RD - 3035976



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

Test adapter - PAI-4-FIX-5/6 GN - 3035978



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

Test adapter - PAI-4-FIX-5/6 BK - 3035980



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

Test adapter - PAI-4-FIX-5/6 GY - 3035982



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

Test adapter - PAI-4-FIX-5/6 VT - 3035979



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

Test adapter - PAI-4-FIX-5/6 BN - 3035981



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

Test adapter - PAI-4-FIX-5/6 WH - 3035983



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

Additional products

Plug - SP 2,5/ 1 - 3040258



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 39 mm, color: gray

Plug - SP 2,5/ 2 - 3040261



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 2, number of positions: 2, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 10.4 mm, height: 39 mm, color: gray

Plug - SP 2,5/ 3 - 3040274



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 3, number of positions: 3, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 15.6 mm, height: 39 mm, color: gray

Plug - SP 2,5/ 4 - 3040287



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 4, number of positions: 4, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 20.8 mm, height: 39 mm, color: gray

Plug - SP 2,5/ 5 - 3040290



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 5, number of positions: 5, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 26 mm, height: 39 mm, color: gray

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

Plug - SP 2,5/ 6 - 3040300



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 6, number of positions: 6, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 31.2 mm, height: 39 mm, color: gray

Plug - SP 2,5/ 7 - 3040313



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 7, number of positions: 7, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 36.4 mm, height: 39 mm, color: gray

Plug - SP 2,5/ 8 - 3040326



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 8, number of positions: 8, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 41.6 mm, height: 39 mm, color: gray

Plug - SP 2,5/ 9 - 3040339



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 9, number of positions: 9, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 46.8 mm, height: 39 mm, color: gray

Plug - SP 2,5/10 - 3040342



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 10, number of positions: 10, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 52 mm, height: 39 mm, color: gray

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

Plug - SP 2,5/11 - 3040355



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 11, number of positions: 11, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 57.2 mm, height: 39 mm, color: gray

Plug - SP 2,5/12 - 3040368



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 12, number of positions: 12, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 62.4 mm, height: 39 mm, color: gray

Plug - SP 2,5/13 - 3040371



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 13, number of positions: 13, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 67.6 mm, height: 39 mm, color: gray

Plug - SP 2,5/14 - 3040384



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 14, number of positions: 14, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 72.8 mm, height: 39 mm, color: gray

Plug - SP 2,5/15 - 3040397



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 15, number of positions: 15, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 78 mm, height: 39 mm, color: gray

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

Plug - SP 2,5/ 1 BU - 3040698



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 39 mm, color: blue

Plug - SP 2,5/ 1 GNYE - 3040708



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 39 mm, color: green-yellow

Plug - SPB 2,5/ 1 - 3040106



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 39 mm, color: gray

Plug - SPB 2,5/ 2 - 3040119



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 2, number of positions: 2, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 10.4 mm, height: 39 mm, color: gray

Plug - SPB 2,5/ 3 - 3040122



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 3, number of positions: 3, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 15.6 mm, height: 39 mm, color: gray

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

Plug - SPB 2,5/ 4 - 3040135



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 4, number of positions: 4, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 20.8 mm, height: 39 mm, color: gray

Plug - SPB 2,5/ 5 - 3040143



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 5, number of positions: 5, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 26 mm, height: 39 mm, color: gray

Plug - SPB 2,5/ 6 - 3040151



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 6, number of positions: 6, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 31.2 mm, height: 39 mm, color: gray

Plug - SPB 2,5/ 7 - 3040164



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 7, number of positions: 7, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 36.4 mm, height: 39 mm, color: gray

Plug - SPB 2,5/ 8 - 3040177



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 8, number of positions: 8, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 41.6 mm, height: 39 mm, color: gray

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

Plug - SPB 2,5/ 9 - 3040180



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 9, number of positions: 9, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 46.8 mm, height: 39 mm, color: gray

Plug - SPB 2,5/10 - 3040193



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 10, number of positions: 10, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 52 mm, height: 39 mm, color: gray

Plug - SPB 2,5/11 - 3040203



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 11, number of positions: 11, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 57.2 mm, height: 39 mm, color: gray

Plug - SPB 2,5/12 - 3040216



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 12, number of positions: 12, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 62.4 mm, height: 39 mm, color: gray

Plug - SPB 2,5/13 - 3040229



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 13, number of positions: 13, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 67.6 mm, height: 39 mm, color: gray

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

Plug - SPB 2,5/14 - 3040232



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 14, number of positions: 14, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 72.8 mm, height: 39 mm, color: gray

Plug - SPB 2,5/15 - 3040245



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 15, number of positions: 15, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 78 mm, height: 39 mm, color: gray

Plug - SPB 2,5/ 1 BU - 3040724



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 39 mm, color: blue

Plug - SPB 2,5/ 1 GNYE - 3040711



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 39 mm, color: green-yellow

Plug - SPDB 2,5/ 1 - 3040407



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 39 mm, color: gray

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

Plug - SPDB 2,5/ 2 - 3040410



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 2, number of positions: 2, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 10.4 mm, height: 39 mm, color: gray

Plug - SPDB 2,5/ 3 - 3040423



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 3, number of positions: 3, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 15.6 mm, height: 39 mm, color: gray

Plug - SPDB 2,5/ 4 - 3040436



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 4, number of positions: 4, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 20.8 mm, height: 39 mm, color: gray

Plug - SPDB 2,5/ 5 - 3040449



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 5, number of positions: 5, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 26 mm, height: 39 mm, color: gray

Plug - SPDB 2,5/ 6 - 3040452



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 6, number of positions: 6, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 31.2 mm, height: 39 mm, color: gray

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

Plug - SPDB 2,5/ 7 - 3040465



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 7, number of positions: 7, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 36.4 mm, height: 39 mm, color: gray

Plug - SPDB 2,5/ 8 - 3040478



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 8, number of positions: 8, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 41.6 mm, height: 39 mm, color: gray

Plug - SPDB 2,5/ 9 - 3040481



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 9, number of positions: 9, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 46.8 mm, height: 39 mm, color: gray

Plug - SPDB 2,5/10 - 3040494



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 10, number of positions: 10, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 52 mm, height: 39 mm, color: gray

Plug - SPDB 2,5/11 - 3040504



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 11, number of positions: 11, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 57.2 mm, height: 39 mm, color: gray

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

Plug - SPDB 2,5/12 - 3040517



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 12, number of positions: 12, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 62.4 mm, height: 39 mm, color: gray

Plug - SPDB 2,5/13 - 3040520



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 13, number of positions: 13, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 67.6 mm, height: 39 mm, color: gray

Plug - SPDB 2,5/14 - 3040533



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 14, number of positions: 14, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 72.8 mm, height: 39 mm, color: gray

Plug - SPDB 2,5/15 - 3040546



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 15, number of positions: 15, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 78 mm, height: 39 mm, color: gray

Plug - SPDB 2,5/ 1 BU - 3040737



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 39 mm, color: blue

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

Plug - SPDB 2,5/ 1 GNYE - 3040740



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 39 mm, color: green-yellow

Plug - SP-H 2,5/ 1 - 3210619



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 39 mm, color: gray

Plug - SP-H 2,5/ 2 - 3210622



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 2, number of positions: 2, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 10.4 mm, height: 39 mm, color: gray

Plug - SP-H 2,5/ 3 - 3210635



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 3, number of positions: 3, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 15.6 mm, height: 39 mm, color: gray

Plug - SP-H 2,5/ 4 - 3210648



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 4, number of positions: 4, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 20.8 mm, height: 39 mm, color: gray

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

Plug - SP-H 2,5/ 5 - 3210651



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 5, number of positions: 5, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 26 mm, height: 39 mm, color: gray

Plug - SP-H 2,5/ 6 - 3210664



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 6, number of positions: 6, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 31.2 mm, height: 39 mm, color: gray

Plug - SP-H 2,5/ 7 - 3210677



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 7, number of positions: 7, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 36.4 mm, height: 39 mm, color: gray

Plug - SP-H 2,5/ 8 - 3210680



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 8, number of positions: 8, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 41.6 mm, height: 39 mm, color: gray

Plug - SP-H 2,5/ 9 - 3210693



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 9, number of positions: 9, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 46.8 mm, height: 39 mm, color: gray

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

Plug - SP-H 2,5/10 - 3210703



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 10, number of positions: 10, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 52 mm, height: 39 mm, color: gray

Plug - SP-H 2,5/11 - 3210716



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 11, number of positions: 11, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 57.2 mm, height: 39 mm, color: gray

Plug - SP-H 2,5/12 - 3210729



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 12, number of positions: 12, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 62.4 mm, height: 39 mm, color: gray

Plug - SP-H 2,5/13 - 3210732



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 13, number of positions: 13, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 67.6 mm, height: 39 mm, color: gray

Plug - SP-H 2,5/14 - 3210745



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 14, number of positions: 14, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 72.8 mm, height: 39 mm, color: gray

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

Plug - SP-H 2,5/15 - 3210758



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 15, number of positions: 15, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 78 mm, height: 39 mm, color: gray

Plug - SP-H 2,5/ 1 BU - 3210761



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 39 mm, color: blue

Plug - SP-H 2,5/ 1 GNYE - 3210774



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 39 mm, color: green-yellow

Plug - SP-H 2,5/ 1-L - 3210787



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 39 mm, color: gray

Plug - SP-H 2,5/ 1-L BU - 3210790



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 39 mm, color: blue

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

Plug - SP-H 2,5/ 1-L GNYE - 3210800



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 39 mm, color: green-yellow

Plug - SP-H 2,5/ 1-M - 3210813



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 39 mm, color: gray

Plug - SP-H 2,5/ 1-M BU - 3210826



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 39 mm, color: blue

Plug - SP-H 2,5/ 1-M GNYE - 3210839



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 39 mm, color: green-yellow

Plug - SP-H 2,5/ 1-R - 3210842



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 39 mm, color: gray

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

Plug - SP-H 2,5/ 1-R BU - 3210855



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 39 mm, color: blue

Plug - SP-H 2,5/ 1-R GNYE - 3210868



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 39 mm, color: green-yellow

Plug - SPV 2,5/ 1 - 3041710



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 34 mm, color: gray

Plug - SPV 2,5/ 2 - 3041723



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 2, number of positions: 2, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 10.4 mm, height: 34 mm, color: gray

Plug - SPV 2,5/ 3 - 3041736



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 3, number of positions: 3, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 15.6 mm, height: 34 mm, color: gray

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

Plug - SPV 2,5/ 4 - 3041749



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 4, number of positions: 4, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 20.8 mm, height: 34 mm, color: gray

Plug - SPV 2,5/ 5 - 3041752



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 5, number of positions: 5, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 26 mm, height: 34 mm, color: gray

Plug - SPV 2,5/ 6 - 3041765



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 6, number of positions: 6, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 31.2 mm, height: 34 mm, color: gray

Plug - SPV 2,5/ 7 - 3041778



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 7, number of positions: 7, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 36.4 mm, height: 34 mm, color: gray

Plug - SPV 2,5/ 8 - 3041781



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 8, number of positions: 8, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 41.6 mm, height: 34 mm, color: gray

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

Plug - SPV 2,5/ 9 - 3041794



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 9, number of positions: 9, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 46.8 mm, height: 34 mm, color: gray

Plug - SPV 2,5/10 - 3041804



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 10, number of positions: 10, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 52 mm, height: 34 mm, color: gray

Plug - SPV 2,5/11 - 3041817



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 11, number of positions: 11, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 57.2 mm, height: 34 mm, color: gray

Plug - SPV 2,5/12 - 3041820



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 12, number of positions: 12, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 62.4 mm, height: 34 mm, color: gray

Plug - SPV 2,5/13 - 3041833



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 13, number of positions: 13, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 67.6 mm, height: 34 mm, color: gray

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

Plug - SPV 2,5/14 - 3041846



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 14, number of positions: 14, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 72.8 mm, height: 34 mm, color: gray

Plug - SPV 2,5/15 - 3041859



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 15, number of positions: 15, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 78 mm, height: 34 mm, color: gray

Plug - SPV 2,5/ 1 BU - 3061017



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 34 mm, color: blue

Plug - SPV 2,5/ 1 GNYE - 3061020



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 34 mm, color: green-yellow

Plug - SPV 2,5/ 1-L - 3041024



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 34 mm, color: gray

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

Plug - SPV 2,5/ 1-L BU - 3041037



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 34 mm, color: blue

Plug - SPV 2,5/ 1-L GNYE - 3041040



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 34 mm, color: green-yellow

Plug - SPV 2,5/ 1-M - 3041053



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 34 mm, color: gray

Plug - SPV 2,5/ 1-M BU - 3041066



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 34 mm, color: blue

Plug - SPV 2,5/ 1-M GNYE - 3041079



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 34 mm, color: green-yellow

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

Plug - SPV 2,5/ 1-R - 3041082



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 34 mm, color: gray

Plug - SPV 2,5/ 1-R BU - 3041095



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 34 mm, color: blue

Plug - SPV 2,5/ 1-R GNYE - 3041105



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 34 mm, color: green-yellow

Plug - PP-H 2,5/ 1 - 3209866



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in connection, number of connections: 1, number of positions: 1, cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, width: 5.2 mm, height: 40.2 mm, color: gray, mounting type: Plug-in mounting

Plug - PP-H 2,5/ 2 - 3209879



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in connection, number of connections: 2, number of positions: 2, cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, width: 10.4 mm, height: 40.2 mm, color: gray, mounting type: Plug-in mounting

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

Plug - PP-H 2,5/ 3 - 3209882



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in connection, number of connections: 3, number of positions: 3, cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, width: 15.6 mm, height: 40.2 mm, color: gray

Plug - PP-H 2,5/ 4 - 3209895



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in connection, number of connections: 4, number of positions: 4, cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, width: 20.8 mm, height: 40.2 mm, color: gray

Plug - PP-H 2,5/ 5 - 3209905



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in connection, number of connections: 5, number of positions: 5, cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, width: 26 mm, height: 40.2 mm, color: gray, mounting type: Plug-in mounting

Plug - PP-H 2,5/ 6 - 3209918



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in connection, number of connections: 6, number of positions: 6, cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, width: 31.2 mm, height: 40.2 mm, color: gray, mounting type: Plug-in mounting

Plug - PP-H 2,5/ 7 - 3209921



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in connection, number of connections: 7, number of positions: 7, cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, width: 36.4 mm, height: 40.2 mm, color: gray

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

Plug - PP-H 2,5/ 8 - 3209934



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in connection, number of connections: 8, number of positions: 8, cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, width: 41.6 mm, height: 40.2 mm, color: gray, mounting type: Plug-in mounting

Plug - PP-H 2,5/ 9 - 3209947



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in connection, number of connections: 9, number of positions: 9, cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, width: 46.8 mm, height: 40.2 mm, color: gray

Plug - PP-H 2,5/10 - 3209950



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in connection, number of connections: 10, number of positions: 10, cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, width: 52 mm, height: 40.2 mm, color: gray

Plug - PP-H 2,5/11 - 3209963



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in connection, number of connections: 11, number of positions: 11, cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, width: 57.2 mm, height: 40.2 mm, color: gray

Plug - PP-H 2,5/12 - 3209976



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in connection, number of connections: 12, number of positions: 12, cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, width: 62.4 mm, height: 40.2 mm, color: gray

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

Plug - PP-H 2,5/13 - 3209989



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in connection, number of connections: 13, number of positions: 13, cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, width: 67.6 mm, height: 40.2 mm, color: gray

Plug - PP-H 2,5/14 - 3209992



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in connection, number of connections: 14, number of positions: 14, cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, width: 72.8 mm, height: 40.2 mm, color: gray

Plug - PP-H 2,5/15 - 3210004



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in connection, number of connections: 15, number of positions: 15, cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, width: 78 mm, height: 40.2 mm, color: gray

Plug - PP-H 2,5/1-L - 3210062



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in connection, number of connections: 1, number of positions: 1, cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, width: 5.2 mm, height: 40.2 mm, color: gray

Plug - PP-H 2,5/1-M - 3210091



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in connection, number of connections: 1, number of positions: 1, cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, width: 5.2 mm, height: 40.2 mm, color: gray

Protective conductor double-level terminal block - STTB 2,5/4P-PE - 3061499

Accessories

Plug - PP-H 2,5/1-R - 3210127



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in connection, number of connections: 1, number of positions: 1, cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, width: 5.2 mm, height: 40.2 mm, color: gray