

Cable duct - CGS 50 - 3071400

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Cable duct, with closed swivel joint, Length: 218 mm, Width: 68 mm, Height: 140.5 mm, Diameter: 42 mm, Color: gray



Why buy this product

- ✓ Route pre-assembled cables and conductors easily, thanks to the patent-pending swivel joint
- ✓ Mechanical cable protection and bundling, thanks to protective covers that can be attached without tools
- ✓ Integrated flanges with strain relief make assembly quick and easy
- ✓ Easily plan cable harnesses: the cable length is predefined through the swivel arm
- ✓ Cable routing for the control cabinet door can be planned in the CAD system, thanks to the defined installation space and swivel range
- ✓ High-grade elastic and mechanically resilient plastic, certified according to UL 94 for flammability rating: V0

RoHS

Key Commercial Data

Packing unit	1 STK
GTIN	 4 055626 289182
GTIN	4055626289182
Weight per Piece (excluding packing)	1.000 g
Custom tariff number	39259020
Country of origin	Poland

Technical data

General

Note	Cable binders can be used up to a width of 4 mm and from a length of 40 mm
Color	gray
Insulating material	PC

Cable duct - CGS 50 - 3071400

Technical data

General

Flammability rating according to UL 94	V0
Number of cables	100 for 1.5 mm ²
Cable feed-through	Cables can be pulled through at an angle between 120° and 180°.
	Conductor bundles up to 22 mm in diameter can be fed in.

Dimensions

Width	68 mm
Length	218 mm
Height	140.5 mm
Diameter	42 mm
Hole diameter	5.5 mm
Marking field	36,8 x 27,2 mm
Cable length	700 mm ... 460 mm

Standards and Regulations


Flammability rating according to UL 94	V0
--	----

Environmental Product Compliance


China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Dimensional drawing

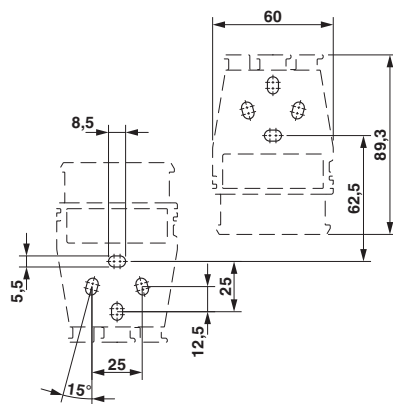


Dimensional drawing

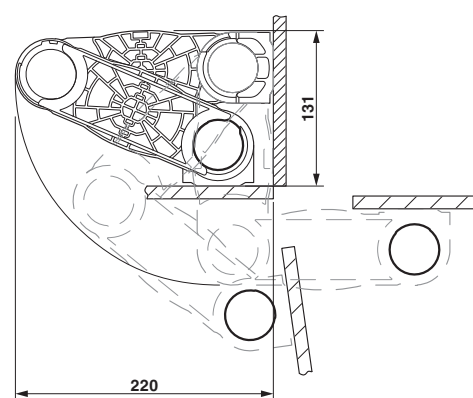


Cable duct - CGS 50 - 3071400

Dimensional drawing

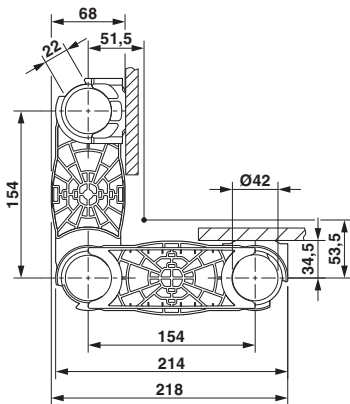

Dimensional drawing

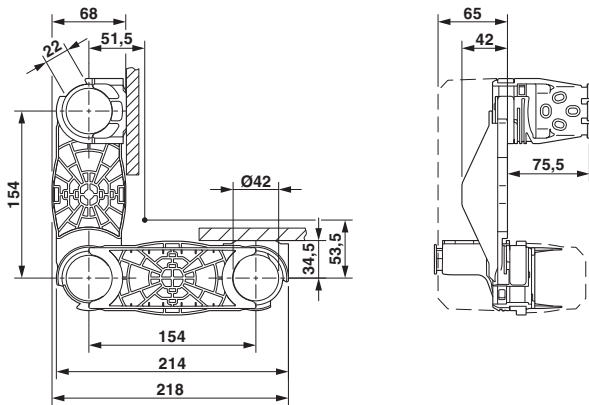

Classifications

eCl@ss

eCl@ss 4.0	27140602
eCl@ss 4.1	27140602
eCl@ss 5.0	27140602
eCl@ss 5.1	27140602
eCl@ss 6.0	27400703
eCl@ss 7.0	27400703
eCl@ss 8.0	27189261
eCl@ss 9.0	27189261

ETIM

ETIM 2.0	EC000012
ETIM 3.0	EC000012

Cable duct - CGS 50 - 3071400

Classifications

ETIM

ETIM 4.0	EC000012
ETIM 5.0	EC002620

UNSPSC

UNSPSC 6.01	30101815
UNSPSC 7.0901	30101815
UNSPSC 11	30101815
UNSPSC 12.01	30101815
UNSPSC 13.2	30101815

Accessories

Accessories

Cable tie

Cable tie - PKB 100X2,5 - 1005457



Cable tie, dimensions: L x W, 100 x 2.5 mm, color: transparent

Cable tie - PKB 100X2,5 BK - 1005512



Cable tie, resistant to UV rays, dimensions: L x W, 100 x 2.5 mm, color: black

Cable tie - PKB 140X3,6 - 1005460



Cable tie, dimensions: L x W, 140 x 3.6 mm, color: transparent

Cable duct - CGS 50 - 3071400

Accessories

Cable tie - PKB 140X3,6 BK - 1005525



Cable tie, resistant to UV rays, dimensions: L x W, 140 x 3.6 mm, color: black

Cable tie - PKB 200X2,5 - 1005486



Cable tie, dimensions: L x W, 200 x 2.5 mm, color: transparent

Cable tie - PKB 200X2,5 BK - 1005541



Cable tie, resistant to UV rays, dimensions: L x W, 200 x 2.5 mm, color: black

Cable tie - WT-HF 2,5X98 - 3240732



Cable binders for quick and secure bundling, standard version

Cable tie - WT-HF 2,5X98 BK - 3240733



Cable binders for quick and secure bundling, standard version

Cable duct - CGS 50 - 3071400

Accessories

Cable tie - WT-HF 2,5X98 BK-L - 3240734



Cable binders for quick and secure bundling, standard version

Cable tie - WT-HF 2,5X98-L - 3240735



Cable binders for quick and secure bundling, standard version

Cable tie - WT-HF 2,6X160 - 3240736



Cable binders for quick and secure bundling, standard version

Cable tie - WT-HF 2,6X160 BK - 3240737



Cable binders for quick and secure bundling, standard version

Cable tie - WT-HF 2,6X160 BK-L - 3240738



Cable binders for quick and secure bundling, standard version

Cable duct - CGS 50 - 3071400

Accessories

Cable tie - WT-HF 2,6X160-L - 3240739



Cable binders for quick and secure bundling, standard version

Cable tie - WT-HF 2,6X200 - 3240740



Cable binders for quick and secure bundling, standard version

Cable tie - WT-HF 2,6X200 BK - 3240741



Cable binders for quick and secure bundling, standard version

Cable tie - WT-HF 2,6X200 BK-L - 3240742



Cable binders for quick and secure bundling, standard version

Cable tie - WT-HF 2,6X200-L - 3240743



Cable binders for quick and secure bundling, standard version

Cable duct - CGS 50 - 3071400

Accessories

Cable tie - WT-HF 3,6X140 - 3240744



Cable binders for quick and secure bundling, standard version

Cable tie - WT-HF 3,6X140 BK - 3240745



Cable binders for quick and secure bundling, standard version

Cable tie - WT-HF 3,6X140 BK-L - 3240746



Cable binders for quick and secure bundling, standard version

Cable tie - WT-HF 3,6X140-L - 3240747



Cable binders for quick and secure bundling, standard version

Cable tie - WT-HF 3,6X200 - 3240748



Cable binders for quick and secure bundling, standard version

Cable duct - CGS 50 - 3071400

Accessories

Cable tie - WT-HF 3,6X200 BK - 3240749



Cable binders for quick and secure bundling, standard version

Cable tie - WT-HF 3,6X200 BK-L - 3240750



Cable binders for quick and secure bundling, standard version

Cable tie - WT-HF 3,6X200-L - 3240751



Cable binders for quick and secure bundling, standard version

Cable tie - WT-HF 3,6X290 - 3240752



Cable binders for quick and secure bundling, standard version

Cable tie - WT-HF 3,6X290 BK - 3240753



Cable binders for quick and secure bundling, standard version

Cable duct - CGS 50 - 3071400

Accessories

Cable tie - WT-HF 3,6X290 BK-L - 3240754



Cable binders for quick and secure bundling, standard version

Cable tie - WT-HF 3,6X290-L - 3240755



Cable binders for quick and secure bundling, standard version

Cable tie - WT-HP HF 3,6X140 - 0830982



Cable binders for quick and secure bundling, standard version

Cable tie - WT-HT HF 2,5X98 - 3240780



Cable binders for quick and secure bundling, heat stabilized to 125°C (also up to 145°C for brief periods)

Cable tie - WT-HT HF 2,5X98 BK - 3240781



Cable binders for quick and secure bundling, heat stabilized to 125°C (also up to 145°C for brief periods)

Cable duct - CGS 50 - 3071400

Accessories

Cable tie - WT-HT HF 3,6X140 - 3240782



Cable binders for quick and secure bundling, heat stabilized to 125°C (also up to 145°C for brief periods)

Cable tie - WT-HT HF 3,6X140 BK - 3240783



Cable binders for quick and secure bundling, heat stabilized to 125°C (also up to 145°C for brief periods)

Cable tie - WT-HT HF 3,6X200 - 3240784



Cable binders for quick and secure bundling, heat stabilized to 125°C (also up to 145°C for brief periods)

Cable tie - WT-HT HF 3,6X200 BK - 3240785



Cable binders for quick and secure bundling, heat stabilized to 125°C (also up to 145°C for brief periods)

Cable tie - WT-ID HF 2,5X98 BU - 3240794



Cable binders for quick and secure fastening, can be detected using metallic pigments

Cable duct - CGS 50 - 3071400

Accessories

Cable tie - WT-ID HF 3,5X140 BU - 3240795



Cable binders for quick and secure fastening, can be detected using metallic pigments

Cable tie - WT-ID HF 3,5X200 BU - 3240796



Cable binders for quick and secure fastening, can be detected using metallic pigments

Cable tie - WT-R HF 3,6X150 - 3240801



Cable binders, with molded body-bound rivet, also ideally suited to restricted installation dimensions

Cable tie - WT-R HF 4,8X200 - 3240803



Cable binders, with molded body-bound rivet, also ideally suited to restricted installation dimensions

Cable tie - WT-UV HF 2,5X98 BK - 3240831



Cable binders for quick and permanent fastening, UV-resistant and weatherproof (ISO 4892_QUV-B 600 h)

Cable duct - CGS 50 - 3071400

Accessories

Cable tie - WT-UV HF 3,6X140 BK - 3240832



Cable binders for quick and permanent fastening, UV-resistant and weatherproof (ISO 4892_QUV-B 600 h)

Cable tie - WT-UV HF 3,6X200 BK - 3240833



Cable binders for quick and permanent fastening, UV-resistant and weatherproof (ISO 4892_QUV-B 600 h)

Cover profile

Cover - CGS-AH 50 - 3071410



Cover, packed in pairs, Length: 214 mm, Width: 63 mm, Height: 54.5 mm, Color: gray
