

## Cable sleeve - CES-SRG-BK-2X6 - 0801664

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Small, slotted cable sleeves suitable for two cables with a diameter of 5 ... 6 mm, material: NBR

### Product Description

Slotted sleeves for accommodating two cables with a diameter of 5 ... 6 mm, can be used in CEL sealing frames. When fitted, the sleeves also ensure strain relief according to DIN EN 50262.

### Key Commercial Data

|              |                                                                                                         |
|--------------|---------------------------------------------------------------------------------------------------------|
| Packing unit | 10 STK                                                                                                  |
| GTIN         | <br>4 046356 674454 |

### Technical data

#### Dimensions

|                         |                  |
|-------------------------|------------------|
| External cable diameter | 2x 5 mm ... 6 mm |
| Length                  | 29.5 mm          |
| Width                   | 19.5 mm          |
| Height                  | 17 mm            |

#### Ambient conditions

|                                 |                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------|
| Degree of protection            | IP54 (for sealing frames with screw locking. IP44 sealing frames with locking latch.) |
| Ambient temperature (operation) | -40 °C ... 125 °C (static)                                                            |

#### General

|                     |                                                                                                                                                                                              |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product description | Slotted sleeves for accommodating two cables with a diameter of 5 ... 6 mm, can be used in CEL sealing frames. When fitted, the sleeves also ensure strain relief according to DIN EN 50262. |
| No. of conductors   | 2                                                                                                                                                                                            |
| Material            | NBR                                                                                                                                                                                          |
| Color               | black                                                                                                                                                                                        |

## Cable sleeve - CES-SRG-BK-2X6 - 0801664

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27081002 |
| eCl@ss 4.1 | 27081002 |
| eCl@ss 5.0 | 27081002 |
| eCl@ss 5.1 | 27081002 |
| eCl@ss 6.0 | 27081002 |
| eCl@ss 7.0 | 27081002 |
| eCl@ss 8.0 | 27069216 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC000879 |
| ETIM 4.0 | EC000451 |
| ETIM 5.0 | EC000451 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30212109 |
| UNSPSC 7.0901 | 39121708 |
| UNSPSC 11     | 39121708 |
| UNSPSC 12.01  | 39121708 |
| UNSPSC 13.2   | 39121708 |

### Approvals

#### Approvals

---

Approvals

GL

---

Ex Approvals

---

Approvals submitted

---


Approval details

|    |
|----|
| GL |
|----|

### Drawings

## Cable sleeve - CES-SRG-BK-2X6 - 0801664

Dimensional drawing

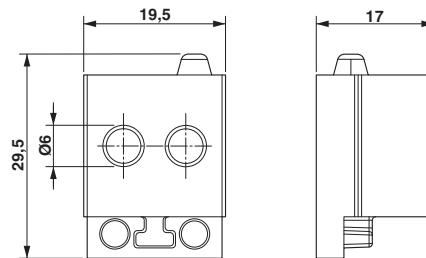

Dimensional drawing

---

Phoenix Contact 2016 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>