

Flush-type connector - SACC-CI-M12MSB-5P SMD T - 1411927

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Flush-type connector, 5-position, PlugLink:straightLink:M12, B - inverse, PCB mounting, SMD

Why buy this product

- Reduced mounting costs thanks to two-piece device connector
- Packaging available for automated pick and place assembly
- All common pin assignments and codings available
- Easy device integration thanks to mechanical port screw connections with threaded attachment, press-in contour or direct integration in the front plate

Key Commercial Data

Packing unit	60 STK
Minimum order quantity	60 STK
GTIN	 4 046356 990059

Technical data

Ambient conditions

Ambient temperature (operation)	-55 °C ... 105 °C (Plug / socket)
	-55 °C ... 105 °C (without mechanical actuation)
Degree of protection	IP67 (correctly plugged in and locked)

General

Note	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.
Rated current at 40°C	4 A
Rated voltage	60 V
Rated surge voltage	1.5 kV
Number of positions	5
Insulation resistance	≥ 100 MΩ
Coding	B - inverse
Standards/regulations	M12 connector IEC 61076-2-101 In line with

Technical data

Overvoltage category	III
Degree of pollution	3
Connection method	SMD
Insertion/withdrawal cycles	> 100
Mounting type	PCB mounting
Type of packaging	Tray

Flammability rating according to UL 94	V0
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA

Standard designation	M12 connector
Standards/regulations	IEC 61076-2-101
Flammability rating according to UL 94	V0

eCl@ss 5.1	27143423
eCl@ss 6.0	27143423
eCl@ss 8.0	27440103

ETIM 5.0	EC002061
----------	----------


Technical drawing of a mechanical part with dimensions:

- Overall width: $\varnothing 2,5$
- Top hole diameter: $\varnothing 1,5^{+0,03}$
- Left side hole diameter: $\varnothing 1,5$
- Left side hole offset from top: 2,25
- Left side hole offset from bottom: 13,6
- Right side hole diameter: $\varnothing 1,1^{+0,03}$
- Right side hole offset from top: 3,54
- Right side hole offset from bottom: 9 $^{+0,02}$
- Bottom hole diameter: $\varnothing 1,1^{+0,03}$
- Bottom hole offset from right side hole: 7,85

03/10/2016 Page 2 / 3


Flush-type connector - SACC-CI-M12MSB-5P SMD T - 1411927

Dimensional drawing

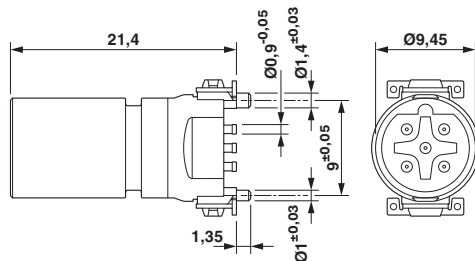


M12 male connector contact carrier

Dimensional drawing



View of solder side

Dimensional drawing

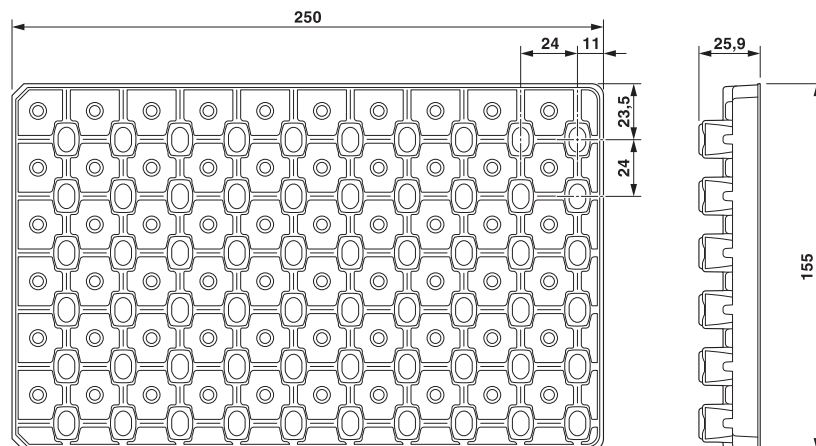

SMD tray packaging

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>