

Jumper - BRIDGE- 9 - 2900753

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

3-phase loop bridge for 9 CONTACTRON modules, with screw connection and 22.5 mm housing width, connecting cable: 0.3 m, with ferrules.



Figure shows variant for 3 modules

Why buy this product

- Only suitable for CONTACTRON series with screw connection ELR H3...-SC-..., ELR H5...-SC-..., ELR (W)3..., EMM...IFS
- Bridging of 2 to 10 devices with maximum module spacing of 22.5 mm
- Considerable reduction in wiring
- Up to 575 V AC/3 x 25 A

Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 528511

Technical data

Dimensions

Length of the connecting cable	0.3 m
--------------------------------	-------

General

Operating voltage range	42 V AC ... 575 V AC
Operating current	≤ 25 A
Number of bridgeable modules	9
Connecting cable length	0.3 m

Classifications

eCl@ss

eCl@ss 4.0	27371190
eCl@ss 4.1	27371190
eCl@ss 5.0	27371692
eCl@ss 5.1	27371692
eCl@ss 6.0	27141140
eCl@ss 7.0	27141140

Jumper - BRIDGE- 9 - 2900753

Classifications

eCl@ss

eCl@ss 8.0	27141140
------------	----------

ETIM

ETIM 2.0	EC000489
ETIM 3.0	EC000489
ETIM 4.0	EC000489
ETIM 5.0	EC000489

UNSPSC

UNSPSC 6.01	30211802
UNSPSC 7.0901	39121402
UNSPSC 11	39121402
UNSPSC 12.01	39121402
UNSPSC 13.2	39121402

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approvals submitted


Approval details

EAC

Drawings

Jumper - BRIDGE- 9 - 2900753

Application drawing

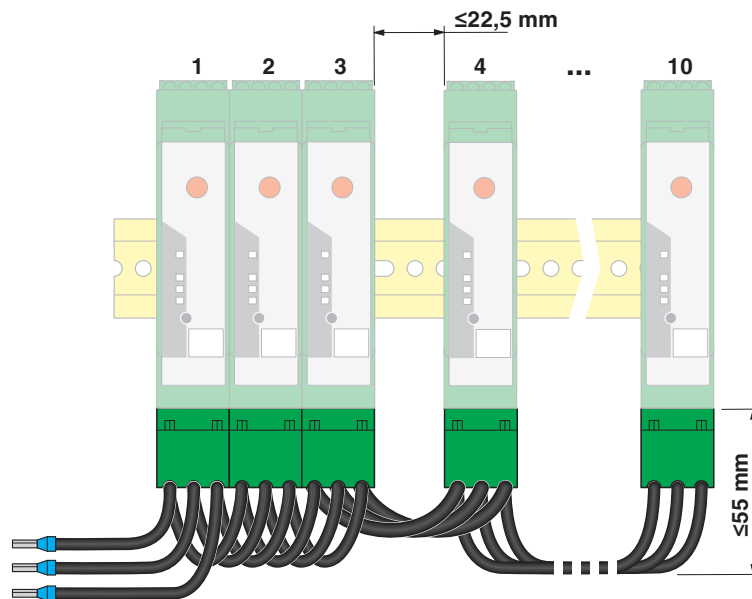

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>